

Illustrated Magazine in the World

Reg. U.S. Pat. Off.

Popular Science

FOUNDED MONTHLY



Leviathan, Famous Ferry of the A. E. F., Becomes Most Palatial Ocean Liner (Page 32)

Beginning "The Story of Man and His World"

MARCH

How to Drive Your Car Like an Expert (Page 43)

25 C



"You're on the right track-son"

Your selection of Starrett Tools does you credit. I'm always glad to see a youngster start off the Starrett way—it's the *right* way. I've seen a lot of them start in my day and those that stick and go the farthest are the ones who've got the tools to handle every job *right*.

Any of the "crack" men in the metal working trades will tell you the same thing—some of them right in our own shop have been living with Starrett Tools for forty years now. They *know* it pays to own the best.

Starrett Catalog No. 22W describing over 2100 fine precision tools free on request.
Write also for the Supplement, showing the newest tools
used in the best shop practice.

THE L. S. STARRETT CO.

The World's Greatest Toolmakers—Manufacturers of Hacksaws Unexcelled
ATHOL, MASS.



Use Starrett Tools

4811




Yankee One Inch Micrometer Caliper (No. 650)

For measurements by thousandths up to one inch. Frame is made of drop forged steel, nickel plated, dull finish. Has improved speeded screw with means for adjusting to compensate for wear. An unusually accurate "mike" at a most attractive price.



People express themselves
in their possessions. Not
by the cost but by the
merit of those possessions.

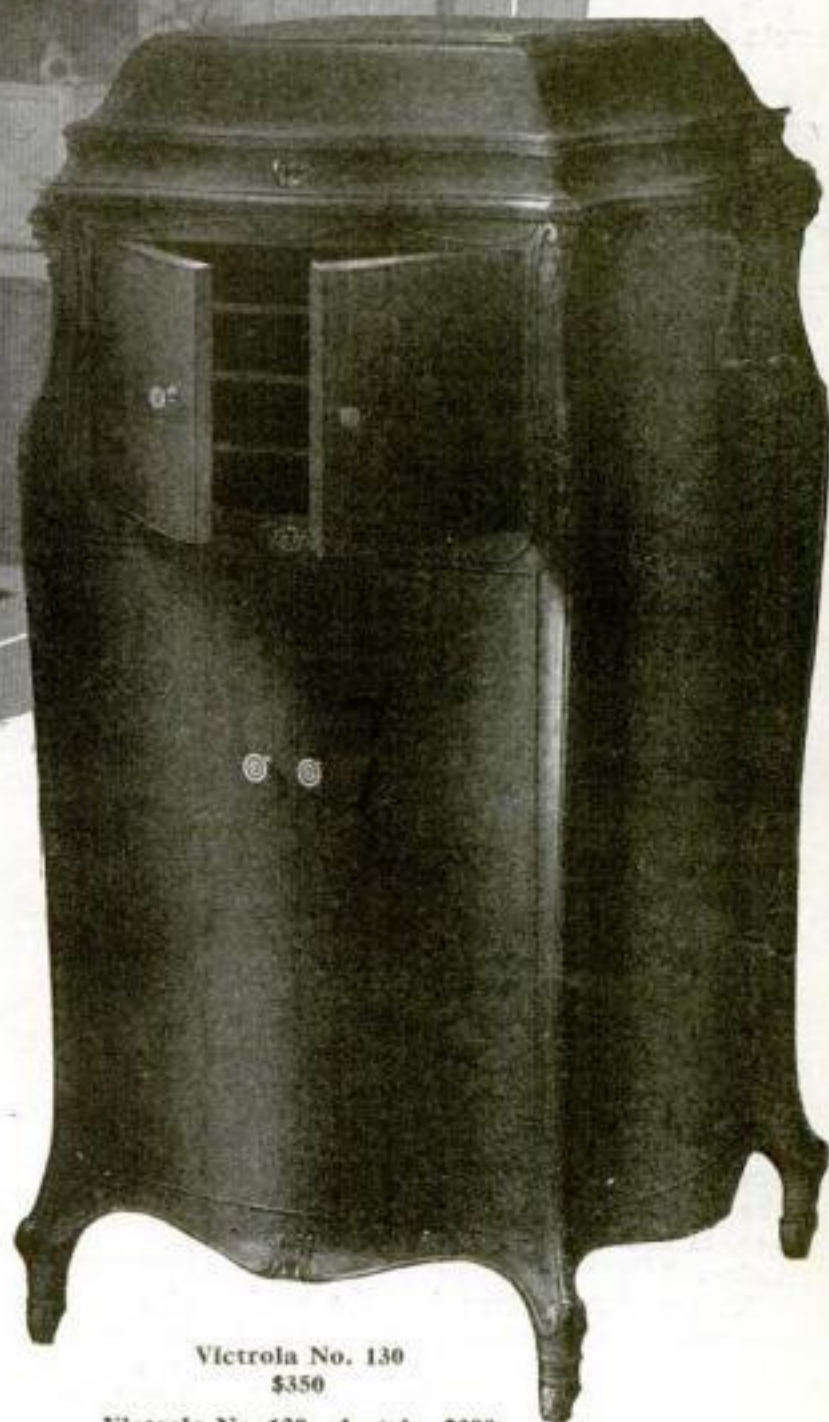

Victrola No. 130
\$350

Victrola No. 130, electric, \$390
Mahogany or oak

Other styles \$25 to \$1500



Victrola

Important: Look for these trade-marks. Under the lid. On the label.
Victor Talking Machine Company, Camden, New Jersey

POPULAR SCIENCE MONTHLY

MARCH, 1923; Vol. 102, No. 3
25 cents a Copy; \$2.50 a Year



Published in New York City at
225 West Thirty-ninth Street

In This Issue—A Great New Serial and 100 Articles, Including:

	Page		Page
<u>A Millionaire Radio Fan's Hobby</u>	24	<u>Mysterious Birthplace of Eels Discovered</u>	50
<i>By Jack Binns</i>		<u>New Low Voltage Tubes for Radio Sets</u>	53
<u>The Story of Man and His World</u>	27	<u>A Trip to the Arctic in a Flying Boat</u>	59
Beginning a fascinating new serial		<u>Science Opens Wonder Caves to Tourists</u>	60
<i>By E. E. Free</i>		<u>Will Women Athletes Win Men's Crowns?</u>	63
<u>Record Glider Revives Langley's Design</u>	33	<u>How New Chicago Post Office Keeps Mail Moving</u>	66
<u>Upside Down Exercises to Keep You Fit</u>	39	<u>Novel Inventions for the Household</u>	68
<u>Secrets of Successful Auto Driving</u>	43	<u>Do Sun Bombs Cause Storms on Earth?</u>	71
<i>By Harold F. Blanchard</i>			
<u>Suspended Railways May Bridge Cities</u>	46		
<u>The Home Workshop—page 77</u>		<u>Better Shop Methods—page 82</u>	

A Foretaste of Features in Our Next Issue


IN THE seclusion of their laboratories a small band of American scientists are laboring desperately to wrest a marvelous natural secret from the green plants around us—a secret that may help us avert a threatening world-wide fuel famine.

These men—among them being distinguished members of the American Association for the Advancement of Science—believe that today we are consuming our oil, coal, and wood at a rate that means early exhaustion of the world's supply. "And then what will happen?" they ask. Civilization would totter, they believe, unless a new source of energy could be found. To find this energy they are turning to the sunlight. For it is really only the stored-up energy of the sun that we use when we burn coal or oil. Therefore, we must find out how coal was made, and to do this we must discover how living plants use sunshine to form the material that was laid down, ages ago, in the form of the coal we mine today.

This secret of trapping the sun's energies is still locked up impenetrably in the green leaves of common plants. The fascinating story of how science is striving to learn this secret will be told in the next issue of POPULAR SCIENCE MONTHLY.

DO YOU need exercise? Of course you do; but do you know that there are three distinct classes of exercise and that your particular "exercise diet" should be prescribed by an expert just as carefully as medicine?

Dr. C. Ward Crampton,

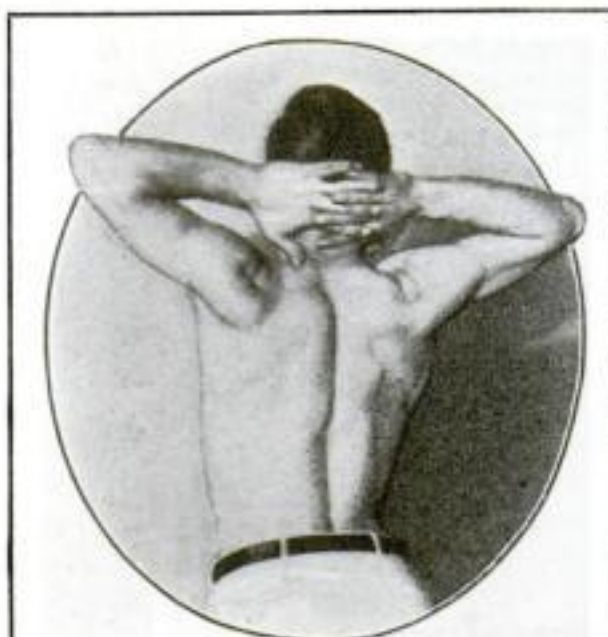

"If you can keep your neck and abdomen strong, you can safely be guaranteed a 50 per cent longer life than the average man." So writes Dr. C. Ward Crampton, noted health expert, who prescribes the above "star gazer" exercise as one of a novel series to promote longer life. See our next issue

aide to Secretary of War Weeks, in his nation-wide campaign for better American manhood, will tell in the next issue of POPULAR SCIENCE MONTHLY what your physical shortcomings are and just what

kind of exercise you should practise to remedy them. Scholar, machinist, laborer, and bank president—Doctor Crampton holds up the mirror to each and shows just what correcting recreation and exercises he requires.

A DRY cell vacuum tube radio set for \$20! Six months ago this sum would have bought you a small crystal receiving set; in the next issue of POPULAR SCIENCE MONTHLY our staff radio expert tells you how to assemble at the same cost a set that will receive from four to five times as far as the average crystal set. You would have to spend \$60 or more for an assembled set of equal efficiency.

An accompanying article describes a novel three-stage vacuum tube set, using power tube amplifiers, which was built to obtain maximum loudspeaker results.

HAROLD F. BLANCHARD, staff automobile expert, has prepared a money-saving article for the April POPULAR SCIENCE MONTHLY, telling of the simple tests every motorist can apply to his car to determine what repairs and adjustments are needed in preparation for summer driving.

DOZENS of other feature stories—informative, entertaining, money-saving—will make the next issue of POPULAR SCIENCE MONTHLY the most interesting publication of the month.

On newsstands everywhere March ninth

POPULAR SCIENCE MONTHLY

Issued monthly. Single copy, 25 cents. Yearly subscription to United States, its possessions, and Canada, \$2.50; foreign countries, \$3.

Entered as second-class matter Dec. 28, 1918, at the Post Office at New York under the act of March 3, 1879. Entered as second-class matter at the Post Office Department, Canada. Printed in U. S. A.

Copyright, 1923, by the Modern Publishing Co.

The contents of this magazine must not be reprinted without permission.
H. J. Fisher, President; R. C. Wilson, Vice-President
O. B. Capen, Secretary and Treasurer

From the Great White Way to the Great White Spaces

Get away from the grind of your daily routine. James Oliver Curwood is waiting to take you, while you sit in your easy chair, to the magic outdoors of the great Northwest, where interesting adventures make your blood run fast.



This great author knows the animals of the wilderness more intimately than any other writer. His absorbing tales of their adventurous life are laid in the range of country where no hunters go.

Pack up your troubles and follow CURWOOD into Adventureland

COME to the great magic land of the Northwest—come where the breath of Romance stirs in the blood of men and women—come to the land of adventure, strange, enchanting, wondrous. Stand under the great open sky—gaze at the wondrous Red Moon and the North Star—hear the cry of the wolf pack—thrill to the magic of the forests—sit by the soft glow of the camp-fire—come to the top of the world and feel the spell of the vast white

wilderness! You do not have to stir out of your easy chair to do it.

James Oliver Curwood takes you to the North Country, where splendid adventures are always happening—where romance steadily spins her golden web of enchantment. Here is great drama, played by great and fearless men who quicken your red blood and lift you clear of care and worry, carrying you far and happily into Adventureland!

6 Complete Novels—James Oliver Curwood Now at a Special Price

"The Hunted Woman," "Baree, Son of Kazan," "God's Country and the Woman,"
"The Grizzly King," "The Courage of Marge O'Doone," "Nomads of the North."

There never was a writer with the compelling power of James Oliver Curwood. His books have that gripping, broad interest of big things done in a big way. Whether you read about "Baree, Son of Kazan," the story of the little outcast wolf-dog, or about "The Hunted Woman," the appeal fairly takes you by the heart. You find yourself gripped by this great writer's power. As no man has done before, he brings to you the atmosphere of the North, the appeal and mystery of

the wilderness, the scent of crisp air, the overpowering sensation of great, untrammeled spaces.

Here are the humor and tragedy, the grief and gladness of a great and glorious country. More than 2,000,000 copies of these books have been sold. The tales have been eagerly sought by moving picture companies.

And now you have the opportunity of obtaining a beautiful six-volume set of

James Oliver Curwood at an unprecedented price! At last this world-famous author is brought within the reach of everybody. By acting quickly—that is the condition, remember—you can obtain a wonderful six-volume set of James Oliver Curwood for practically half price! The set, which is beautifully bound in dark maroon cloth, with the titles lettered in gold, has sold regularly for almost DOUBLE the present price!



James Oliver Curwood used to sleep with a young grizzly bear, and as a result of this close study his novel "The Grizzly King" is one of the most entrancing and realistic animal stories ever written

Send No Money

feet, if you want to live among real men and real women, follow Curwood into adventureland. Don't bother to send any money. Merely mail the coupon and the six volumes of Curwood will be sent to you at once.

You have the privilege of examining them for seven days, and then paying for them in small monthly installments. This offer is good only while the present special edition is available. Take advantage of it now—mail the coupon at once and make sure of your set.

Nelson Doubleday, Inc.
Dept. C-363
Garden City
N. Y.

Nelson
Doubleday, Inc.
Dept. C-363
Garden City, N. Y.

Kindly send me the six-volume beautifully bound set of James Oliver Curwood at the special low price, for free examination. I will either return the books at your expense in 7 days or send you \$1.50 and then \$2.00 a month for three months, making a total of only \$7.50.

Name.....


Address.....

City..... State.....

By sending cash with your order you can secure this set for only \$7.00.



Read the World's Most Amazing Story

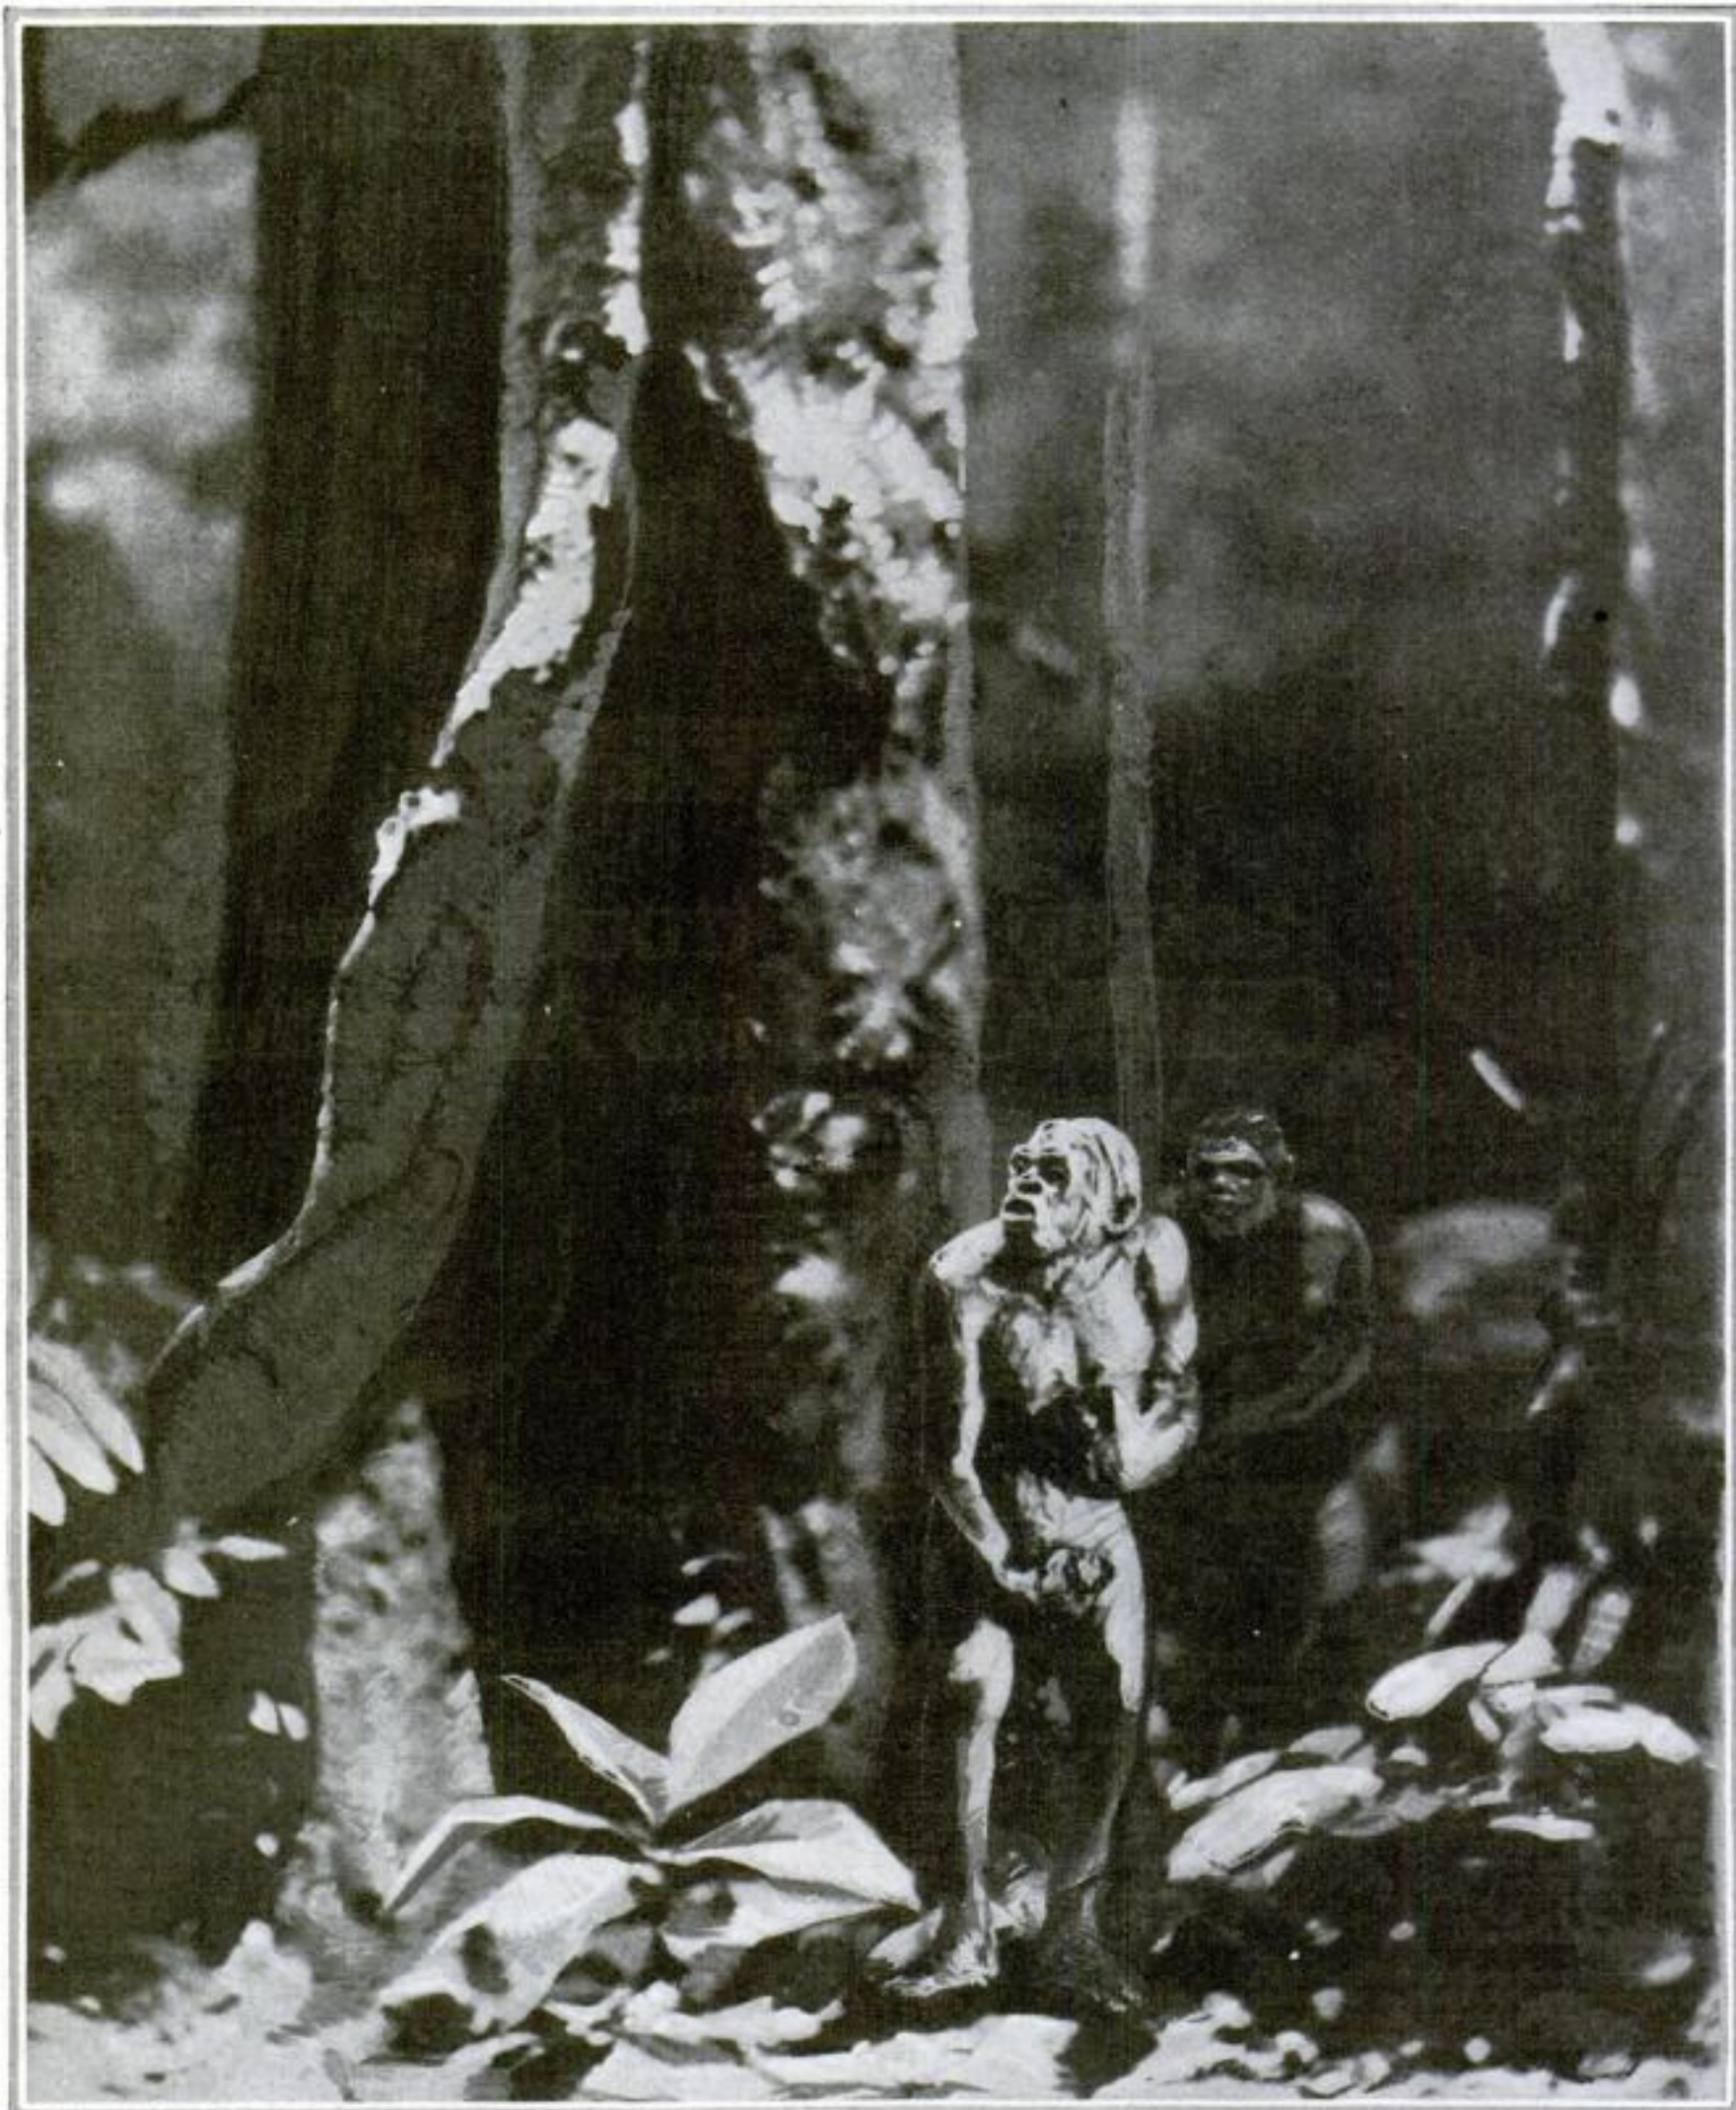

From model by Dwight Franklin

THIS slinking, fear-ridden, half-human creature, emerging from the black night of time toward the dawn of civilization, was your first ancestor—the ape-man, whose story you will read in coming issues of **POPULAR SCIENCE MONTHLY**.

Millions of years ago he skulked through the forests of what we now call Asia. He dwelt always in a black fog of fear. He was in terror of the savage beasts around him, of the hail and lightning and thunder; of

the cold and darkness. He was dwarfed by all the menacing powers of nature. He was only a trembling experiment. He might have been utterly stamped out—and with him would have vanished the promise of our human race to come. But two things saved him: He had hands with which to clutch stones as weapons, and within his savage skull there was the glimmer of a mind.

How this creature developed a real brain and a human form; how he learned to in-

vent tools, to hunt in bands, to kindle fires and build a hut, to tame wild animals and plant grain—these great discoveries of science are told in the most fascinating serial ever published.

It is "The Story of Man and His World," by Dr. E. E. Free, beginning in this issue of **POPULAR SCIENCE MONTHLY**, to run throughout the year. It will show you a breathless panorama of man's conquest of nature, and of the great fundamentals of science that everybody wants to know.

You owe it to yourself not to miss a single instalment



NOW FREE!

The Book That Has Shown Thousands the Way to Amazing Salary Increases

Do you want to leave the rut of routine work for a position that will grow daily in its fascination? Do you want to start right out making more money than you ever thought possible? We have done exactly this for thousands of men. Here is the book which gave them their start. Read how it is now offered to you—FREE!

TAKE this situation. A man who had worked all his life in a routine job at low pay suddenly surprises his friends by moving into a better neighborhood, taking a big house, buying a car and blossoming out as a well-to-do and influential citizen in his new community. How did he do it? What is the secret that he used? Simple enough. He knew that the biggest money in business is in Selling and though he felt that he couldn't sell a thing, he learned the secrets that make Master Salesmen and then began to make big money.

If only one man had found inspiration enough in this remarkable book to make a brilliant success in the Selling field—in a job paying him many times his former salary—then you might call it luck. But thousands have done it.

Your One Chance to Make the Biggest Money of Your Life

Not one of the men whose names appear below had ever sold a thing before—not a dime's worth. If you had told one of them that he could sell he would have laughed at you.

Probably he would have come back with the old saw, "Salesmen are born, not

made." They were frankly skeptical. Yet every one of these men, through reading this book, discovered the fallacy of this vicious old idea that Salesmen are "born." They learned that *Master Salesmen are made!* And in this book they found a comparatively easy way to go from low pay to better earnings.

Simple as A B C

Sounds remarkable, doesn't it. Yet there is nothing remarkable about it. There are certain ways to approach different types of prospects to get their undivided attention—certain ways to stimulate keen interest—certain ways to overcome objections, batter down prejudices, outwit competition and make the prospect act. If you will learn these principles there is awaiting you a brilliant success and more money than you ever thought of earning. This book, "Modern Salesmanship" tells exactly how the National Salesmen's Training Association will make you a Master Salesman.

As soon as you are qualified and ready the Employment Service of the National Salesmen's Training Association will help you to select and secure a selling position as city or traveling salesman. Many of the biggest, most reputable selling organizations in America turn to this Association for their Star Salesmen.

Now Free to Every Man Who Will Act at Once

We are not making any extravagant claims about what we will do for you. We don't

have to. The records of the real successes for which we are responsible are so overwhelmingly a testimonial of the fact that any man of average intelligence can become a Master Salesman that we are willing to leave the decision entirely up to you. All of this proof and many important features about Salesmanship are contained in our salary raising book, "Modern Salesmanship." It is yours—FREE. Send the coupon for it today. It will show you how you can quickly become a Master Salesman—a big money maker. It will tell you about the National Salesmen's Training Association system of Salesmanship training that has meant prosperity to so many thousands of men—about the National Demonstration method that gives you actual experience while studying—and all about the fine opportunities that await you in the selling field. If you do not send this coupon we will lose merely the opportunity to train one more Master Salesman. But for you, failure to act may mean that you lose the one big chance of your life to leave forever behind you the low pay of a routine job. It may mean the difference between this and a real success at a big salary. Is it worth 2c to find out? Then mail this coupon NOW.

National Salesmen's Training Association
Dept. 15-C
Chicago, Illinois

National Salesmen's Training Association
Dept. 15-C, Chicago, Ill.

I simply want to see the facts. Send me FREE your Book "Modern Salesmanship" and Proof that I can become a Master Salesman. Also tell how you can help me to a position and send list of lines with openings for Salesmen.

Name.....

Address.....

City..... State.....

Age..... Occupation.....

Read!

Charles Berry of Winterset, Iowa, stepped from \$18 a week as a clerk to a position making him \$1,000 the very first month. J. P. Overstreet of Dennison, Texas, read this book, left a job on the Capitol Police Force at a salary of less than \$1,000 a year and in six weeks earned \$1,800. F. Wynn, Portland, Ore., an ex-service man, earned \$554.37 in one week. Geo. W. Kearns of Oklahoma City found in this book a way to jump his earnings from \$60 a month to \$524.00 in two weeks and C. W. Campbell learned from it how he could quit a clerking job on the railroad to earn \$1,632 in thirty days.



Money Making Opportunities for "Popular Science" Readers

\$25.00 in PRIZES

To win one of these cash prizes is easy, and every reader is invited to enter this fascinating competition. Just write a letter of not over seventy words answering this question:—

What advertisement of "Money Making Opportunities" in this issue interests you most and why?

Here are the prizes we will pay for the ten best letters answering the above question:—

First Prize \$10.00
Second Prize 5.00
Third Prize 3.00
And 7 Prizes
of \$1.00 each 7.00

First read every one of the "Money Making Opportunity" advertisements on pages 6 to 19. Check the ones that interest you. Then read over the ones you have checked and decide on the one that interests you most.

Then write a short letter, not more than seventy words, telling us why the advertisement you pick interests you most. Remember that ten prizes will be awarded. You have a good chance of winning one of them. Be sure to mail us your answer before March 1st. The prizes will be awarded, in the order of their merit, for the letters that are most interesting and best expressed.

The names of all the prize winners and the letters that win the first two prizes will be printed in this column in the May Issue. Address your prize letter to—

Contest Editor

POPULAR SCIENCE MONTHLY
225 West 39th Street, New York City

Rate 25 Cents a Word. Advertisements intended for the May issue should be received by March 5th

MANUFACTURING

WE manufacture anything, design and build special machinery, develop inventions, build models, make drawings of every description, our facilities the best. Write for booklet. R. G. Clyne Engineering Co., St. Louis, Missouri.

TOOLS, dies and general mfg. Models and new inventions our specialty. Logan Machine Co., 222 S. Clinton Street, Chicago.

ADDING MACHINES

FREE trial, marvelous new adding machine. Adds, subtracts, multiplies, divides, automatically. Work equals \$350.00 machine. Price only \$15.00. Speedy, durable, handsome. Five-year guarantee. Used by largest corporations. Write today for catalog and free trial offer. Lightning Calculator Co., Dept. O, Grand Rapids, Mich.

MAILING LISTS

GUARANTEED mailing lists of Ashland and Ashland County, Ohio. Also six other Ohio counties. Prices low. Immediate delivery. G. T. Shearer, Box 454, Ashland, Ohio.

MOTORS, ENGINES, MACHINERY

PULLEYS, grooved and motor. Reducing gears. Light transmission machinery. Send for catalog. Winfield H. Smith, Lock Street, Buffalo, New York.

FORMULAS

FREE—Formula catalog. Laboratories, 4600 Boylston Building, Chicago.

3,500 FORMULAS, recipes, trade secrets. 424 pages, \$1.00. Hillside Laboratories, 7021 D South Winchester, Chicago.

FORMULA catalog free. C. A. Lutz, Apartment 241, York, Pennsylvania.

INK Eradicator (original) and other valuable formulas. Utility Service, P. O. Box 32, Hull, Quebec, Canada.

FORMULAS of the better sort. Write for our free catalog. National Scientific Laboratories, 213 North Monroe, Richmond, Virginia.

FORMULAS—All kinds. Catalogue free. Bestoval Laboratories, 4047-PQ North Whipple, Chicago.

MOTORCYCLES, BICYCLES, SUPPLIES

DON'T buy a bicycle motor attachment until you get our catalogue and prices. Shaw Mfg. Co., Dept. 4, Galesburg, Kansas.

RADIO SUPPLIES

RADIO and electrical supplies. Send for free monthly bulletin of bargains. Holmes Electric Co., Libertyville, Illinois.

HAVE you seen it? My unusual, fully illustrated radio catalog is completed. Only a dime. N. E. Ristey, Spring Grove, Minnesota.

A VACUUM tube hospital. We repair vacuum tubes and guarantee them to work. Dealers, agents wanted. George P. Porell Co., Inc., Dept. P. S., West Somerville, Mass.

AMERICAN MADE TOYS

MANUFACTURERS on large scale, also homeworkers, wanted to manufacture metal toys and novelties. Millions needed of barking dogs, wag tail pups, wild animals, automobiles, Indians, cow-boys, baseball players, cannons, toy soldiers, crowing roosters, statues of Liberty, miniature castings of capital, bathing girl souvenirs and others. Unlimited possibilities. Guaranteed casting forms furnished manufacturers at cost price from \$5.00 up, with complete outfit. No experience or tools necessary. Thousands made complete per hour. We buy goods all year and pay high prices for finished goods. Cash on delivery. Contract orders placed with manufacturers. Catalog and information free. Correspondence invited only if you mean business. Metal Cast Products Co., 1696 Boston Road, New York.

AVIATION

LEARN to fly, complete course, \$200. Position for competent graduates. Ardie Miller, Benton, Illinois.

PROPELLERS for aeroplane propulsion, 5-foot diameters, \$12; 6-foot for Ford, \$15; others in proportion. Motorcycle sleigh blueprints, 75c, Ford size, \$1.00. Pictures free. Crawford Motor and Aeroplane, Long Beach, Calif.

BOYS build model aeroplane at small cost. Write for circulars. Aero Shop, 3050 Huribut Ave., Detroit, Michigan.

INVENTORS desiring information write for our free Illustrated Guide Book and Evidence of Conception Blank. Send model or sketch of invention for our opinion of its patentable nature. Highest references. Prompt service. Reasonable terms. Victor J. Evans & Company, 151 Ninth, Washington, D. C.

FOR BOYS

MOUTH-ORGAN Instructor, 25c. Play in one hour. Boxing instructor, 25c. Minstrel Show Guide, 10c. Elbea, Publisher, Bowling Green, Ohio.

INSECTS WANTED

WHY not spend Spring, Summer and Fall gathering butterflies, insects? I buy hundreds of kinds for collections. Some worth \$1 to \$7 each. Simple outdoor work with my instructions, pictures, price list. Get posted now. Send 10c (Not Stamps) for my Illustrated Prospectus. Mr. Sinclair, Dealer in Insects, Dept. 7, Ocean Park, Calif.

AUTOMOBILES AND ACCESSORIES

PATENTS—Write for free Illustrated Guide Book and Evidence of Conception Blank. Send model or sketch and description of invention for our opinion of its patentable nature. Highest reference. Reasonable terms. Victor J. Evans & Company, 189 Ninth, Washington, D. C.

BARGAINS—Radiators—Sport Bodies at bargain prices. State make and model required. Wabash Radiator Co., 1117 Wabash Ave., St. Louis, Mo.

AUTOMOBILISTS. A pair of "Is-It-Lit" reflectors attached to your headlights will tell you when driving whether they are lighted. Two styles \$1.05 and \$1.58 the pair. The H. D. S. Co., 79 Walnut St., Somerville, Mass.

AUTOMOBILE owners, garagemen, mechanics, send today for free copy of America's most popular motor magazine. Contains helpful articles on overhauling, repairing, ignition, carburetors, batteries, etc. Automobile Digest, 523 Butler Bldg., Cincinnati.

OUR Intensifiers help any motor. Order for three days free trial—then remit 25 cents each or return. Western Ignition Co., Dept. B, St. Louis, Missouri.

FORD ACCESSORIES

SPEEDSTER fans—see "Red-i-Kut" ad page 122.

CYCLO "Dynamic" provides remarkable solution of hot-spot problem. Cylo Manifold Co., Chestnut St., Akron, Ohio.

BRIGHT light and dimmer for magneto lighted Fords. Guarantee. Sample \$2.50. Sunlight, Box 304, Chicago, Ill.

FORD owners, don't ruin your car by leaving it chatter. Correct same by installing Bredar's Ball Shim. Price \$1.10. Ask your dealer or write for information. Nic Bredar's Son Mfg. Co., Rock Island, Illinois.

ELECTRICAL

BLUEPRINTS. Electrical connecting diagrams. Particulars free. Samples, 20c. Charles Chittenden, 83024 Matthews, Kansas City, Missouri.

MR. ADVERTISER: Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Manager Classified Advertising, Popular Science Monthly, 225 West 39th Street, New York.

WANTED

DETECTIVES—Excellent opportunity. Fascinating work. Experience unnecessary. Particulars free. Write American Detective System, 1968 Broadway, New York.

CASH for old gold, platinum, silver, diamonds, Liberty Bonds, war, thrift, unused postage stamps, false teeth, Magneto points, jobs, any valuables. Mail in today. Cash sent, return mail. Goods returned in ten days if you're not satisfied. Ohio Smelting Co., 309 Hippodrome Bldg., Cleveland, Ohio.

WANTED—Representatives in every factory in the United States. Popular Science Monthly, 225 West 39th Street, New York.

BE a detective. Excellent opportunity, good pay, travel. Write C. T. Ludwig, 424 Westover Bldg., Kansas City, Missouri.

DUPLICATING DEVICES

"MODERN" Duplicators save Time, Labor and Money. Gets Business. Reproduces Typewritten or Panned Letters, Drawings, Lessons, Music, Menus, Bids, Notices, Specifications, Maps or anything in one or more colors. Prints TWO per minute. Special sale on. 30 Days Free Trial. \$2.25 up. Booklet free. J. V. Durkin-Reeves Co., Pittsburgh, Pennsylvania.

TRADE SCHOOLS

EARN more money—Learn sign painting, scenic painting, showcard writing, auto painting, paper hanging, decorating, graining, marbling, at Chicago or at your home. Chicago Painting School, 157 West Austin Avenue, Chicago.

LABORATORY AND CHEMICAL

STOP, look, listen: Your chemical or electrical problem solved complete, Five Dollars. Write me. W. Stedman Richards, Consulting Chemist, Box 2402, Boston, Massachusetts.

EXPERIMENTERS. Complete supplies for the chemical laboratory. Catalogue 5c. National Scientific Supply Co., 241 Pennsylvania Avenue, Washington, D. C.

CHEMICAL analysis. Chemical and Industrial Formulas. Burson Chemical Laboratory, Ottumwa, Iowa.

PHYSICIANS and Surgeons Diagnostic Laboratories of Philadelphia, 1633 Locust Street. Urine, blood, sputum, Wasserman's test and all examinations of the body fluids made. Send for containers and literature. Water for analyses—well water, drinking water and chemical formulas, dyes, drugs and patents. Dr. J. M. Rosenthal, Am., M.D., Ph. D., F. C. S., Director of Laboratories.

TELEGRAPHY

WANTED—Young men and women to learn Morse and Wireless Telegraphy. Railroads and Wireless Companies in great need of operators. We teach you quickly, and procure positions at big salaries. Great opportunities for advancement. All expenses low; can earn part. Write today for free catalog. School established 1874. Dodge's Telegraph Institute, Queen Street, Valparaiso, Indiana.

CONSULTING ENGINEERS

SCIENTIFIC Designs and Working Models of valuable inventions prepared and guaranteed. Consulting Engineer, 2 East 23d Street, Room 714, New York.

INDEX

CLASSIFICATION	PAGE
Adding Machines.....	6
Advertising.....	8
Advertising Novelties.....	8
Agents and Salesmen Wanted.....	14
American Made Toys.....	6
Authors-Manuscripts.....	10
Automobiles and Accessories.....	6
Aviation.....	6
Books and Periodicals.....	10
Business Opportunities.....	19
Chalk Talks.....	10
Consulting Engineers.....	6
District Managers Wanted.....	12
Dogs.....	8
Duplicating Devices.....	6
Educational and Instruction.....	8
Electrical.....	6
For Boys.....	6
For Inventors.....	10
For Men and Women.....	10
For the Home.....	8
Ford Accessories.....	6
Formulas.....	6
Help Wanted.....	18
Horoscopes.....	8
Inventions for Sale.....	8
Insects Wanted.....	6
Laboratory and Chemical Services.....	6
Languages.....	8
Mailing Lists.....	6
Manufacturing.....	6
Miscellaneous.....	8
Models and Model Supplies.....	8
Motion Picture Business.....	10
Motorcycles, Bicycles, Supplies.....	6
Motors, Engines, Machinery.....	6
Music and Sheet Music.....	19
Office Devices.....	8
Optical Goods.....	10
Patent Attorneys.....	12
Patents for Sale.....	8
Patents Wanted.....	12
Photography and Supplies.....	10
Plays and Entertainments.....	8
Poultry and Live Stock.....	8
Printing, Engraving, Multigraphing.....	8
Radio Supplies.....	6
Real Estate—Farm Lands.....	8
Scenery for Hire.....	8
Stamps and Coins.....	19
Telegaphy.....	6
Trade Schools.....	6
Typewriters and Supplies.....	8
Wanted.....	6
Work Wanted.....	18

EVERY LIVING PERSON

Can Be Helped By Coué's Book

Skeptics have turned ardent believers in Coué's method of autosuggestion; scientists and thinkers all over the world have endorsed it; millions of people, including the most prominent, are practicing it. Amazement, gratitude and joy follow its use everywhere, as humanity rids itself of disease and all manner of ills, without the use of medicines, diet, exercise or ordinary healing systems. ANYBODY can use this simple method without effort or inconvenience by following the simple instructions given in this book.



EMILE COUÉ stands out today as the man who has discovered just what to do to put in operation the great forces in our subconscious mind to help us achieve whatever we desire.

The subconscious mind controls the automatic functions of the body, such as breathing, digestion, muscular and nervous reactions, etc. It is the central power station from which come impulses that determine bodily health and strength or illness. The subconscious mind, however, is held in subjection by the conscious mind which thinks, reasons and deals with ordinary material things. Coué teaches us how to implant in the subconscious, the convictions of health and success. He found that the imagination, not the will, can generate the latent forces which accomplish almost unbelievable things. The thing that makes his methods notable is that he takes from the complexities of science fundamental facts, and presents them so simply and clearly that anybody can understand and apply with ease the methods which put the subconscious mind to work.

Countless numbers of people go through life little dreaming that they have stored up in the subconscious the very treasures for which they long. Coué's book gives mankind the key to this inner storehouse, and it is small wonder that so many are availing themselves of the wonderful opportunity to mould their lives with tenfold advantage to themselves.

Orison Swett Marden, writing in the Success Magazine, says: "When all men know how to make the subconscious work for them there will be no poor people, none in distress and suffering, in pain or in ill health; no one will be unhappy, no one will be a victim of thwarted ambitions."

Thousands are proving the truth in this statement by using Coué's remarkable methods. You can do for yourself what these others have done by following the simple instruction in Coué's own book.

SELF MASTERY Through Conscious AUTOSUGGESTION

This Book not only contains a complete exposition of his theories and methods with thorough instructions for self cure, but also gives in detail some of his amazing cures which he has achieved for many people.

Write for free particulars of agents' proposition.

"Day by day, in every way, I am getting better and better."

"Words cannot explain my happiness and joy. The doctors have been wanting to operate on me for nine years for a growth in the neck of my bladder . . . after receiving Emile Coué's book and applying his method, all the inflammation is gone and the growth is also going away. I was having serious trouble with my eyes, which has also almost gone."

Mrs. A. B. C., Quincy, Ill.

"For years I had a spinal curvature and I had given up hope of a cure, two or three bones being misplaced, making a hollow in the back. I hardly know how to explain it. I am very thankful to Dr. Coué to find that my spine is straightening and the hollow has filled out."

Mrs. F. C. D., Poplar Hill, Md.

"I have had an almost complete healing from a chest pain that for years has given me the most terrible suffering—almost a death agony—whenever I would go up steps or walk hurriedly. I began to use the mental suggestion of the great scientist, Dr. Coué, as soon as your book came to me."

Mrs. C. H. W., Mansfield, O.

"Emile Coué's method is the most effective of any I have tried. In its simplicity it works wonders. I cannot begin to express the torture of my body and mind which I suffered. Now, I am happy to say I am well and at peace."

Mrs. J. D. T., Charleston, W. Va.

"For more than twenty years I have been a drunkard of the very worst type. Every few months without any definite cause, I would go on a 'spree' for anywhere from ten days to two weeks, always ending in the delirium tremens. Today all that is passed forever. The words of Dr. Coué have brought about the change for I believe in him and today I also believe in myself. The one dollar I invested in his book has returned greater dividends than any one million dollars invested in Wall Street."

Mr. J. S., New York City.

"The benefits I have derived from this book have simply been marvellous. Before reading Dr. Coué's book, I was constantly brooding and very melancholy. Now everything again seems bright and I am enjoying life as I haven't before in thirty years."

Mr. H. G. S., Oconomowoc, Wis.

"Emile Coué's book is a godsend to suffering humanity, especially for nervous people. I have cured myself of worry and hurry and nerves of all kinds, until today, thanks to God and M. Coué, I am a well and happy woman."

Mrs. C. A. B., Marshall, Tex.

"Self Mastery" has been a perfect wonder in awakening the people of this vicinity. One woman who was due for an operation for goitre, after reading the book and putting its teachings into practice, was sent home by the doctor who said she needed no operation. This saved her much suffering and probably a big doctor's bill. She blesses the Miracle Man of France."

Mrs. M. F. W., Bloomington, Wisc.

"I have been using Dr. Coué's formula since August for sciatica and a painful knee, and am feeling much better. A friend tells me she taught her little boy to use it to correct a weakness of the bladder; she is entirely relieved."

S. J. W., Birmingham, Ala.

"Since reading 'Self Mastery' I have followed M. Coué's directions with marvellous results. Nervousness, sick headache, paralysis, deafness, neuritis, ulcer, kidney, stomach and bladder trouble have yielded to the treatment. Every case reporting decided improvement after second or third treatment. One case of paralysis unable to reach a chair in my office, without assistance, the day following first interview, walked two and a half miles—a few months later was taking physical exercises to reduce—another, bed-ridden for four years, left her bed the second day and one month later was doing housework for family of four. A syphilitic case reported a perfect cure and a gain of twenty pounds at the end of three months, having had but ten days' treatment. All conditions treated have been of from four to thirty years duration."

L. L. T., New York City.

Read These Remarkable Testimonials



The above letters will convince you

If sick, nervous or ailing in any way, you may be cured with amazing quickness and without effort, through Coué's method. If mentally depressed, discouraged or unsuccessful, you can rebuild yourself according to your requirements with astonishing results. Even if you are perfectly healthy and successful, you can add greatly to your reserve power and fortify and broaden your life by the methods explained in this book.

Remember that Coué's presence—his own personality—is not necessary to effect remarkable cures. This book gives you his instruction the same as he would by word of mouth. You cure yourself by following his instructions. That is why this book has met with unusual popularity. People who have never seen Coué have obtained almost miraculous results, as shown by the letters printed on this page.

It is now known universally that Coué cured Lord Curzon, Foreign Minister of Great Britain and Countess Beatty, well known English hostess, of serious illnesses and that both made public acknowledgment of their cures, giving Coué full credit.

The importance of Coué's ideas are recognized by some of the most influential people in America.

Dr. George Walker, one of Baltimore's distinguished specialists said recently: "The success of Coué's methods, emphasizing the importance of the mind over the body, has been so remarkable that it could not escape bringing home to the medical profession the realization that perhaps it had been overlooking certain essential considerations."

Luther Burbank, the famous botanist, has written the following tribute, which is impressive: "Emile Coué merits our joyous admiration, universal love and immortal thanks for his wonderful emancipation proclamation contained in his book."

Dr. Frank Crane, whose famous editorials reach millions of people daily and who is one of the most important forces of public opinion, said recently: "Emile Coué helps people to get well by Autosuggestion."

Henry Ford, the hard-headed apostle of common sense, said in a recent interview: "I have read Coué's philosophy; he has the right idea."

Chauncey M. Depew says: "There is truth in the Coué gospel."

Sarah Bernhardt has been reported cured, at the age of 67, of an attack of syncope, usually fatal, through Coué's methods.

Wallace Reid, star of the screen, reported dying, is "coming back" by following Dr. Coué's autosuggestion. —Chicago American.

Mary Johnston, the famous writer, said: "Coué's method is excellent. I have known it to accomplish wonders."

Billie Burke, the popular screen star, said: "Coué is accomplishing wonderful things. He gives people self confidence."

Canon Asa Appleton Abbott of the Trinity Cathedral, Cleveland, studied Coué's methods at Nancy and is thoroughly imbued with his philosophy. Canon Abbott says: "Coué taught me self confidence and at this age (55) in life I have learned the lesson of Self Mastery."

Just \$1.00 (no other payment) will bring you this book giving complete information how to use Coué's methods. Whether you are sick or not you can benefit by this information as it will contribute in many ways to making your life richer and happier.

Send for this book TODAY! Mail the coupon below

AMERICAN LIBRARY SERVICE

500 Fifth Ave. Dept. 38-C New York City

You may send me Coué's Method, "Self Mastery Through Conscious Autosuggestion," postpaid, I enclose \$1.00 in full payment. (Add 10c to domestic checks and 15c to foreign checks.)

Name.....

Address.....

City..... State.....

☐ (Check here if you wish genuine leather, gold stamped and photographically illustrated for which send \$1.75.)

Copy this Sketch!



I AM anxious to find men with a desire to become draftsmen. With business picking up everywhere many thousands of draftsmen will be needed at salaries up to \$3000 to \$3600 per year.

In asking you to copy this sketch I believe I will be able to tell from the sketch you send in what kind of an opportunity you will have in this great profession.

There are no conditions requiring you to buy anything. You are under no obligations in sending in your sketch.

FREE!

\$80 Drafting Course

To every student enrolling now I give an opportunity of getting an \$80 drafting course absolutely without cost to him. So send in your sketch today and learn all about this offer.

For Sending Copy of Drawing




Draftsman Pocket Rule FREE

To every person of 16 years or older sending a sketch I am going to mail free and prepaid the Draftsman's Ivory Pocket Rule shown here. This will come to you entirely with my compliments. With it I will send you a 6 x 9 book on "Successful Draftsmanship."

Salaries up to \$250 and \$300 a Month

Position paying up to \$250 and \$300 per month, which ought to be filled by skilled draftsmen are vacant everywhere. There are in every part of this country ambitious men, who with practical training and personal assistance, will be qualified to fill these positions. Mr. Dobe guarantees to train you UNTIL placed in a permanent position at a salary up to \$250 and \$300 per month.

FREE \$25 DRAFTING OUTFIT

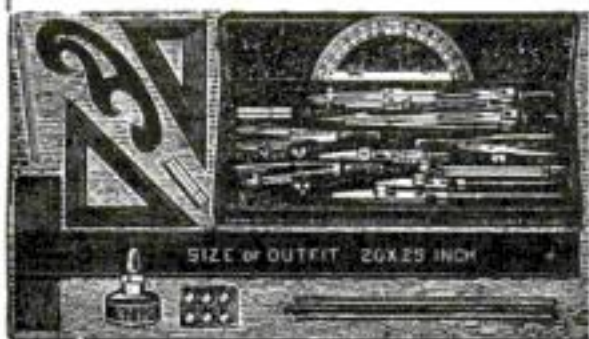

Mr. Dobe will give you this entire outfit free if you enroll at once. Don't delay. Send for full information TODAY!

Mail Your Drawing At Once—

and Get Ivory Pocket Ruler Absolutely Free! Ambitious men, interested in drafting, hurry! Don't wait! Send in your sketch or request for FREE Book and Ivory Pocket Ruler Address:

Chief Draftsman
Engineers Equipment Co.
1951 Lawrence Ave., Div. 1363, Chicago, Ill.

Money Making Opportunities

FOR THE HOME

GRANDFATHER clock works, \$5.00. Build your own case, instructions free; make good profits selling your friends. Clock works with chimes for old or new cases. Write for full particulars. Clock Co., Nicetown, Pennsylvania.

IT'S time to build a curiosity clock for your home. Instructions quarter. H. & M. Specialty Co., Box 66, Brighton, Massachusetts.

MODELS AND MODEL SUPPLIES

WE make working models for inventors and experimental work, and carry a complete stock of brass gears and model supplies. Send for catalogue. The Pierce Model Works, Tinley Park, Illinois.

MODEL making and experimental work; modern shop, expert workmen. Manufacturing. Lamson Model and Experimental Works, 625 W. Jackson, Chicago.

PRACTICAL model steam engines, boilers, blowlamps, pumps. Send 10c in stamps for a new catalogue. Model Machine Shop Co., 417 East 71st Street, New York City.

HOROSCOPES

YOUR horoscope covering full year 50c. Includes an extensive reading, valuable daily guide, large pictorial chart, and special forecasts for each month. Scientific, complete. Try it! Money back if dissatisfied. Give birthdate. Address L. Daniels, Flatbush Station, Box 32, Brooklyn, New York.

HOROSCOPE showing talents, suitable occupation, affinity, etc. Send 10c, birthdate. St. Germain Society, Sharpsburg, Pennsylvania.

YOUR horoscope, business, changes, social, matrimonial prospects. Send birthdate and 10 cents (stamps) for remarkable test reading. Zanya, 20 2-O West 105th Street, New York.

OFFICE DEVICES

ADDRESSING machines, multigraphs, duplicators, folders, check writers, sealers, dictating machines, at about half new cost. Pruitt, 170-Z North Wells, Chicago.

MISCELLANEOUS

STOLEN auto, make this device yourself at home in few minutes, attach to auto and prevent thief. Drawings and instructions for making \$1.00. Tangle Supply Company, Muscatine, Iowa.

ALL wool knitting yarn for sale from manufacturer at 95c, \$1.35, \$1.60 per lb. Free samples. H. A. Bartlett, Harmony, Maine.

MAKE interesting new friends through jolly letters. Send stamp. Betty Lee, Inc., 4254 Broadway, New York City.

FAMOUS select Chesapeake oysters fresh from the shell direct to consumer. Lowest possible price. Prepaid parcel post. Write Wm. Lord, Cambridge, Maryland.

SCENERY FOR HIRE

SETTINGS for opera, plays, minstrels. Plush drops. Address Amelia Grain, Philadelphia.

ADVERTISING

ADVERTISING rates for magazines and weeklies free. Charles A. Lutz, Apartment 241, York, Pennsylvania.

ADVERTISE in 24 metropolitan dailies, 25 words, \$15. Helpful Guide listing 1000 publications, 4c stamps. Wade, Baltimore Bldg., Chicago.

INCH Display advertisement, 161 magazines, three, \$15.00. Wood's Popular Service, Atlantic City.

PASCHALL'S pictures—cuts—make advertising pay! Starner Building, Marion, Ohio.

ADVERTISER—Your ad in 100 magazines for 4c per word. Sample copy, 10c. Harley Snell, 1021 State Avenue, Cincinnati, Ohio.

KEEN producers are my pictorial sales letters, and business. Moores' Advertising Service, Canaan, New Hampshire.

28 WORDS in 60 country town newspapers, \$3. Crawford, 334 Baker, Syracuse, New York.

ADVERTISING art, copy, engravings, written, designed and executed for big results. Martin-Guild Service, Kalamazoo, Michigan.

ADVERTISING NOVELTIES

GOLD lettered Advertising-Pencils for you. Buy direct; save entire middleman's profit. Samples free (no agents). Address S. Musial & Co., 425 Walnut Street, Yonkers, New York.

PATENTS FOR SALE

BUY this patent for new type of laundry ink and make quick money. Patented process revolutionizes this product. Cheaply made, quickly sold. Unlimited demand, large profits. Write for proof. Dr. Schmidt, Blanton, Florida.

U. S. PATENT on "Force Feed Oil Can" possessing many unique features. Outright sale for \$500. For full particulars address George Dutton, Vancouy Sask, Canada.

INVENTIONS FOR SALE

FOR sale, two valuable inventions No. 571915 and 587510. For information, address Thomas D. Griffin, Box 293, Augusta, Ga.

TYPEWRITERS AND SUPPLIES

ALL makes rebuilt, refinished and guaranteed five years; thirty days' free trial allowed. Olivers, Underwoods, Monarchs, Remingtons; others \$15.00 up. Send for our lists and agents' proposition. Typewriter Exchange, 2314 University Ave., New York City, New York.

LANGUAGES

WORLD—Romic System, Masterkey to All Languages. Primers, 23 languages, \$1.94 each language: Arabic, Bohemian, Bulgarian, Cantonese, Chindau, Danish, Dutch, English, Scotch English, French, German, Hungarian, Italian, Japanese, Latin, Panjabi, Polish, Portuguese, Rumanian, Russian, Secchana, Spanish, Swedish. Pronunciation-Fables, 94 languages, 30c each language. Languages Publishing Company, 8 West 40th Street, New York.

PRINTING, ENGRAVING, MULTIGRAPHING

LETTERHEADS, envelopes, 500, \$2.65. Samples free. Quality Printery, Marietta, Ohio.

100,000 1 x 2" labels, \$33.00. 3,000, \$2. Save 30%. Wolf Labels, Station E, Philadelphia.

BETTER printing for less money! Send for our large package of samples of hundreds of items every user of printing is interested in. These samples worth dollars will be sent for 10 cents to pay postage. Ernest Fantus Company, 525 South Dearborn Street, Chicago.

EMBOSSED business, personal stationery. Samples, stamp. Daniels P. Company, Pittston, Pennsylvania.

225 BOND letterheads, envelopes, billheads, cards, \$1.25 each. Combination, \$4. Economic Printery, Leonia, New Jersey.

CARDS printed to order, business or visiting, 50c per 100, \$2.50 per 1000, postpaid. McMath Press, Brent, Kentucky.

200 LETTERHEADS, 100 envelopes, correspondence size, neatly printed for only \$1.50 prepaid. Oberon, Box 599, Milwaukee, Wisconsin.

1,000 LETTERHEADS or envelopes, \$3.00. Sent prepaid. Samples free. Monitor Press, Stockham Bldg., Morrisville, Pennsylvania.

IMITATION typewritten letters, \$3.60 thousand; 500, \$2.25. Printing. Samples. Deluxe Service, Box 540-EY, Chicago.

POULTRY AND LIVE STOCK

SPENCER Lurken, half turkey chicken, average 200 eggs. Booklet for stamp. Z. T. Spencer, R. 1, Santa Cruz, California.

BREED squabs. Book free. C. Rice, Melrose Highlands, 77, Massachusetts.

DOGS

FOR Great Danes that have size and intelligence, write Collins Kennels, Box 130, Reedburg, Wisconsin.

EDUCATIONAL AND INSTRUCTION

USED correspondence school courses only one quarter original price; bargain list 1000 courses free; used courses bought. Students' Exchange, 47A West 42nd Street, New York.

DOUBLE entry bookkeeping mastered in 60 hours; guaranteed; diploma. International Bookkeeping Institute, Springfield, Missouri, Desk 10

LINCOLN-JEFFERSON University. Home Study in Academy College, Theological, Law, Music, Pharmacy. Business and Graduate schools, leading to degrees. Box G, 64 W. Randolph Street, Chicago.

BE a laboratory expert. Earn \$300 to \$500 a month. Interesting extension and resident courses. (Diplomas and degrees granted. Bacteriology, urinalysis, blood analysis, etc., quickly and thoroughly taught. 46-piece outfit free. Write today for free 34-page prospectus. Physicians & Surgeons College of Microbiology, Room 971, 550 Garfield Avenue, Chicago.

STUDY bacteriology—become a laboratory expert, course interesting, can be mastered in few months at home or in school. Good paying positions open. Degree granted our graduates. School 13 years old. Send for announcement. American College of Bacteriology, 2923 S. Michigan Avenue, Chicago, Illinois.

HYPNOTISM easily learned. Lessons guaranteed. Postpaid \$1.10. Smith Publishing Co., Springfield, Mass.

CORRESPONDENCE courses. Bargain prices. Bulletin 1064 free. Used courses bought. Instruction Correspondence Exchange, 1966 Broadway, New York.

DEVELOP your psychic powers and become a spirit medium. Instructive lesson free. Address Occult, Box 1331, Tampa, Florida.

BOOKKEEPING in a week! \$2 postpaid. Dukens, 1857-59 Walton Avenue, New York.

FRANKLIN University, Philadelphia, Pa., 1633 Locust Street. Send for information for courses on Law, Pharmacy, College Courses, Graduate Courses, Business Administration, Accountancy, Bookkeeping, Chemistry, Bacteriology and 60 other courses. Address Dr. J. M. Rosenthal, Secretary Home Study and Residence Courses.

SELF-UNDERSTANDING, self-mastery, through your Emotional Keynote. Write Robert Knox, Box 728, San Francisco, California.

PLAYS AND ENTERTAINMENTS

YOU'LL have lots fun exchanging cheery letters in my club. Eva Moore, Box 908, Jacksonville, Florida. (Stamp.)

MAGIC, stage money, books. Catalogs 10c. Gilmagico, Morgan Park, Chicago.

PLAYS, musical comedies and revues, minstrel music, blackface skits, vaudeville acts, monologs, dialogues, recitations, entertainments, musical readings, stage handbooks, make-up goods. Big catalog free. T. S. Denison & Co., 623 So. Wabash, Dept. 26, Chicago.

CRYSTAL Gazing. Book 75c. Also Crystals. Crystal Gazing Company, 125 Station "B," Kansas City, Missouri.

BOYS—girls—big package 20 new games. Enjoy long winter evenings. For 15c. Jax Company, Steger, Illinois.

JOKERS' novelties. Great fun. List free. Clifford Fenner, 2401 Jefferson, Louisville, Kentucky.

TRICKS—Parlor or stage. Superior quality. 160-page illustrated catalog, 10c. Oaks Magical Co., Dept. 200, Oshkosh, Wisconsin.

EXCHANGE post cards and books. Members everywhere. Century Club, Box 87, Copley Square Station, Boston, Massachusetts.

REAL ESTATE AND FARM LANDS

PROPERTY OWNERS—Get cash for your real estate, business, invention or other property. To quickly sell, exchange or buy property any kind anywhere write Western Security Co., 103, Hannibal, Missouri.

LAND Opportunity! \$10 to \$50 down starts you on 20, 40, 80 acres; near thriving city in Lower Michigan. Balance long time. Write today for free illustrated booklet giving full information. Swigart Land Company, L-1251 First National Bank Building, Chicago.

PECAN-Orange groves. Department 8, Suburban Orchards Co., Biloxi, Mississippi.

WANT to hear from owner having farm for sale; give particulars and lowest price. John J. Black, 174th Street, Chippewa Falls, Wisconsin.

Are You Ever Tongue-Tied At a Party?

HAVE you ever been seated next to a man, or a woman, at a dinner and discovered that there wasn't a thing in the world you could talk about?

Have you ever been tongue-tied at a party—actually tongue-tied, you know, and unable to say what you wanted to say, hesitant and embarrassed instead of well-poised and at ease?

It is humiliating to sit next to a young lady or a young man, at a dinner table and not be able to converse in a calm well-bred manner. It is awkward to leave one's dance partner without a word—or to murmur some senseless phrase that you regret the moment it leaves your lips.

Embarrassment robs so many of us of our power of speech. Frequently people who are quite brilliant talkers among their own friends find that they cannot utter a word when they are among strangers.

At a party, do you know how to make and acknowledge introductions in a pleasing, well-poised manner? Do you know how to mingle with the guests, saying the right thing at the right time? Do you know what to say to your hostess when you arrive, and what to say when you depart?

Does conversation lag every time it reaches you? Are you constrained and ill at ease throughout the evening?

The difference between being a calm, well-poised guest and an embarrassed, constrained guest is usually the difference between a happy and a miserable evening.

Are You Ever "Alone" in a Crowd?

THE man who does not know exactly what is expected of him at a party or a dance, feels alone, out of place. Often he feels uncomfortable. He imagines people are noticing him, thinking how dull he is, how uninteresting.

The woman who does not have a pleasing, engaging manner invariably has the "panicky" feeling of a wallflower. She is afraid of making blunders, constrained and embarrassed when she should be entirely at ease.

Good manners make good mixers. If you do not want to be tongue-tied at a party, if you do not want to feel "alone" in a crowd, make it your business to know exactly what to do, say, write and wear on every occasion. The man or woman who is able to do the

correct and cultured thing without stopping to think about it is the man or woman who is always welcome, always popular, always happy and at ease.

The Easiest Art to Master

Music, painting, writing—most arts require long study and constant application. Etiquette, which is one of the most useful arts in daily life can be mastered in almost one evening.

Etiquette tells you everything you want to know about what is worn and what is done in good society.

By telling you what to say and when to say it, by explaining exactly what to do under all circumstances, etiquette gives you a wonderful poise and ease of manner. Instead of being tongue-tied, it shows you how to be a pleasing, interesting conversationalist. Instead of being "alone" it teaches you the secret of making people like you and seek your company.

Mistakes That Condemn Us As Ill-Bred

There are countless little blunders that one can make at a party or a dance. For instance, the man who mutters "Pleased to meet you" over and over again as his hostess introduces him to the other guests is revealing how little he really knows about polite society. The woman who says "Mr. Blank, meet Miss Smith" makes two very obvious mistakes.

At the dinner table, in the ballroom, with strangers and with one's own friends, one must avoid the little social blunders that can cause embarrassment. An easy, calm, engaging manner is of much greater importance than a pretty gown or a smart new suit.



The Book of Etiquette—Authoritative and Complete

The Book of Etiquette, in two large volumes, covers every phase of etiquette. It solves every problem that has ever puzzled you.

In the Book of Etiquette you will find absorbing chapters on dinners, on teas, on weddings, on engagements. You will find a most fascinating chapter on the bride's trousseau, and a wonderful chapter devoted to the business woman. There are chapters on introductions, on correspondence, on speech, on dress. Nothing is omitted, nothing is forgotten.

Sent to You Free for 5 Days' Examination

Won't you let us send you, entirely free and without obligation, the two-volume set of the Book of Etiquette? No money whatever is necessary. Keep the books for 5 days and examine them thoroughly. Within that 5-day period decide whether you want to return the books without one penny's cost to you, or keep them and send us only \$3.50 in full payment.

You will be the sole judge. This is a free proof offer—the Book of Etiquette is sent to you free for examination before you purchase it.

Just clip and mail the coupon, and the Book of Etiquette will be in your hands in a day or two. Nelson Doubleday, Inc., Dept. 253, Garden City, N. Y.

FREE EXAMINATION COUPON


Nelson Doubleday, Inc., Dept. 253
Garden City, New York

Without money in advance, or obligation on my part, send me the two-volume set of the Book of Etiquette. Within 5 days I will either return the books or send you \$3.50 in full payment.

Name.....

Address.....

☐ Check this square if you want these books with the beautiful full-leather binding at \$5, with 5 days' free examination privileges.
(Orders from outside the U. S. are payable \$3.50 cash with order.)

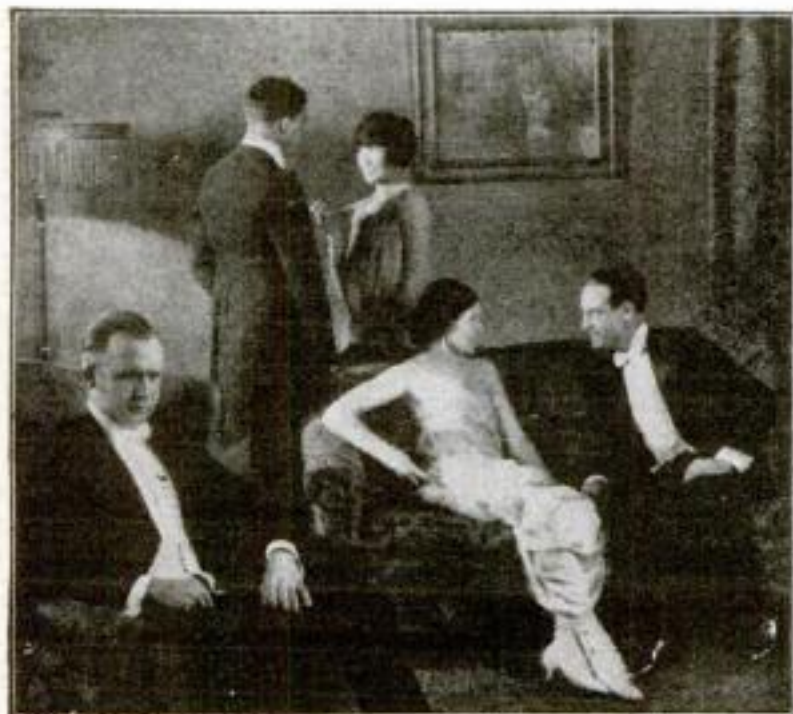



Your Choice
\$20 Violin, Mandolin, Guitar,
 Ukulele, Hawaiian Guitar,
 Banjo or Banjo Mandolin,
 Tenor Banjo or Cornet,
 Banjo Ukulele

FREE

Actually given away, absolutely free. Last year we gave away thousands of high-grade musical instruments on this sensational offer, now repeated for YOUR benefit.

We have the most wonderful new system of teaching NOTE music by mail. Take your choice of any of these magnificent instruments absolutely free and learn to play by this easy to learn method. Can have you playing standard note music in 4 lessons. A very small charge for lessons—just a few cents a week—your only expense. Your success guaranteed. Pay nothing if you fail to learn; you take no risk. Complete outfit free with every instrument. Don't wait a minute, but mail the coupon NOW.

To Advertise Our Copyrighted Course

Our plan is, \$2.00 monthly for lessons. No charge for instruments. Ukulele and banjo ukulele given free with 20 lessons at 50c a lesson. Tenor banjo and Hawaiian Guitar given free with 32 lessons at 50c a lesson; Violin, mandolin, guitar, banjo mandolin and banjo guitar given free with 56 lessons, 43½c a lesson. Lessons are mailed one each week. Fill out the coupon and enclose \$2.00 or, we will send instrument and complete outfit subject to examination at express office C. O. D. \$2.00 for first month's lessons, and you will get an instrument you will be proud to own. At end of one week if you are not delighted with instrument and lessons, send outfit back and we will refund your money.

Free Instrument Coupon

Slingerland's Correspondence School
 of Music
 Department 207 1815 Orchard Street,
 Chicago, Illinois.

Please send me one.....free.
 (Name of Instrument)

- ☐ PLAN NO. 1. I am enclosing \$2.00 for first month's lessons.
- ☐ PLAN NO. 2. Send outfit and lesson C. O. D. \$2.00; but if I am not satisfied at end of one week's trial, I will return outfit and my \$2.00 is to be returned to me or, I will pay \$2.00 monthly until lessons are paid for.

Name.....

Street.....R.F.D.....

City.....State.....

Do not delay, but mail the coupon today, before it is too late. Be sure to state whether you want a free Violin, Mandolin, Guitar, Ukulele, Hawaiian Guitar, Banjo Mandolin, Tenor Banjo. We guarantee any of these instruments positively worth \$20 or more. For Cornet, Piano and Organ and further information, write for booklet.

SLINGERLAND'S CORRESPONDENCE SCHOOL OF MUSIC

Dept. 207 1815 Orchard St.,
 Chicago, Illinois

GET U. S. GOVERNMENT LIFE JOBS



RAILWAY MAIL CLERKS TRAVEL CONSTANTLY

\$1600 TO \$2300 A YEAR

Many Other Positions:
 City Mail Carriers
 Customs Clerks
 Internal Revenue Clerks
 City Postal Clerks

**MEN-BOYS
 18
 OR OVER**

Short Hours
 Pleasant Work
 Rapid Advancement
 Permanent Employment
 Long Vacation With Pay

Fill out and mail the attached coupon now.
 You must act at once.

We will immediately send you full description of the positions open to you, with a full description of the work, hours, vacation, and salaries.

**DO IT TODAY. TOMORROW
 MAY BE TOO LATE!**

FRANKLIN INSTITUTE

Dept. N281, Rochester, N. Y.

Kindly send me without any obligation whatever on my part, and entirely free of charge (1) a full description of the position checked below; (2) Sample examination questions; (3) Free copy of copyrighted book, "Government Positions and How to Get Them;" (4) A list of U. S. Government Jobs obtainable; (5) Tell me how to get a position.

..... Railway Mail Clerk..... (\$1600-\$2300)
 Bookkeeper..... (\$1140-\$1800)
 Postoffice Clerk..... (\$1400-\$1800)
 City Mail Carrier..... (\$1400-\$1800)
 Rural Mail Carrier..... (\$1800-\$2600)
 Customs Positions..... (\$1100-\$2000)

Name.....
 Address.....
 Use This Coupon Before You Mislay It—Write Plainly—N281

Money Making Opportunities *continued on page 12*

Money Making Opportunities

FOR MEN AND WOMEN

BE a detective. Excellent opportunity, good pay, travel. Write C. T. Ludwig, 424 Westover Bldg., Kansas City, Missouri.

"SEXUAL philosophy," 12c. Clear, specific, authoritative, complete, best, satisfies. Fred B. Kaessmann, Lawrence, Massachusetts.

GENUINE Indian baskets, blankets and wampum—wholesale. Catalogue. Gilham, Kelseyville, California.

OPTICAL GOODS

ARTIFICIAL eyes, \$3. Booklet free. Denver Optic, 508 Barclay, Denver, Colorado.

PHOTOGRAPHY AND SUPPLIES

HAVE you a camera? Write for free sample of our big magazine, showing how to make better pictures and earn money. American Photography, 156 Camera House, Boston, 17, Massachusetts.

SAMPLE enlargement, dime and negative (returned). Sample 6-exposure roll finished glossy, 25c silver. Brown Studio, Lake Elmo, Minnesota.

SPECIAL trial offer: Any size kodak film developed for 5c; prints 3c each. Over-night service. Expert work. Roanoke Photo Finishing Co., 212 Bell Ave., Roanoke, Virginia.

BOOKS AND PERIODICALS

SEXOLOGY—Complete catalog of international famous books sent to professionals and advanced adult students. The Book League, Dept. O, 5 Columbus Circle, New York.

DISEASES and their innate healer. Book 50c. Arthur J. Stevens, Wauseon, Ohio.

VIBRATIONS—sounds—lights—colors—radio—cold lights—Auras illustrated. Stevens Research Laboratories, Stratford, San Francisco, California.

ECSTATIC Stigmasee Emmerich, Nativity, Egypt, Cans. 4 books for 20c. Klein Co., Brandon, Minnesota.

MIND Power, 50c. Things kept secret from the Foundation of the World, \$1.00. Send 10c for complete lists of Hindu candles, incense, crystals, books, etc. "India," 1240 Home Avenue, Oak Park, Illinois.

BOOKS. Any kind. Lists. Higene's, R2441 Post Street, San Francisco.

CHALK TALKS

LAUGH producing program, \$1.00. Circulars free. Cartoonist Balda, Oshkosh, Wisconsin.

FOR INVENTORS

INVENTORS: Protect your invention through A. M. Wilson, Inc., Washington, D. C. Over 25 years of efficient, expert, confidential service. Skilled in Radio-Electrical, Chemical and Mechanical fields. Our new Patent Book, giving much necessary and very useful information which every inventor should know, will be sent free upon request. Prompt and careful attention. Highest references. Moderate fees. Send sketch or model for our careful opinion and preliminary advice. Write today to A. M. Wilson, Inc. (Radio 3 ARH), 320-8 Victor Building, Washington, D. C.

INVENTOR'S educator. 600 mechanical movements. 50 perpetual motions. How to procure and sell patents. Mechanical movements greatly assist inventors, suggest new ideas. Explains how to select an attorney and avoid patent sharks. Price \$1.50. Postage free. Fred G. Dieterich, 681 Ouray Building, Washington, D. C.

THE G. & G. Manufacturing Company, 3116 Spring Grove Avenue, Dept. A, Cincinnati, Ohio. Special machinery, models, dies, patterns, tools, metal stampings, gears, contract manufacturing.

PATENTS—Write for free Guide Book and Evidence of Conception Blank. Send model or sketch of invention for free opinion of its patentable nature. Highest references. Reasonable terms. Victor J. Evans & Company, 156 Ninth, Washington, D. C.

PATENTS—Send for free book. Contains valuable information for inventors. Send sketch of your invention for free opinion of its patentable nature. Prompt service. (Twenty years' experience.) Talbert & Talbert, 436 Talbert Bldg., Washington, D. C.

GET patents yourself. Complete instruction, \$1. Cooper Cutting, Campbell, California.

PATENTS—My fees in installments. Advice book free. Frank Fuller, Washington, D. C.

I SELL patents. Established in 1900. Charles A. Scott, 773P8, Garson Avenue, Rochester, New York.

INVENTIONS commercialized. Patented or unpatented. Write Adam Fisher Mfg. Co., 183 St. Louis, Mo.

LIST of 50 Patent Buyers for 25 cents. R. Clawson, Box 790, Cincinnati, Ohio.

LATEST complete book. "Patents and Invention." Prizes for ideas. Price \$1.00. Stewart Press, Dept. 11, Middletown, Connecticut.

INVENTORS—Do your inventions pay? Save money, time and worry. Harry T. Clayton, 4162 N. Franklin Street, Philadelphia, Pennsylvania.

UNPATENTED ideas can be sold. I tell you how and help you make the sale. Particulars free. Write W. E. Greene, 106 The Atlantic, Washington, D. C.

AUTHORS—MANUSCRIPTS

WRITE for newspapers and magazines. Big pay. Experience unnecessary, details free. Press Reporting Syndicate, 400, St. Louis.

WRITERS: Stories, poems, plays, etc., are wanted for publication. Literary Bureau, 117, Hannibal, Missouri.

FREE to writers—a wonderful little book of money-making hints, suggestions, ideas; the A B C of successful story and play-writing. Absolutely free. Just address Author's Press, Dept. 15, Auburn, New York.

\$33 FOR ideas. Photoplay plots accepted any form: revised, criticized, copyrighted, marketed. Advice free. Universal Scenario Corporation, 904 Western Mutual Life Bldg., Los Angeles.

WRITERS: Have you a song-poem, story, photoplay, to sell? Submit manuscript now to Music Sales Company, 48, St. Louis.

MOTION PICTURE BUSINESS

WRITE photoplays: \$50 each. Experience unnecessary. details free to beginners. Producers' League, 194, St. Louis.

MOVIE films rented. Particulars free. George Fisher, Cos Cob, Connecticut.



\$1000 Reward

It's Yours! Take It!



I Guarantee You Results Worth That Much in One Year

By A. L. Pelton—"The Man Who Helps People Succeed"

ABSOLUTELY! I gladly stake my reputation on it. Within one year I'll show values worth \$1,000 to you, or it won't cost you a cent! Could anyone make you a fairer offer? No one ever *has*—that's certain. No one ever *dared*. I dare because *I've proved my ability to make good*.

I'll tell you how to boost your earning capacity higher than you ever thought possible—no matter who you are or what you make now. I'll show you abilities in yourself that you didn't know you had—and I'll tell you *exactly how* to make those latent powers *produce*. By a new method that is simplicity itself—*when you know it*—I'll enable you to lift yourself higher in the social scale, higher in business, higher in your own estimation. And I don't care what you think of yourself now—whether you're modest and self-deprecatory, or fat-headed and satisfied! There isn't a man who reads this page whom I can't help. I know, because I have already helped thousands—of all types and degrees.

I'm not a miracle-man. Far from it. I'm a business man. I have my ideals, but they are ideals of common sense that can be turned into Success. I made a good sized fortune for myself before I began showing others how to do it—but now I can safely say that every thousand dollars in my name means one hundred thousand that other people have made by following the principles I advocate! Do you wonder that I can *guarantee* success to you?

Nothing Up My Sleeve—I'm Talking Good Faith and Money

What's the mystery? There isn't any! There are no tricks in my business. I don't work in the dark. I have nothing up my sleeve and I don't try to deceive the eye. When I ask any man to step up and test me, I do so in *perfect good faith*. And I produce

every time—provided only that the man who tests me also acts in good faith. Give and take—but you get far, far more than I do! A hundred times more.

I offer you just this—increased personal power through self-discovery. If that sounds deep, put it this way: *force to conquer by waking up your hidden abilities*. You have them—make no mistake about it. Whether you keep books for somebody else, or command a business of your own, *you possess far greater potential strength than you've ever used*. All really big men have found that out—and it has made them still bigger. Caesar wasn't satisfied with his vast accomplishments, though born to the purple. He went on discovering himself all his life. And he did it *alone*. Schwab is the same type—always finding new power in himself to accomplish big things. Franklin reached astounding heights that way—starting from scratch!

There Is a Formula For Success!

Don't let anyone "bunco" you about "genius," and "fate" and "chance." Those three words all spell "excuse." They play no part in a real man's life. I tell you that any kind of success you want is now within your reach—and *I'm proving it every day to hundreds of people*.

No, I'm not a wizard. I was a poor man, an unsuccessful man, and a hard-boiled doubter, not many years ago. I simply *found myself out*. The credit is not mine. It belongs to another man. His name is Frank Channing Haddock. He *made me*—and ever since then I have been passing his astonishing method to other people. I'm a sort of middleman between a great benefactor and the thousands of men his great practical work is raising to positions of power and self-respect and wealth.

Free Proof That 'What I Say Is True

The method that Dr. Haddock perfected so that *any man* can apply it to himself with definite, practical results is called "Mastery of

Self." It's so full of smashing, positive guarantees of success in life that it would be foolish to attempt a summary of its teachings on this page. So a book has been prepared, for *free* distribution to people who want to *lead* instead of follow, *command* instead of take orders, *live in comfort* instead of dragging along on small wages. The booklet clearly shows why this new power-system is fairly lifting men from obscurity to fame—*exactly how* it inspires the confidence that *overcomes all obstacles*. And all you have to do to get that amazing free booklet is to mail the coupon below.

Here's Where We Both Make Good

Remember—I stand sponsor for this new way for you to achieve distinction in your chosen field. I'm the responsible person who guarantees your success by this method. *You can put it entirely up to me*. I stand by my guns in perfect faith, because Dr. Haddock put me where I stand today and I have raised thousands of other men higher than they dreamed possible, with the same method. So I invite you to *make me make good for you*. And the first step is to send for the free book. If you really want the best things in life—money, position, social recognition—*do it now*. Send the coupon today. I'm waiting for your challenge! You assume no obligation by sending for the free book. And you may find it the turning point in your whole life. So act *now*!

PELTON PUBLISHING CO.
14-F Wilcox Block Meriden, Conn.

FREE BOOK COUPON

PELTON PUBLISHING CO.,
14-F Wilcox Block, Meriden, Conn.

Without obligation please send me at once a **FREE** copy of your book "The Power That Compels Success."

Name.....

Address.....

NEW KIND OF HEAT!

Does Away With Dirty Coal and Wood

No more fires to build, bank or watch—no more dirty heavy coal to carry and lift—no more clouds of ashes to breathe or back-breaking scuttles to empty—no more heating problems—no more cold rooms in Winter—no more suffering from lack of quick fires in uncertain Fall and Spring—no more worries about coal shortages, poor quality or high prices since this wonderful New Invention.



No worry about heat when you can get 3 times the heat of coal by just turning a valve. No coal, wood, ashes.

3 Times the Heat of Coal—at Turn of Valve



Here is the amazing new kind of heat that has ended forever the days of woman's back-breaking servitude to a hot, mussy stove or furnace! The wonderful invention of Mr. B. M. Oliver, of St. Louis, in one minute, turns any coal or wood burner into a modern up-to-date gas stove.

Cheaper Than Coal and Wood

Mr. Oliver calls his invention the Oliver Improved Oil-Gas Burner, because it uses 95% air and only 5% coal oil (ordinary kerosene)—the cheapest fuel there is, turning them into an actual gas that burns with an intensely hot, clean flame. Saves its cost in cleaning bills alone.

Fits All Stoves—Any Kind or Size

Mr. Oliver's wonderful invention is made in sixteen different models to fit any kind of cook stove, heating stove or furnace. Doesn't change your stove. Simply sets in firebox. Easily slipped in, in one minute. Absolutely safe. It lasts a lifetime. Saves your stove.

Hotter Than Coal

You can absolutely depend upon your Oliver to heat your rooms in coldest Winter weather—it gives 3 times the heat of coal. But you needn't worry about the high price of coal. Install this amazing new kind of heat and you can snap your fingers at coal shortages, poor quality or high prices.

Your Oliver burns the cheapest and most reliable fuel there is, kerosene. Just turn the valve and you have heat—as much or as little as you need. Physicians recommend the Oliver as a sure safeguard against colds, influenza, etc.

AGENTS

Oliver agents earn as high as \$500 a month—\$25 a day spare time is easy. Exclusive territory. Big, all-season seller. Write for Special Offer.

Use It 30 Days—FREE

Now, once and for all time do away with household dirt and drudgery. End ashes, dirt, smoke, odor, chopping, shoveling, carrying, dirty, heavy coal and wood. Send immediately for the **FREE ATTRACTIVE BOOKLET, "New Kind of Heat,"** telling all about this amazing new invention. Shows exactly how it works, how it is different from all other burners and tells how you can use it in your stove 30 days, FREE. The famous Oliver Iron-Clad, Money-Back Guarantee protects you.

Send For Big Offer

If you write at once you will be in time to receive Mr. Oliver's very low, introductory price offer and 30-day Free Trial. Get your Oliver installed immediately, before cold weather sets in.



OLIVER OIL-GAS BURNER & MACHINE CO.

Oldest and Largest Manufacturers of Oil-Gas Burners in the World

2007-C OLIVER BUILDING ST. LOUIS, MO.

\$25.00 in PRIZES See top of page 6 in front of book for full details

PRACTICAL ELECTRICAL EDUCATION

Learn by the thorough approved scientific methods which our seventeen years of specializing enable us to give you A. C. and D. C. Armature Winding, Wiring and Testing, Practical Electricity, Drafting, Electrotechnics, Commercial Engineering, Electrical Engineering with B. S. Degree. "Earn While You Learn." Radio Broadcasting WIAO every day. Eighteenth year opens April 1st. Write for Illustrated Catalog. It's Free. Mention age, education and courses interested in.

SCHOOL OF ENGINEERING OF MILWAUKEE PS-3 Milwaukee, Wis.
415 Marshall Street



HERE'S MORE MONEY FOR YOU

150 Home-Study Books

Each of these sure pay-raising self-help books is a complete course of instruction. They cover Electricity, Automobile, Machine Shop, Carpentry, Painting, Engineering, Railroad and twenty other trades. Full catalog FREE. A postcard brings yours. F. J. DRAKE & CO., PUBLISHERS
1003 Michigan Avenue, Chicago

"STAMMERING"

Its Cause and Cure

You can be quickly cured if you stammer. Send 10 cents, coin or stamps, for 288 page cloth bound book on Stammering and Stuttering. It tells how I cured myself after Stammering and Stuttering for 20 years. BENJAMIN N. BOGUE, 691 Beque Bldg., 1147 N. 10th St., Indianapolis

A FILE

NOT A FILE

Stop Forgetting

Make Your Mind an Index from which you select facts, figures, names, facts. Develop concentration, self-control, overcome bashfulness, forgetfulness. Write today for FREE memory and concentration test and illustrated booklet, "How to Remember."

PROF. HENRY DICKSON
Dept. 929 - Evanston, Ill.

Money Making Opportunities

PATENT ATTORNEYS

INVENTORS—Send for form "Evidence of Conception" to be signed and witnessed. Form, fee schedule, information free. Lancaster and Allwine, 232 Ouray Bldg., Washington, D. C.

PATENT applications filed on partial payment plan. Trade-marks, copyrights, etc. Milo B. Stevens & Co., 640 F St., Washington, D. C. Estab. 1864.

MONROE MILLER, Ouray Building, Washington, D. C., patent attorney, mechanical and electrical expert. Best quality of work and results. Moderate charges.

MILLIONS spent annually for ideas! Hundreds now wanted! Patent yours and profit! Write today for free books—tell how to protect yourself, how to invent, ideas wanted, how we help you sell, etc. 501 Patent Dept., American Industries, Inc., Washington, D. C.

PROTECT your rights—write for "Record of Invention" and booklet about patents. Prompt personal service. Advice without charge. J. Reany Kelly, 612-P, Columbian Building, Washington, D. C.

PATENTS procured—trade marks registered—A comprehensive, experienced, prompt service for the protection and development of your ideas. Preliminary advice gladly furnished without charge. Booklet of information and form for disclosing idea free on request. Richard B. Owen, 44 Owen Building, Washington, D. C., or 2276-Z Woolworth Building, New York.

PATENTS, trade marks, copyrights. Prompt, personal, reliable service. Over 30 years' active practice. Write for terms. Book free. Address E. G. Siggers, Box 1, N. U. Building, Washington, D. C.

PATENTS—Send for free book. Contains valuable information for inventors. Send sketch of your invention for free opinion of its patentable nature. Prompt service. (Twenty years' experience.) Talbert & Talbert, 452 Talbert Bldg., Washington, D. C.

PATENTS. Booklet free. Highest reference. Best results. Promptness assured. Watson E. Coleman, Patent Lawyer, 624 F Street, Washington, D. C.

PATENT, trade-mark and copyright specialist. Write at once for free Duplex Conception Form. Personal service. M. E. Jones, lawyer, 509b 7th Street, Washington, D. C.

INVENTORS: Send sketch or model of invention for opinion concerning patentable nature and exact cost of patent. Book, "How to Obtain a Patent," sent free. Tells what every inventor should know. Established twenty-eight years. Highest references, prompt service, reasonable charges. Chandler & Chandler, 440 Seventh, Washington, D. C.

INVENTORS—Expert professional service at lowest cost. Write for explanatory literature. Amon-Baxter, 2240 Rye Avenue, New York.

AMASA HARTWELL BALCOM, Patent Attorney and Engineering Counselor, 808 Munsey Bldg., Washington, D. C. Professional, individual service for inventors. Correspondence solicited.

BEFORE or after filing application for patent on your invention it will pay you to read over my "Inventor's Adviser No. 1," free for asking. M. Labiner, Registered Patent Attorney, 3 Park Row, New York.

HERBERT JENNER, patent attorney and mechanical expert, 624 F Street, Washington, D. C. I report if patent obtainable and exact cost. Send for circular.

LACEY Patent Sense. "The book the inventor keeps." Free. See page 120.

PATENTS promptly procured. Personal, careful and efficient service. Highest references. Moderate fees. Send sketch or model for actual search and advice. George P. Kimmel, Master of Patent Law, 38F, Loan and Trust Bldg., Washington, D. C.

"INVENTOR'S GUIDE" free on request; gives valuable information and advice. Frank Ledermann, 158 Park Row, New York.

REGISTERED Patent Attorney, Mechanical and Electrical expert, Physicist. Send full description of invention for personal advice and estimate of costs. H. F. Lowenstein, 817 McLachlen Building, Washington, D. C.

PATENTS procured and trade-marks registered. Advice and terms upon request. Robb & Hill, 1336 Hanna Building, Cleveland, Ohio. 840 McLachlen Building, Washington, D. C.

PATENTS—Before disclosing an invention the inventor should write for our blank form "Record of Invention." This should be signed, witnessed and returned to us together with model or sketch and description of the invention and we will give our opinion as to its patentable nature free. Our Three Books mailed free to inventors. Our Illustrated Guide Book, "How to Obtain a Patent" contains full instructions regarding patents. "List of Patent Buyers" sent free, contains unsolicited letters from manufacturers and others who are constantly writing us regarding the purchase or leasing of meritorious patents. We have recently received a number of requests among which are the following: 45 requests for Miscellaneous Articles in all classes of invention, too numerous to mention. 14 requests for Household Novelties and Specialties. 11 requests for General Novelties and Mail Order Articles. 6 requests for Automobile Accessories and Specialties. 3 requests for Small Metal Articles and Metal Specialties. 2 requests for Radio Accessories and Equipment. 1 request for Amusement Apparatus. 1 request for Refrigerators. 1 request for Tractors and Similar Machines. 1 request for Farmers' Supplies. 1 request for Games. 1 request for Toys. We endeavor to assist our clients in the commercial development of their inventions. Owing to the growth of our business we have established for the benefit of our clients, Branch Offices in New York City at 1007 Woolworth Bldg., Philadelphia at 714 Liberty Bldg., Pittsburgh, Pa., at 524 Empire Bldg., Chicago, Ill., at 1114 Tacoma Bldg., and San Francisco, Calif., at 1010 Hobart Bldg. Victor J. Evans & Co., Main Offices, 148 Ninth, Washington, D. C.

PATENTS WANTED

DEVELOP your own patent; write National Information Bureau, Des Moines, Iowa.

DISTRICT MANAGERS WANTED

WORLD'S fastest selling auto accessory! County distributors wanted; write today. G. L. W. Spring Oil Co., San Diego, California.

DISTRICT managers. Big profits. Men capable of organizing and managing crews of lady solicitors can easily clear 50 to \$100 per week with the B. & G. Protector, the original and best protector on the market. Every woman between fifteen and fifty needs and buys it. B. & G. Rubber Co., 618 Penn Avenue, Pittsburgh, Pennsylvania, Dept. 217.

DISTRICT managers, general agents, with ability to organize force of producers wanted. Old established firm. Big paying proposition. Write for details. Fitzcharles Dry Goods Company, 607 Fitzcharles Building, Trenton, New Jersey.

Your Radio-Knowledge Worth Big Money

MANY amateurs are so absorbed in the fascinating fun of radio that they do not realize the big opportunities awaiting them in the commercial field. Thousands of men operating amateur stations have never considered that they can earn amazingly big salaries doing the same easy, interesting work.

Radio Amateur, don't waste your knowledge of Radio. Don't use it only as a fad or a hobby. Radio is more than that. It is a gigantic, six-billion-dollar industry—and growing bigger every day! Hundreds of commercial stations are in operation today; thousands more are being erected. Nearly every vessel on the seas is a floating radio station. Hundreds of manufacturers, thousands of stores, millions of people are interested in this great, new, marvelous industry!

Trained Men Needed Now

Do you realize what this worldwide expansion means to you? Many land radio interests employ a force of a thousand or more Radio men. Every vessel needs from one to three operators. Schools, stores, factories, newspapers and cities need operators, demonstrators, salesmen, instructors, technicians, designers, inventors, engineers. Everywhere you turn you see the tremendous demand for more trained certified Radio-tricians.

Here is your greatest opportunity for fortune and success. Take advantage of it. Radio needs YOU NOW! Get into this fascinating profession. The field is uncrowded. Jobs are literally going begging for competent trained men. The pay is big, and the work fascinatingly easy.

"Cash In" On Your Knowledge

Don't be a stay-behind. Don't let the other fellow beat you to the wonderful positions now awaiting for you in Radio. Make Radio a profession—not a plaything. Don't let your Radio-knowledge go to waste. "Cash in" on it—Big!

Thousands of men with no knowledge or experience now, are preparing for wonderful careers in this great profession. Will you allow these beginners to get ahead of you? Will you let them get all the big jobs while you sit idly by? Will you always be satisfied with being just an extra-good amateur when it is so easy to earn big money as a professional Radio-trician?

"Radio Headquarters" Will Help You

The knowledge you have now of Radio operation and maintenance makes it easy for you to train yourself and obtain a wonderful position. You can work up to positions paying as high as \$10,000 a year. If you are attracted by the adventure and excitement of travel, Radio offers you a glori-

ous opportunity to see the four corners of the earth, with all expenses paid and a fine salary besides, or you can stay at home and take one of the fine positions all around you.

Use your present Radio experience to help you achieve a wonderful success in this great field. America's "Radio Headquarters," the National Radio Institute, has devised an amazing new plan that will complete your Radio education in spare time at home, and enable you to qualify for a Government Commercial operator's license so you can take your place in the Radio profession in the shortest possible time.

One of the features of this remarkable course, which is approved by the Government, is that you are furnished free with four wonderful instruments for practical work at home. Among them is the wonderful Natrometer which quickly helps you acquire expert speed and accuracy in sending and receiving code.

In addition to this splendid, simplified short-cut course and the four patented instruments, nationally known Radio experts are your instructors. They correct your papers, give you the advice you seek, help you in every way with their wide experience to become a successful Certified Radio-trician.

Get This New, Free Book

The National Radio Institute is ready to give you the same practical help that has put hundreds of its graduates on the highway of Radio success. Read the letters in the panel from just a few of our 8000 students and graduates. You have the basic knowledge now.

Just a part of your spare-time spent in learning the professional side of Radio, will qualify you for your career in this field of unparalleled opportunities.

Radio is paying enormous earnings to men all over the country today—it is making hundreds of men wealthy. Find out at once about your opportunity in Radio. Send for the interesting big Book which tells all about the future waiting for you in this great field, and gives complete details of the plan by which the National Radio Institute prepares you quickly in your spare time to become an expert Radio-trician and helps you through its Free Employment Service to a good Radio position. Mail the coupon, or write a letter NOW!

NATIONAL RADIO INSTITUTE

Radio Headquarters

Dept. 12-C

1345 Pennsylvania Ave., N. W.

Washington, D. C.

NATIONAL RADIO INSTITUTE,

Radio Headquarters,

Dept. 12-C

1345 Pennsylvania Ave., N. W.

Washington, D. C.

Please send me your free book telling how I can become a Certified Radio-trician in my spare time at home, with details about the positions open to me in Radio.

The National Radio Institute Can Help You As It Helped These Men

N. R. I. Graduate a Radio Engineer

I believe your course in Radio Telegraphy and Telephony operation to be the best and most complete on the market today. I feel more than confident that any student taking your course and applying himself should have no trouble in passing the government examination. I, myself, am a graduate of your school.

R. J. DAUGHERTY, Radio Engineer,
Hamilton, Ohio.

No Course More Complete

No course could be more complete, more clear to the beginner. Besides giving a comprehensive study in Radio, the N. R. I. course practically covers every branch of electrical phenomena. An N. R. I. graduate has a wide and useful knowledge that cannot but be of use to him in any line of electrical work.

NELSON V. LLOYD,
Ridgely, Washington.

Easy to Get Good Job

Only a short letter to let you know that I am still on board and waiting for the ship to sail. Tell your students for me that a man with a license has no trouble obtaining a good position. Believe me, a job like this is worth a good deal of studying.

L. M. WARING, JR.,
S. S. "Lake Farnley," Norfolk, Va.

Course Superior to Others

I will say that the training I received from you and the careful instructions have enabled me to thoroughly understand Radio. The Natrometer is a great help to one who wishes to receive the code fast. The course is superior by far, to any other that I know of.

PHILIP
PAUDER,
Lawrence,
Mass.



Name

Age

Address

City State

Amaze Your Friends— Learn Music Quickly at Home

Through This Wonderful New Method You Can Now Learn to
Play Your Favorite Instrument in a Few Short Months—
Entire Cost Averages a Few Cents a Lesson

"How did you ever do it? Where in the wide world did you ever learn to play so quickly?"

This is the question that thousands of our students have been asked and are being asked daily. With our wonderful easy print and picture lessons for beginners, their progress has been nothing short of astonishing. Not only their friends, but they themselves were amazed at the sudden ability to play or sing. With this accomplishment they have been able to achieve greater popularity than they ever thought possible. And you can do the same.

Even if you don't know the first thing about music, don't know one note from another—with this new method you can easily and quickly learn to sing or to play your favorite musical instrument. And all in your spare time at home—without a teacher.

To those not acquainted with our system this may sound like a pretty strong statement. Yet we stand ready to back up every word of it.

We have taught music to over 300,000 men, women and children in all parts of the world. Just think!—ALMOST A THIRD OF A MILLION GRADUATES. Their thousands of grateful letters to us are more convincing than anything we could say on the true merit of the system.

This method removes all the discouraging drawbacks and entangling hindrances

of the old way of learning music. There is no need of joining a class, pinning yourself down to certain hours of practice, paying a dollar or more per lesson to a private teacher.

All these obstacles have been eliminated entirely. In their place are delightfully clear, easy and interesting les-

sons which make every step as simple as A, B, C. You take lessons in the privacy of your own home with no strangers around to embarrass you. Practice whenever it is most convenient for you.

So easy is our method that children only 10 to 12 years old have quickly become accomplished singers and players, as well as men and women 50 to 60 years old—including many who have never before taken a lesson.

And the lessons are just as thorough as they are easy—no "trick" music, no "numbers," no makeshifts of any kind. We teach you the only right way—teach you to play or sing by note.

Think of the pleasure and happiness you can add to your own daily life once you know how to play! Think of the popularity you can gain—for players and singers are always in demand at social gatherings of every kind.

Thousands of our students now play in orchestras, at entertainments, etc. Many have orchestras of their own. Why can't you do the same?

SPECIAL OFFER

When learning to play or sing is so easy why continue to confine your enjoyment of music to mere listening? Why not at least let us send you our free book that tells you all about this method? It shows you how easy it is to turn your wish to play or sing into an actual fact. Just now we are making a special short-time offer that cuts the cost per lesson in two—send your name now before this special offer is withdrawn. Instruments supplied when needed, cash or credit. No obligation—simply use the coupon or send your name and address in a letter or on a postcard. **Please Write Your Name and Address Very Plainly, so that there will be no difficulty about the booklet reaching you.**

U. S. School of Music, 83 Brunswick Bldg., New York City

U. S. School of Music,
83 Brunswick Bldg., New York City

Please send me your free book, "Music Lessons in Your Own Home," and particulars of your special offer. I am interested in the following course:

Name of Instrument or Course

Name.....
Please Write Plainly

Address.....

City.....State.....

For Beginners or Advanced Pupils

Piano	Harmony
Organ	and
Violin	Composition
Drums and	Sight Singing
Traps	Guitar
Mandolin	Ukulele
Clarinet	Harp
Flute	Cornet
Saxophone	Piccolo
Cello	Trombone
Hawaiian Steel	Banjo
Guitar	Tenor Banjo
Voice and Speech Culture	
Automatic Finger Control	

Do You Stammer?

Same Methods based on many successful years' experience and scientific research, for the correction of all Speech Defects employed in the Speech Clinics at the Ithaca Conservatory of Music under the direction of

DR. FREDERICK MARTIN,
(himself once a confirmed stammerer)

Formerly Director of Speech Improvement, Board of Education, New York City. Lecturer, Post-graduate Medical Hospital, New York City. Normal Courses for Teachers of Speech Improvement. Dormitories and complete equipment.

MARTIN INSTITUTE FOR SPEECH CORRECTION
425 Dewitt Park, Ithaca, N. Y.

BECOME

Railway Mail Clerks

\$1600 to \$2300 Year

MEN—BOYS 18 TO 35

Steady Work, No Layoffs, Paid Vacations

Common education sufficient

Send coupon today—SURE



F. W. Tamblin, 437 Ridge Bldg., Kansas City, U. S. A.

Begin Today—Write for My FREE BOOK
I can make a good penman of you at home during spare time. Write for my FREE BOOK, "HOW TO BECOME A GOOD PENMAN." It contains specimens and tells how others mastered penmanship by the Tamblin System. Your name will be elegantly written on a card if you enclose stamp to pay postage. FREE BOOK—Write for it today.



FRANKLIN INSTITUTE, Dept. N282, Rochester, N. Y.

Sirs: Send me, without charge, (1) sample Railway Mail Clerk Examination questions; (2) Tell me how I can get a government position; (3) list of many government jobs obtainable.

Name.....

Address.....

Money Making Opportunities

AGENTS AND SALESMEN WANTED

SALESMEN—Become independent—Own your business, experience unnecessary selling our \$7,500 accidental death, \$50 accident, \$25 sick weekly benefits, \$12.50 yearly, other amounts proportionate. Guaranteed steady income from renewals, \$250,000 deposited Insurance Department. Registration Department F, Newark, N. J.

TREMENDOUS opportunity for ambitious agents. The indispensable, rapid selling speedy dish washer. Price \$3.50. No competition. No investment. Easy selling plan. Convenient sample. Commission daily. Make application today—exclusive territory. Sheppard-Luth Mfg. Co., 16H Hudson St., New York.

LEARN to stop pain with electricity. Rheumatism, headache, neuralgia, neuritis, lumbago. Wonderful invention. Electreat does the work. Only \$12.50. Sells itself. All you have to do is show it. Demonstrator salespeople getting rich. Enormous profits. Write for particulars. Electreat Mfg. Co., R. 5, Peoria, Illinois.

AGENTS—clean up \$100 weekly with "Nifty Nine." Weekly average 100 sales—dollar profit each. 30-40 sales daily frequently made; demonstrating outfit cinches order. 30 other coin-consumers, all daily necessities. Postal brings our unique plans. Davis Products Co., Dept. 89, Chicago.

AGENTS. Sell Wolverine laundry soap. A wonderful repeater and good profit maker. Free automobile to buyers. Wolverine Soap Co., Dept. 235, Grand Rapids, Michigan.

AGENTS: Housewives everywhere delighted with new article which removes stains from clothing, table linen, etc. Write quick territory and sample. Make \$2 an hour. Christy, 78 Union, Newark, New York.

WORLD'S fastest agent's seller. 300% profit. Needed in every home and store. Establish permanent business. Premier Mfg. Co., 815 E. Grand Blvd., Detroit, Michigan.

WE pay \$200 monthly salary, furnish rig and expenses to introduce our guaranteed poultry and stock powders. Buder Company, X 371, Springfield, Illinois.

GET our free sample case toilet articles, perfumes and specialties. Wonderfully profitable. La Derma Co., Dept. F, St. Louis, Missouri.

AGENTS \$85.00 weekly. Eradium (Luminous) Crucifix (It shines in the dark). Sell in every Catholic home for \$2.00, costs \$4c. No capital required. Free samples. We deliver and collect. Pioneer Corporation, 6307 Yale Ave., Chicago, Illinois.

AGENTS—Make a dollar an hour. Sell Mendeta, a patent patch for instantly mending leaks in all utensils. Sample package free. Collette Mfg. Company, Dept. 467, Amsterdam, N. Y.

FREE book. Start little mail order business. Pier Dept. 154A, 74 Cortland Street, New York.

AGENTS. Fifty-five fast sellers needed in every home. \$5 to \$15 a day easily made. B. & G. Rubber Co., 618 Penn Avenue, Pittsburgh, Pennsylvania, Dept. 244.

YOU may make \$2,000 per month selling Alexander Publicity Film Service. It is being done. We will train you to sell a service that advertises its own money-making effectiveness, to the most successful bankers and business men. It helps sell itself. A new man learned, in a week, to make \$94.00 per day. Alexander Film Company, 1141 Main, Spokane, Washington.

TEN rapid sellers—all profitable. Windshield cleaners, spark plugs, transformers, visors, etc. No investment. Generous commissions. Jubilee Mfg. Co., 64 Sta. C, Omaha, Nebraska.

AGENTS make 500% profit handling auto monograms, new pictures, window letters, transfer flags, novelty signs. Catalog free. Hinton Co., Dept. 125, Star City, Indiana.

SALESMEN can make \$5.00 a day selling our calendars, pencils, signs, advertising novelties, yardsticks, whistles, etc. Liberal terms. Sells entire year. Fine side line. Local and traveling agencies. Model Calendar Co., Dept. 309, South Bend, Indiana.

PATENTS. Write for free Illustrated Guide Book. Send sketch or model for free opinion of its patentable nature. Highest references. Prompt attention. Reasonable terms. Victor J. Evans & Co., 174 Ninth, Washington, D. C.

AGENTS: Big profits. Best and cheapest window letters made. Easily applied. Dime brings five samples. Particulars free. Staibrite Company, 1115 Second Avenue, New York.

MEN only. Sell new novelty. Sample 25 cents. Howard Eddy, Meriden, Connecticut.

EVERYBODY uses extracts. Sell Duo Double Strength Extracts. Complete line household necessities. Big repeaters. Write today. Duo Co., Dept. E66, Attica, N. Y.

MEN, women, sell the Coué book, everybody is buying; no experience necessary; big profits; spare or whole time; no investment; free particulars. American Library Service, 500F Fifth Avenue, New York.

SALESMEN, we pay larger commissions than any other Brush House in the country to men selling our line of Sanitary twisted in wire Brushes. Sanitary Wire Grip Brush Co., 15-17 Mercer Street, New York.

WE start you without a dollar. Soaps, extracts, perfumes, toilet goods. Experience unnecessary. Carnation Co., Dept. 21, St. Louis.

AGENTS—Steady income. Large manufacturer of handkerchiefs and dress goods, etc., wishes representative in each locality. Factory to consumer. Big profits, honest goods. Whole or spare time. Credit given. Send for particulars. Freeport Mfg. Co., 24 Main Street, Brooklyn, New York.

57 MILES per gallon made with new patented gasoline vaporizer. Write for particulars. Vaporizer Company, Pukwana, South Dakota.

AGENTS—\$15 a day—Easy, quick sales—Free auto—Big weekly bonus—\$1.50 premium free to every customer. Simply show our beautiful 7-piece, solid aluminum handle cutlery set. Appeals instantly. We deliver and collect. Pay daily. New Era Mfg. Co., 803 Madison Street, Dept. 41F, Chicago.


AGENTS—Clever Invention! Inkspoon makes every pen a fountain pen. Fast office seller; big profit, demand increasing everywhere. Exclusive territory offered. Sample free. H. Marui Company, Tribune Building, New York.

A BUSINESS of your own—Make sparkling glass name plates, numbers, checkboards, medallions, signs; big illustrated book. Free. E. Palmer, 512 Wooster, Ohio.

MAKE \$25 to \$50 week representing Clows' Famous Philadelphia Hosiery, direct from mill—for men, women, children. Every pair guaranteed. Prices that win. Free book "How to Start" tells the story. George Clows Company, Desk 24, Philadelphia, Pennsylvania.

\$10 WORTH of finest toilet soaps, perfumes, toilet waters, spices, etc., absolutely free to agents on our refund plan. Lacasani Co., Dept. 615, St. Louis, Missouri.

EARN \$2.00 an hour in your spare time taking subscriptions for this magazine. Write to-day for the agency in your town. Popular Science Monthly, 225 West 39th Street, New York.

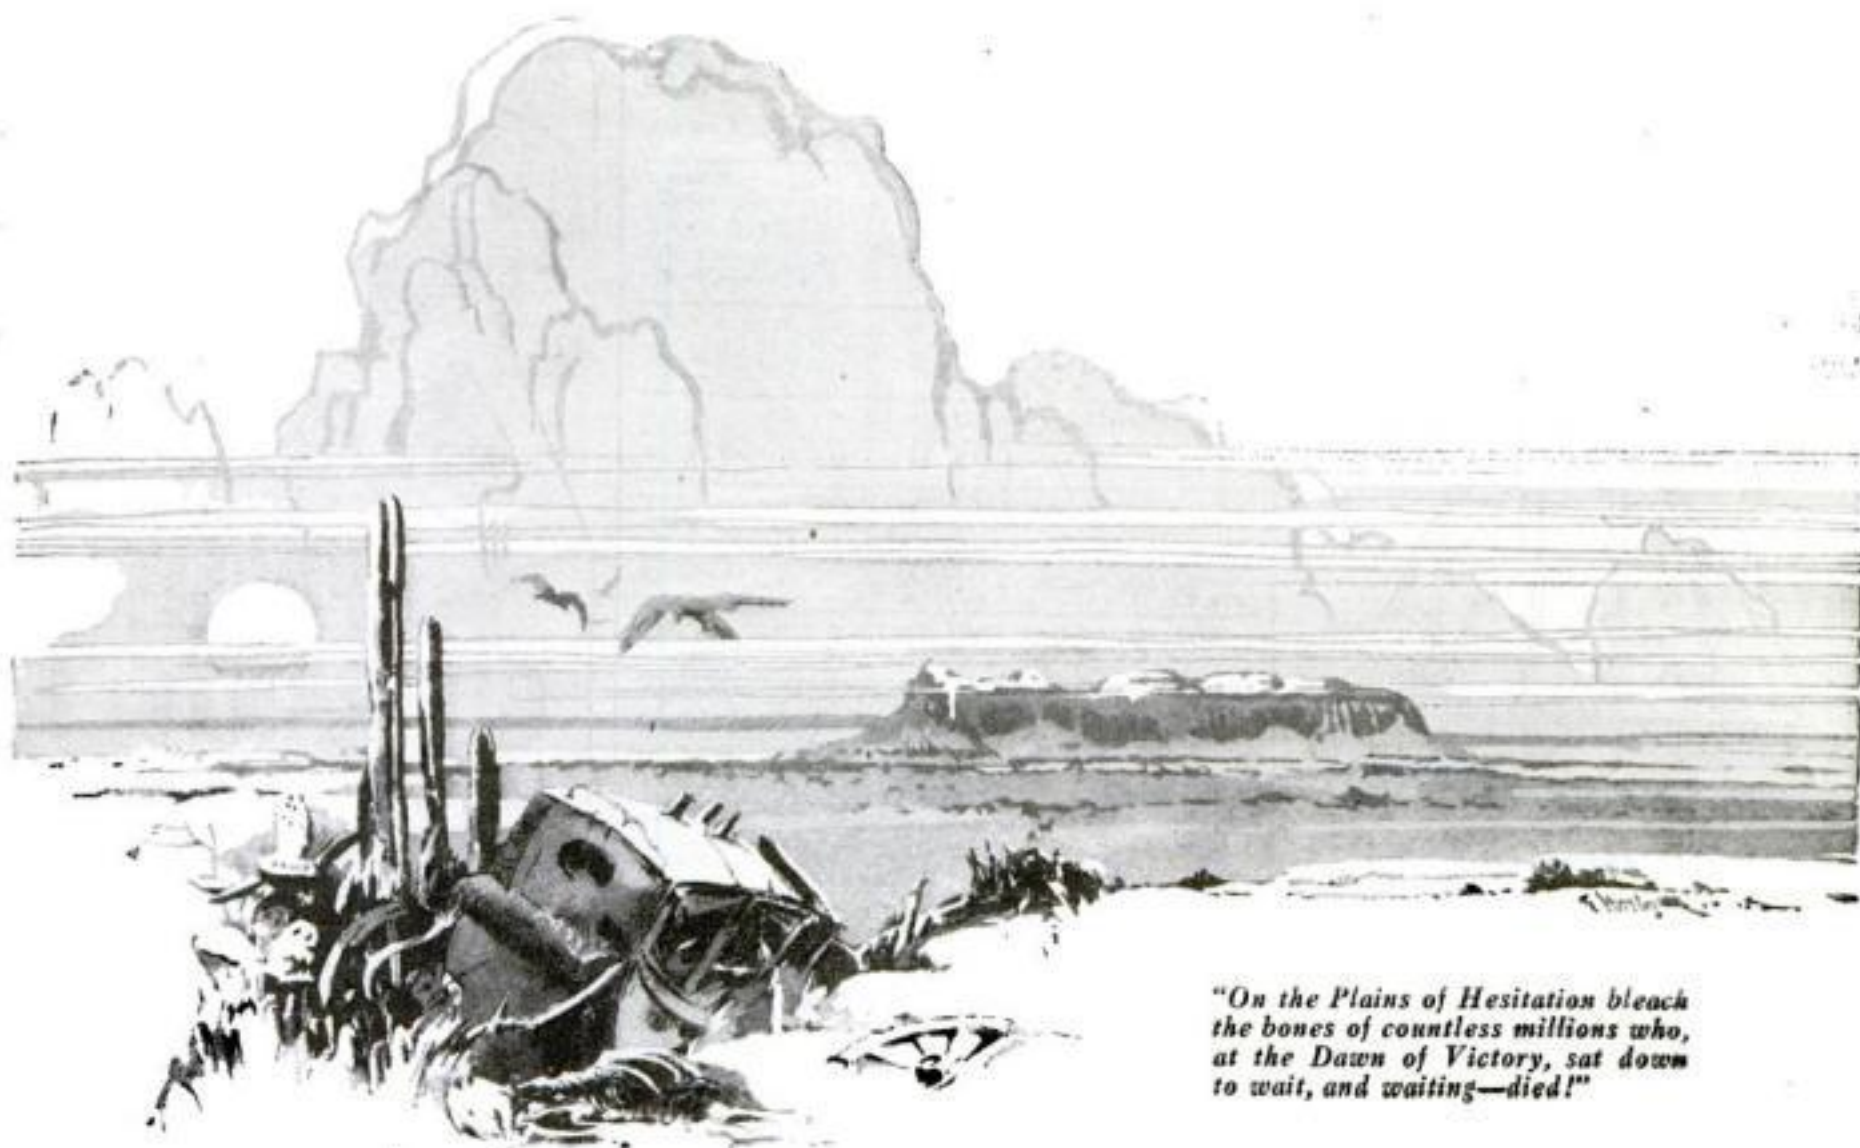

"On the Plains of Hesitation bleach the bones of countless millions who, at the Dawn of Victory, sat down to wait, and waiting—died!"

The Warning of the Desert

By William A. Lawrence

THIS is the story of Bill Andrews—"Plain" Bill Andrews. The nickname had been coined by some boyhood chum and it had stuck through the years. It was both deserved and descriptive. For Bill was plain in appearance—plain in dress—plain in conversation—plain in everything he did.

Bill was twenty-seven when I first got to know him well—married—the father of as fine a boy as you have ever seen.

Bill might have been a little further along in the world if he had had just a little more luck—or foresight—when he started. But like thousands of other men he had been forced to leave school and go to work while he was still young, and he had taken the first thing that came along.

He worked as hard as he knew how, but somehow or other he never seemed to get very far.

It was hard—terribly hard, sometimes—to make both ends meet—particularly when sickness came or there were other unexpected expenses. But Bill never gave up hope. You see, he had some "plain," old-fashioned courage, too.

Above everything else in the world, he wanted to go home some night and tell his wife of a raise in salary—of a promotion that would mean a happier, better home.

I wonder if there is a man anywhere who doesn't have that same ambition—that same hope!

But that increase in salary and that promotion never came. Indeed, once or twice, when things were slack, Bill came mighty near losing his job.

Then, one night Bill came across an advertisement that was to change his entire life. It told how other men just like himself had found a way to get out of the rut and make good in a big way—how every man has enough natural ability to

make a success in some line of work if he will only find that work and study it.

There was nothing particularly new about the thought—it was something Bill had known and realized for years.

AS a matter of fact, Bill had seen that advertisement and that familiar coupon many, many times before. For two years he had been promising himself that he would cut it out and send it to Scranton. He knew that he ought to do it—that he should at least find out what the I. C. S. could do for him. But he never had!

And he might not have sent it this time, either, but for a few heart-stirring lines under a picture which he had seen called "The Warning of the Desert":

"On the Plains of Hesitation bleach the bones of countless millions who, at the Dawn of Victory, sat down to wait, and waiting—died!"

Bill read that over two or three times. "The Plains of Hesitation!" "Countless millions who, at the Dawn of Victory, sat down to wait, and waiting—died!" These two phrases kept ringing in his ears. They worked their way into his very soul.

"That settles it," said Bill, with a finality that was unusual for him. "I'm tired waiting—I'm tired putting it off. This is my chance to get out of the rut, and I'm not going to overlook it again."

So that night Bill Andrews clipped the coupon he had seen so often—marked it—and mailed it to Scranton.

BILL told me the other day that he was surprised how interested he became in his lessons—of the personal interest the teachers at the I. C. S. took in him—how his employers learned about his studying and kept moving him up and up as fast as he was ready.

Bill is manager of his department now, and they tell me he's going to be a member of the firm some day. He certainly is a shining example of what any man with ambition can do if he only makes the start.

If the International Correspondence Schools can raise the salaries of men like Bill Andrews, they can raise yours. If these Scranton schools can help men like Bill Andrews to win the advancement that means a happier, better home, they can help you, too.

Believe me when I tell you that the most important thing you can do to-day is to send in that I. C. S. coupon. It is far better to send it in now than to wait a year—or five years—and then realize what the delay has cost you. Do it now!

INTERNATIONAL CORRESPONDENCE SCHOOLS Box 7629-C, Scranton, Penna.

Without cost or obligation on my part, please tell me how I can qualify for the position or in the subject before which I have marked an X:

BUSINESS TRAINING DEPARTMENT

- | | |
|---|---|
| <input type="checkbox"/> Business Management | <input type="checkbox"/> Salesmanship |
| <input type="checkbox"/> Industrial Management | <input type="checkbox"/> Advertising |
| <input type="checkbox"/> Personnel Organization | <input type="checkbox"/> Better Letters |
| <input type="checkbox"/> Traffic Management | <input type="checkbox"/> Foreign Trade |
| <input type="checkbox"/> Business Law | <input type="checkbox"/> Stenography and Typing |
| <input type="checkbox"/> Banking and Banking Law | <input type="checkbox"/> Business English |
| <input type="checkbox"/> Accountancy (including C.P.A.) | <input type="checkbox"/> Civil Service |
| <input type="checkbox"/> Nicholson Cost Accounting | <input type="checkbox"/> Railway Mail Clerk |
| <input type="checkbox"/> Bookkeeping | <input type="checkbox"/> Common School Subjects |
| <input type="checkbox"/> Private Secretary | <input type="checkbox"/> High School Subjects |
| <input type="checkbox"/> Business Spanish | <input type="checkbox"/> Illustrating |
| <input type="checkbox"/> French | |

TECHNICAL AND INDUSTRIAL DEPARTMENT

- | | |
|---|--|
| <input type="checkbox"/> Electrical Engineering | <input type="checkbox"/> Architect |
| <input type="checkbox"/> Electric Lighting | <input type="checkbox"/> Blue Print Reading |
| <input type="checkbox"/> Mechanical Engineer | <input type="checkbox"/> Contractor and Builder |
| <input type="checkbox"/> Mechanical Draftsman | <input type="checkbox"/> Architectural Draftsman |
| <input type="checkbox"/> Machine Shop Practice | <input type="checkbox"/> Concrete Builder |
| <input type="checkbox"/> Railroad Positions | <input type="checkbox"/> Structural Engineer |
| <input type="checkbox"/> Gas Engine Operating | <input type="checkbox"/> Chemistry |
| <input type="checkbox"/> Civil Engineer | <input type="checkbox"/> Automobile Work |
| <input type="checkbox"/> Surveying and Mapping | <input type="checkbox"/> Airplane Engines |
| <input type="checkbox"/> Metallurgy | <input type="checkbox"/> Agriculture and Poultry |
| <input type="checkbox"/> Steam Engineering | <input type="checkbox"/> Mathematics |
| <input type="checkbox"/> Radio | |

Name.....
Street Address.....
City..... State.....
Occupation.....
Persons residing in Canada should send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada.

Listen

To Me!



Electrical Experts

Earn \$70 to \$200 a Week

Electrical experts are in great demand everywhere. This is the great electrical age and Electric power is moving the world. I can train any ambitious man to become a Certified Electrical Expert in a short time and able to fill a fine paying position. I can do this regardless of what kind of work you are doing now and how little education you may have. High school or college training unnecessary.

I Will Train You at Home in Your Spare Time

I am Chief Engineer of the great Chicago Engineering Works and know just the kind of practical up-to-date training you need to hold the best Electrical positions. I will train you at home by my wonderful lessons and Electrical apparatus that I will send you free.

Satisfaction Guaranteed

I have trained hundreds of Electrical Experts and can do the same for you. So sure am I of this that I guarantee under bond to return every cent you pay for my course if you do not succeed. A million dollar institution stands behind this guarantee.

FREE! Big Outfit of Electrical Tools and Material

This fine outfit includes instruments, tools and material for practical work—it is absolutely free. While they last I am giving every student who enrolls for my course one of these great outfits. Write now—today.

Mail Coupon Send today for proof lessons, my big wonderful Electrical Book, and the "Vital Facts" of the Electrical Industry—BOTH FREE—Send coupon or postal.

L. L. COOKE, CHIEF ENGINEER
Chicago Engineering Works, Dept. 33
2150 Lawrence Ave. Chicago, Illinois

Use this Free Outfit Coupon!

CHIEF ENGINEER COOKE, Chicago Engineering Works
Dept. 33, 2150 Lawrence Ave., Chicago, Ill.

Please send me Absolutely Free your book, "How to Become an Electrical Expert," Free Outfit Offer, Vital Facts and Sample Lessons. No obligation.

Name.....
Address.....
City and State.....
Occupation..... Age.....

Money Making Opportunities

AGENTS AND SALESMEN WANTED

\$50-\$200 week. Free samples gold letters for store windows. Easily applied. Liberal offer to general agents. Metallic Letter Co., 434 North Clark, Chicago.

\$5 to \$15 daily easy—introducing new style guaranteed hosiery. Must wear or replaced free. No capital or experience required. Just show samples, write orders. Your pay in advance. We deliver and collect. Elegant outfit furnished, all colors and grades, including silks, lisle and heathers. Mac-O-Chee Mills Co., Desk 1523, Cincinnati, Ohio.

AGENTS wanted—Big money maker. Sells to Ford owners on simple demonstration. Gives 20% to 50% more miles. New and patented. Write Marvel Gas Saver Co., Dept. B, Rockford, Illinois.

AGENTS—Latest novelty powder puff powder in puff self feeder. Sample mailed, 35c, also sample latest pocket pencil sharpener, mailed 25c. Voigt Novelty, West Frankfort, Illinois.

AGENTS with Fords, \$20.00 daily. Water circulating pumps, \$4.00, retails \$10.00. Shock absorbers and snubber \$3.50, retails \$8.50. Nickel Byflex Bumper, \$5.50, retails \$12.00. Explosive whistle, \$2.00, retails \$4.50. All guaranteed. Enclose money order for any item. Universal Mfg. Co., 1110 Michigan, Chicago.

BIG profits. New \$3.50 automatic adding machine. Wonderful seller. No competition. Bassett Company, 1458-P Hollywood Ave., Chicago.

CLOTHING salesmen—Sell direct to consumer, strongest line of \$15 to \$25 men's and young men's suits and top coats; no little sample-book proposition, but strongest line on market condensed into easy-to-carry form; liberal commissions. Write stating experience, age. Meyers Bros., Inc., 2211 Market Street, Philadelphia, Pennsylvania.

AMATEUR agents wanted to sell high class radio sets and parts. Splendid proposition. Liberal commission. Catalog free. Columbia Radio Corp., 2761 Diversey Ave., Chicago, Illinois.

SELL nuts by mail. We supply you. Send 25c for sample and particulars. Nectar Nut Co., Cranbury, Texas.

AGENTS: \$1.25 an hour, \$8.50 a day. Light, easy work near home showing samples, distributing foods. Big assortment full sized packages free. Write quick. Dept. 77, Harley Company, Dayton, Ohio.

AGENTS, Big Profits, selling Wubrub Polish for furniture, woodwork, automobiles, etc. Cleans and polishes. Write for Big Free Offer. Fritch's Laboratories, 312-E North Carpenter, Chicago.

REPRESENTATIVES wanted. Exclusive territory. Borel Lock Limited, Sorel, Quebec, Canada.

WE sell hosiery to agents, mill prices. Box 453, Norris-town, Pennsylvania.

AMBITIOUS men, write today for attractive proposition, selling subscriptions to America's most popular automobile and sportsman's magazine. Quick sales. Big profits. Pleasant work. Digest Pub. Co., 9523 Butler Bldg., Cincinnati.

AGENTS—Best seller; Jem Rubber Repair for tires and tubes; supersedes vulcanization at a saving of over 800 per cent; put it on cold, it vulcanizes itself in two minutes, and is guaranteed to last the life of the tire or tube; sells to every auto owner and accessory dealer. For particulars how to make big money and free sample, address Amazon Rubber Co., 504 Amazon Building, Philadelphia, Pennsylvania.

WANTED—District Purchasing Agents, \$250 per month. Steady employment and exclusive territory. Write now. Experience unnecessary. National Instrument Company, 4707 North Hamilton, Chicago, Illinois.

SELL necessities. Everybody needs and buys the "Business Guide." Bryant cleared \$800 in July. Send for sample. It's free. Nichols Company, Box 1B, Naperville, Illinois.

AGENTS—Something new, think of it! 33c profit on every 35c sale. What is it? Sample free. Empire Company, 7201 Atlantic, Ventnor, Atlantic City, New Jersey.

WHY work for others? Make and sell your own goods. We show you how. Enormous profits. Write quick for free book explaining everything. National Scientific Laboratories, 213 North Monroe, Richmond, Virginia.

AGENTS—62% Profit—Salesmen. New Article. Big demand. Business and professional men must have it. \$25.00 to \$50.00 upwards daily. Ellen, Ohio, books 14 orders out of 16 calls in 3 hours, profit, \$95.00. Men capable of handling one or more states desired but not absolutely necessary. Write at once stating territory desired. Sample Free. Business Builders, Dept. 110, Athens, N. Y.

AGENTS: If you are making less than \$300 a month, our proposition on Sentinel Burglar Alarms for windows and doors will interest you. Many agents earn \$20 daily. Brand new inventions. No wires or batteries. Instantly attached to any door or window. No competition. Provides cheap burglar insurance. Big money makers. Write to-day for extremely liberal terms to agents. Sentinel Alarm Co., 1462 Marquette Bldg., Chicago, Illinois.

27,000 records guaranteed with one Everplay Phonograph Needle; new, different, cannot injure records. \$10.00 daily easy. Free sample to workers. Everplay, Desk 215, McClurg Bldg., Chicago.

FREE sample. "Rain shield wiper." Retails \$1, costs 25c (300% profit). Just invented. Sold on clear and rainy days. Automobiles buy quickly. No cloth—no paste—no attachment. 1 rub keeps windshield clear 48 hours. Riley made \$108 three days. Experience unnecessary. Wonderful sideline. Nullife (V) Corporation, Hartford, Connecticut.

BIG money and fast sales. Every owner buys gold initials for his auto. You charge \$1.50; make \$1.35. Ten orders daily easy. Write for particulars and free samples. American Monogram Co., Dept. 47, East Orange, New Jersey.


WE receive \$20 to \$70 weekly copying and selling names. Home employment. Send 20c coin for instruction, supplies. Reference Highland County Bank. Satisfaction or 20c returned. C. H. Davis & Son, News Agency, 614 Jefferson, Greenfield, Ohio.

LARGE shirt manufacturer wants agents to sell complete line of shirts direct to wearer. Exclusive patterns. Big values. Free samples. Madison Mills, 503 Broadway, New York.

MR. ADVERTISER: Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Manager Classified Advertising, Popular Science Monthly, 225 West 39th Street, New York.

MAN in each town to refinish chandeliers, brass beds, automobiles, by new method. Outfit furnished. \$10 daily without capital or experience. Write Gunmetal Company, Avenue "F," Decatur, Illinois.

BE A RAILWAY TRAFFIC INSPECTOR

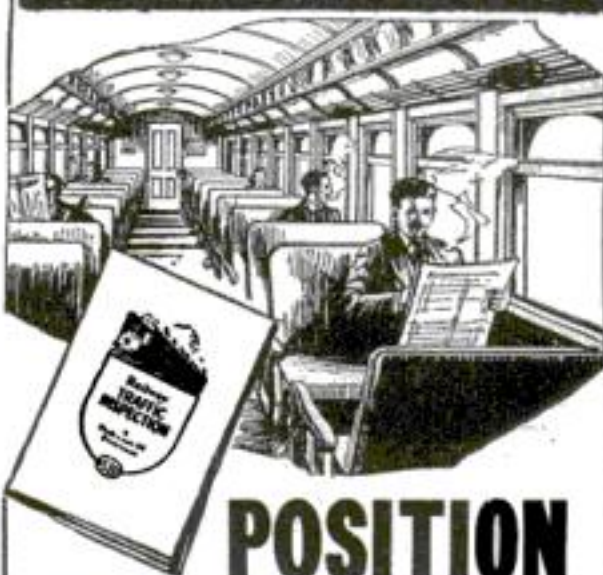

POSITION GUARANTEED

Earn Up to \$250.00 per Month
EXPENSES PAID

Many fine opportunities for trained Railway Traffic Inspectors. Steady, pleasant outdoor work; travel or remain at home.

Easy to Qualify

Prepare in three months' spare-time study at home. Position then guaranteed at not less than \$110 per month and expenses, with many chances for advancement thru contact with big railway officials.

"My Experience—Most Gratifying"

Read what Mr. Leo Manning says:



"Words are inadequate to express the deep sense of appreciation for the many favors and acts of kindness extended by you during my training period. It is needless to say that I am proud of my diploma and shall consider it one of my most valued possessions."

"My experience with the Standard Business Training Inst., has been most gratifying and absolutely satisfactory in every respect. The treatment and cooperation received from the faculty members is all that it should be to conduct a proper appreciation among the students of its policy and intent. Any success I shall have with this work can be largely attributed to the knowledge secured from your course."

GUARANTEE

Our guarantee states that tuition will be refunded to you if, upon graduation, position is not obtained, paying at least \$110 per month and expenses.

work can be largely attributed to the knowledge secured from your course."

You Take No Risk

Read our Guarantee Notice. If position is not obtained for you, entire enrollment fee is refunded without question. You have nothing to lose.

Send coupon for details and booklet No. D-984.

Standard Business Training Inst.,
Buffalo, N. Y.

----- MAIL TODAY -----
Standard Business Training Inst.,
Buffalo, N. Y.

Send me, entirely free, Booklet No. D-984 giving full particulars about course in Railway Traffic Inspection.

Name.....
Street.....
City.....

THE DANGER OF NERVE EXHAUSTION

By PAUL von BOECKMANN

The high pressure, mile-a-minute life of to-day, with its mental strain, worry, anxiety, grief and trouble, is **WRECKING THE NERVES** of mankind. This applies especially to the people with highly active brains and sensitive nerves. Have your Nerves stood the strain?

The symptoms of nerve exhaustion vary according to individual characteristics, but the development is usually as follows:

First Stage: Lack of energy and endurance; that "tired feeling."

Second Stage: Nervousness, restlessness, sleeplessness; irritability, decline in sex force; loss of hair; nervous indigestion, sour stomach; gas in bowels; constipation; irregular heart; poor memory; lack of mental endurance; dizziness; headache; backache; neuritis, rheumatism, and other pains.

Third Stage: Serious mental disturbances; fear; undue worry; melancholia; dangerous organic disturbances; suicidal tendencies; and in extreme cases, insanity.

If only a few of the symptoms mentioned apply to you, especially those indicating mental turmoil, you may be sure your nerves are at fault—that you have exhausted your Nerve Force. It is positive your nerves are at fault, if you feel generally depressed, tired and ailing, though repeated medical examinations fail to show definitely some organ is involved. In such cases the decline in organic power is due to subnormal nerve power.

I agree with the noted British authority on the nerves, Arthur T. Schofield, M. D., the author of numerous works on the subject, who states: "It is my belief that the greatest single factor in the maintenance of health is that the nerves be in order."

Submit your case to me, and I shall tell you definitely the exact nature of your weakness, and whether I can help **YOU**, as I have helped over 90,000 men and women during the last thirty years.

I am a Nerve Specialist and Psychoanalyst, besides being generally experienced in all sciences pertaining to the Body and Mind. I have treated more cases of "Nerves" than any other man in the world. My instruction is given by Mail only. No drugs or drastic treatment are employed. My method is remarkably simple, thoroughly scientific and invariably effective.

Positively no fee is charged for a "Preliminary Diagnosis" of your case, and you will be under no obligation to take my course of instruction, unless you wish to do so. Do not explain your case in your first letter, as I shall send you *special instructions* on how to report your case and how to make certain "nerve tests" used generally by Nerve Specialists. I shall also send you **FREE**, other important data on the subject which will give you an understanding of your nerves you never had before.

I have studied the health problem for more than 30 years

from every angle. Far over a million of my various books on Health subjects have been sold all over the world during this time, and as a result about 300,000 people have written me in detail describing their weaknesses and experiences with different methods of treatment they applied. I am more convinced to-day, than ever before in my life, that nerve weakness (**Neurasthenia**), is the basic cause of nearly every ailment of civilized man and woman. Other weaknesses are simply the **result** of weak nerves. I have learned further, that worry, grief, anxiety, mental strain and of course, sex abuse, are the basic cause of nerve weakness.

I ask **YOU**, how can we

reason otherwise? Is not the Nervous System the great governing force of the body, the force that gives Life and Power to every organ, every muscle and cell? When the Nervous Forces are depleted through strain, how can the vital organs, muscles and other tissues retain their power? **It is impossible.**

The power of the nerves is infinitely great for good or evil. So great is this power that a tremendous nerve strain, as for instance, intense fear or anger, may cause instant death through bursting of a blood vessel. A less intense nerve shock will cause the cheeks to pale or become flushed with blood. It can make the heart beat wildly and paralyze breathing. It can make cold sweat break out over the body, and make the knees tremble and become weak. It can paralyze the digestive powers in an instant. Long extended nerve strains of even mild intensity will undermine the mind and body of the **strongest man or woman that ever lived.**

Nerve force is a dangerous power when uncontrolled. If controlled, it can be made to give us Strength, Health, Character, Personality, Success and Happiness. **It is the greatest force of all bodily forces.** My life's work consists of teaching how to control the nerves and attain through them all that life can give.

My success has been phenomenal. If you will write me, you will receive authentic records of cases of Nerve Exhaustion I have corrected, which have never been equalled in the history of medical practice.

You should read my book on this subject, entitled **Nerve Force**. If you do not agree that it is the most instructive book you have ever read, return it and your money will be refunded plus your outlay of postage. The cost, prepaid, is 25 cents (coin or stamps preferred). I have advertised my books and courses of instruction in this magazine for more than 20 years, which is ample guarantee of my responsibility and integrity.



PAUL VON BOECKMANN

Author of *Nerve Force* and scores of other books on Health, Psychology, Breathing, Hygiene and kindred subjects. Over a million of his various books have been sold during the last 25 years.

Prof. von Boeckmann is the scientist who explained the nature of the mysterious Psychophysic Force involved in the Coulton-Abbott Feats, a problem that had baffled the leading scientists of America and Europe for more than thirty years, and a full account of which has been published in recent issues of *Physical Culture Magazine*.

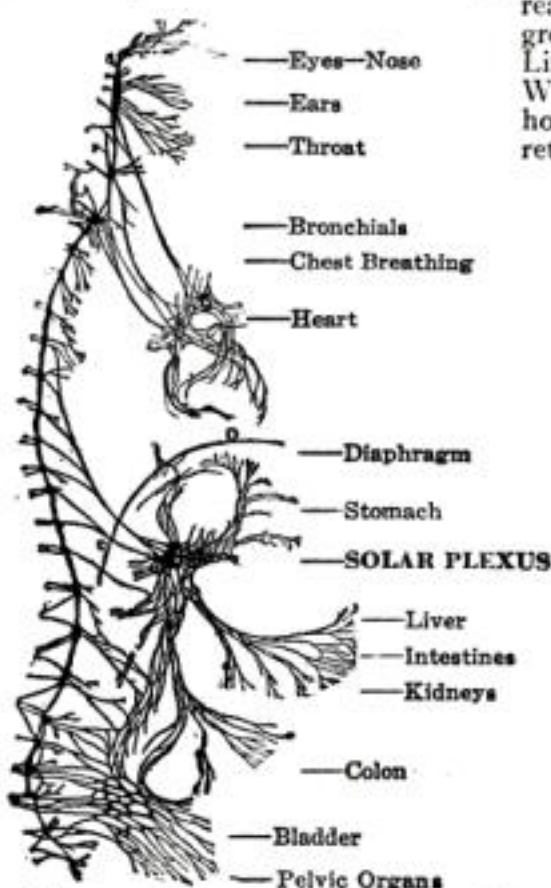


Diagram showing the location of the Solar Plexus, known as the "abdominal brain," the great center of the Sympathetic (Internal) Nervous System. Mental strains, especially grief, fear, worry and anxiety, paralyze the Solar Plexus, which in turn causes poor blood circulation, shallow breathing, indigestion, constipation, etc. This in turn clogs the blood with poisons that weaken and irritate the nerves. Thus mental strain starts a cycle of evils that cause endless misery, aches, pains, illnesses, weaknesses and generally lower mental and physical efficiency.

PAUL von BOECKMANN

110 West 40th Street, Studio 169, New York, N. Y.

Dear Sir: I desire to investigate your method, without obligation of any kind. (Print name and address plainly.)

Name.....

Address.....

Enclose 25c. if you wish the book

Your Choice 75c a Week



No matter what your occupation, one of the home study sets listed below will quickly fit you for a better job and bigger pay. Any set you select will be sent for seven days' examination, and if you decide to buy you may pay the rock-bottom price at the rate of **only 75c a week**. But you must act now! The rising cost of paper and binding materials won't permit us to continue the present low prices much longer.

These books are the work of recognized authorities. They are written in plain, easily understood language, by recognized authorities, and contain hundreds of photographs, diagrams, tables, etc., that make difficult points as simple as A-B-C. Handsomely and durably bound in half or full morocco leather (except as noted), and stamped in gold.

Pay-Raising Books At Greatly Reduced Prices

Business Management, 8 volumes, 2500 pages, well illustrated. Was \$52.50.	Now \$29.80
Carpentry and Contracting, 5 volumes, 2138 pages, 1000 pictures. Was \$37.50.	Now 19.80
Civil Engineering, 9 volumes, 3900 pages, 3000 pictures. Was \$67.50.	Now 34.80
Electrical Engineering, 8 volumes, 3800 pages, 2600 pictures. Was \$60.00.	Now 29.80
Automobile Engineering, 6 volumes, 2600 pages, 2000 pictures. Was \$45.00.	Now 21.80
Machine Shop Practice, 6 volumes, 2300 pages, 2500 pictures. Was \$45.00.	Now 21.80
Steam and Gas Engineering, 7 volumes, 3300 pages, 2500 pictures. Was \$52.50.	Now 24.80
Law and Practice (with reading course), 13 volumes, 6000 pages, illustrated. Was \$97.50.	Now 49.80
Fire Prevention and Insurance, 4 volumes, 1500 pages, 600 pictures. Was \$30.00.	Now 14.80
Telephony and Telegraphy, 4 volumes, 1728 pages, 2000 pictures. Was \$30.00.	Now 14.80
Sanitation, Heating and Ventilating, 4 volumes, 1454 pages, 1400 pictures. Was \$30.00.	Now 14.80
Drawing, 4 volumes, 1578 pages, 1000 pictures, blue prints, etc. Was \$30.00.	Now 14.80

Send No Money Shipped for 7 days' Trial

Yes, we'll gladly ship any set right to your home or office upon your simple request. Pay only shipping charges when the books arrive. Don't send a penny until after you have used them seven days, then remit only \$2.80 or return them at our expense. Pay balance at the rate of \$3.00 a month—**75c a week**.

Act now—while these splendid books are being offered at 20% to 50% less than regular prices. This offer is open to every person within the boundaries of the U. S. and Canada. Grasp your opportunity—fill in and mail the coupon now.

American Technical Society, Dept. X-203, Chicago

American Technical Society, Dept. X-203, Chicago, U. S. A.

Please send me set of.....

for 7 days' examination, shipping charges collect. I will examine the books thoroughly and, if satisfied, will send \$2.80 within 7 days and \$3.00 each month, until I have paid the special price of.....

If I decide not to keep the books, I will notify you at once and hold them subject to your order. Title not to pass to me until the set is fully paid for.

Name.....

Add

Employed by.....

Money Making Opportunities

AGENTS AND SALESMEN WANTED

MAKE \$31.00 profit with only \$1.50, selling gold leaf monograms for automobiles, trunks, bags, window and wagon letters. Applied instantly. Experience unnecessary. Outfit brings \$32.50—costs \$1.50—you make \$31.00 profit. Free samples (36 designs). NuLife Auto (B) Aid, Hartford, Connecticut.

"DENGEMO" vibrating portraits, increase your profits. Year around. 50c postpaid. Tecart Studio, 335, Station C, Los Angeles, California.

MAKE big money selling delicious puddings, polishing cloth, stain remover, 100 other tiptop sellers. Equipment, free. Write Newton Co., 14 Main, Newark, New York.

EASY, pleasant work for mechanics, shop men, clerks during spare hours, will add many dollars to their salaries. Also want persons who can give full time. Big wages assured. Novelty Cutlery Company, 27 Bar Street, Canton, Ohio.

ONLY one sale a day means \$200 per month! Five sales \$1,000 per month. Marvelous new adding machine. Retail \$15.00. Work equals \$350 machine. Adds, subtracts, multiplies, divides automatically. Speedy, accurate, durable, handsome. Five year guarantee. Offices, stores, factories, garages buy one to dozen. A fortune for live agents. Write quick for protected territory and free trial offer. Lightning Calculator Co., Dept. P, Grand Rapids, Michigan.

AGENTS—A demonstration sells our marvel can opener and doubles your money. Clinca your success with our proposition. Staples Mfg. Co., Box 288, Mt. Vernon, Indiana.

SCHEMER Magazine, Alliance, Ohio, prints big profit schemes; one agent making \$25,000 from three; another \$10,000 from one. Try your luck. Year, only \$1.00; 3 months, 25c.

GET our plan for monogramming automobiles, trucks, hand luggage and all similar articles by transfer method; experience unnecessary; exceptional profits. Motorists' Accessories Company, Mansfield, Ohio.

HELP WANTED

OUR genuine gold window sign letters are an excellent money-making proposition for handy men. Slann Sign System, East Bethune Avenue, Detroit, Michigan.

MEN—Age 17 to 45. Experience unnecessary. Travel, make secret investigations, reports. Salaries, expense. American Foreign Detective Agency, 321, St. Louis.

SILVERING mirrors, French plate. Easily learned, immense profits. Plans free. Wear Mirror Works, Dept. 26, Excelsior Springs, Missouri.

WRITE photoplays; \$50 each. Experience unnecessary, details free to beginners. Producers' League, 194, St. Louis.

DETECTIVES—Excellent opportunity. Fascinating work. Experience unnecessary. Particulars free. Write, American Detective System, 1908 Broadway, New York.

BE a detective. Excellent opportunity, good pay, travel; Write C. T. Ludwig, 424 Westover Bldg., Kansas City, Missouri.

RUMMAGE sales make \$50.00 daily. We start you. Representatives wanted everywhere. "Wholesale Distributors," Dept. 31, 609 Division Street, Chicago.

MR. ADVERTISER: Ask today for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Manager Classified Advertising, Popular Science Monthly, 225 West 39th Street, New York.

WANTED—Ambitious men to work at home. Entirely new business; local or mail order. Previous experience essential. Ordinary man made \$15 day. Write immediately. Kraft, Box 896-P8, San Francisco, California.

BE a railway traffic inspector! \$110 to \$250 monthly, expenses paid, after 3 months' spare-time study. Splendid opportunities. Position guaranteed or money refunded. Write for Free Booklet C-13. Standard Business Training Institute, Buffalo, New York.

MEN—Will you increase your earnings? Work at home evenings? Then write enclosing stamped addressed envelope. Normande H, 147 W. 23d Street, New York.

MEN, women, over 18, securing Government positions \$1400 up, write immediately for full information. Chicago Civil Service College, B-70 Kesner Building, Chicago.

EARN \$10 daily silvering mirrors, plating and refinishing metalware, headlights, chandeliers, bedsteads. Outfits furnished. F. Deele Laboratories, 1133 Broadway, New York.

STOP daily grind. Start silvering mirrors, auto headlights, tableware, etc. Plans free. Clarence Sprinkle, Dept. 95, Marion, Indiana.

AMBITIOUS men, write today for attractive proposition, selling subscriptions to America's most popular automobile and sportsman's magazine. Quick sales. Big profits. Pleasant work. Digest Pub. Co., 9523 Butler Bldg., Cincinnati.

GOVERNMENT railway mail clerks start \$133 month; expenses paid. Specimen examination questions free. Columbus Institute, N-2, Columbus, Ohio.

ALL men, women, boys, girls, 17 to 60, willing to accept government positions, \$117-\$190, traveling or stationary, write Mr. Osment, 295 St. Louis, immediately.

MEN—18 to 35. Become railway mail clerks. \$133 month. Particulars free. Write. Franklin Institute, Dept. N42, Rochester, N. Y.

FIREMEN, brakemen, baggage men, sleeping car, train porters (colored). \$140-\$200. Experience unnecessary. 838 Railway Bureau, East St. Louis, Illinois.

EARN \$15-\$50 weekly writing show cards. No canvassing. Experience unnecessary. We train you. Particulars, terms free. Sho-Rite Sign System, Inc., 2352, Detroit, Michigan.

BE a finger print expert. Learn on easy payment plan. Write. Vigilant Identification Co., Mt. Vernon, Illinois.

HOTELS need trained men and women. Nation-wide demand for high-salaried men and women. Past experience unnecessary. We train you by mail and put you in touch with big opportunities. Big pay, fine living, interesting work, quick advancement, permanent. Write for Free Book "Your Big Opportunity." Lewis Hotel Training Schools, Suite 2742, Washington, D. C.

HELP WANTED

HIGH grade manufacturer seeks tools or metal specialties to make. Will purchase patents, or manufacture on contract or royalty. F. V. Bogart, 715 Park Ave., Rockford, Illinois.

Are you a Square Peg in a Round Hole?



Are you just marking time, getting little satisfaction out of your job, not developing yourself or rising in power?

You needn't keep on being a misfit. There's a sure way to solve your problem. Prepare for something definite and the world will give you the opportunity.

Use some of your spare evening hours—seven to ten—as thousands of young men all over the country are doing right now, under our direction. Enroll for one of our practical correspondence courses and get our close personal service, which gives you "the most for the least money."

Employers everywhere are favoring the man who is studying ahead of his job. Write us about your ambition, or mark and mail the coupon below, and get our friendly counsel free. We can help you to prepare for a real turning point in your career.

Some of our 300 Correspondence Courses

Business Courses	Technical and Other Courses
Accountancy	Agricultural Courses
Advertising	Applied Psychology
Banking	Architecture
Better Letters	Automobile Courses
Bookkeeping	Building Construction
Business Arithmetic	Civil Engineering Courses
Business Administration	Drafting Courses
Business English	Electrical Courses
Business Finance	English Courses
	Factory Management
	Foreign Languages
	Foremanship
	Highway Engineering
	High School Courses
	Illustrating
Business Law	Insurance Courses
Complete Letter-Writing	Mathematical Courses
Office Management	Mechanical Engineering
Public Speaking	Own-Your-Home Courses
Salesmanship	Plan Reading
Secretarial	Plumbing
Show Card Writing	Poultry Husbandry
Stenography	Radio Engineering
Traffic Management	Radio Telegraphy
	Steam Engineering Course
	Structural Drafting
	Surveying
	Use of the Slide Rule
	Vocational Guidance
	Are you an ex-service man?



**Correspondence
Instruction**
347 Madison Avenue
New York City

Without obligating me, please advise regarding the course in

Name.....

Full Address.....
(Please write plainly.)

Fill a Big Job

**\$150 to \$500 a month in
Auto and Tractor Business**

Qualify in 8 weeks in the great shops of Rahe for high paying positions. Through my training Louis Beimer was made Foreman at the age of 24. Hundreds of others have done as well or better.

Big Jobs Open—I get calls every day from Garages, Battery Stations, Auto Repair, Welding Shops and other successful firms, for Rahe men. Big concerns need trained men right away and they know where to look for them.

Railroad Fare and Board FREE

In order to fill these openings at once I am making an offer no one has ever made before. I cannot hold this open long. I'll tell you about it in my letter. Send for details and Big Free Book on Auto Business. Write before it's too late.

RAHE AUTO & TRACTOR SCHOOL Dept. 2377
4445 Grand Blvd. 9th and Western
CHICAGO, ILL. CINCINNATI, O.

Money Making Opportunities

BUSINESS OPPORTUNITIES

USED correspondence courses sold, rented, and exchanged. List free. (Courses bought.) Lee Mountain, Pisgah, Alabama.

ADVERTISE. Country, town newspapers. Lists free. Fennell Company, Covington, Kentucky.

RESPONSIBLE corporation wants general sales managers to open branch office, manage salesmen. \$500 to \$1000 necessary; expenses allowed to Baltimore if you qualify. Address Manager, 603 N. Eutaw Street, Baltimore, Maryland.

EXPERT chemist will furnish formula and Trade Secrets in all lines. Lists free. W. L. Cummings, Ph. D., Gordon Avenue, Syracuse, New York.

ENTER a new business. Earn \$3,000 to \$6,000 yearly in professional fees making and fitting a foot specialty; openings everywhere with all the trade you can attend to; easily learned by any one at home in a few weeks, at small expense; no further capital required; no goods to buy, job hunting, soliciting or agency. Address Stephenson Laboratory, 15 Back Bay, Boston, Massachusetts.

WE start in business, furnishing everything. Men and women, \$30.00 to \$100.00 weekly, operating our "New System Specialty Candy Factories" anywhere. Opportunity lifetime. Booklet free. H. Ragsdale Company, East Orange, New Jersey.

SELL by mail. Big profit opportunities free. Harvey Teeple, Decatur, Indiana.

GET into the specialty manufacturing business. Amazing profits. We will send you free book explaining our system. Write immediately. A wonderful opportunity awaits you. National Scientific Laboratories, 213 North Monroe, Richmond, Virginia.

PATENTS procured—Trade marks registered—A comprehensive, experienced, prompt service for the protection and development of your ideas. Preliminary advice gladly furnished without charge. Booklet of information and form for disclosing idea free on request. Richard B. Owen, 44 Owen Building, Washington, D. C., or 2276-Z Woolworth Building, New York.

\$400 CLEAR each day, anybody can do that with Our Equipment, canvassing and experience unnecessary, send \$30 in silver with Reference for particulars. Triple Block Motor Works, Garfield, Washington.

MAKE money with your camera. E. Lancaster, Box 967, Los Angeles.

FIFTY "Ideal" sidelines for mail dealers and salesmen. \$600 profit. N. Home, 1957 Warren, Chicago.

OPPORTUNITY to start lucrative business, little capital; avoid risk of credits; or carrying merchandise. Write Dept. 152, Paul Kaye, 149 Broadway, New York.

FORMULAS, trade secrets. Different, dependable. Catalog free. Thaxly Co., Washington, D. C.

STAMPS AND COINS

CALIFORNIA gold \$1/2 size, 27c; \$1/4 size, 53c. White cent and catalogue, 10c. Norman Shultz, Colorado Springs, Colorado.

HAVING no office I can offer these bargains. 1000 American hinges and 100 different stamps, 25c. 100 British Colonies, 35c. Get my free price list and try my "approval service." Elwood D. Weber, 812 South Avenue, Plainfield, New Jersey.

158 Genuine Foreign Stamps—Mexico War Issues, Venezuela, Salvador and India Service, Guatemala, China, etc., only 10c. Finest approval sheets 50% to 60%. Agents wanted. Big 72-p. Lists free. We buy stamps. Established 29 years. Huesman Stamp Company, Dept. 55, St. Louis, Missouri.

STAMPS—50 varieties, Africa, Brazil, Peru, Cuba, Mexico, etc., and Album 10c. 50 different U. S. 25c. 1,000 hinges, 10c. 1,000 mixed, 40c. List free. I buy stamps. C. Stegman, 5949 Cole Brilliante, St. Louis, Missouri.

50 different French Colonial stamps, 25c. Nickles, 122 Florida, Washington, D. C.

TRY Gopher approvals. Priced net. Specify countries desired. Reference. Gopher Stamp Company, 3515 Third Avenue South, Minneapolis.

U. S. 100 Var. Cat., about \$2.00 for 15c. Jax Stamp Co., Steger, Illinois.

WONDER packet stamps, 10c. Approvals. Buckey, 712-A Bowen, Dayton, Ohio.

600 VARIETIES stamps, 50. Herman Gast, 200 Biddle, Milwaukee, Wisconsin.

OLD money wanted. \$2 to \$500 each paid for hundreds of coins. Keep all old or odd money, it may be very valuable. Send 10 cents for New Illustrated Coin Value Book, 4x6. We pay cash. Clarke Coin Company, Ave. 6, LeRoy, New York.

1000 DIFFERENT stamps, \$2.00; 500, 75c; 300, 45c. Fred Onken, 630 79th Street, Brooklyn, New York.

FENWAY February Bargains. Famous Fenway Packet, 165 different, including Abyssinia, Nysa, Turkey, White Russia, 250 hinges, set Airplanes 12c, 50 New Europe 10c, 500 different \$1.00, 1000 different, best bargain, \$2.50. Fenway Stamp Co., Box 84, Fenway Station, Boston, Mass.

300 DIFFERENT stamps, 27c; 200, 18c. Michael, 5602 Prairie, Chicago.

UNIVERSAL packet, 100 varieties, all over the world, 10 cents. Colvert Stamp, 39 State, Rochester, New York.

FREE—Beautiful set of stamps to approval applicants. Postage 2c. Yonkers Exchange, Yonkers, New York.

17 VARIETIES Bulgaria stamps, 20 cents. List of 7,000 low-priced stamps free. Chambers Stamp Company, 111C Nassau Street, New York City.

LIKE Triangular Stamps? To introduce our Sudden Service Approvals we'll send triangular Plume, set China ships, large \$1.00 United States revenue, also packet 50 foreign, millimeter scale, perforation, gauge, ruler and bargain lists—for only 9c. Fennell Stamp Company, Department C, Fullerton Building, St. Louis, Missouri.

OLD coins, large Fall selling catalogue of coins for sale free. Catalogue quoting prices paid for coins, ten cents. William Hesslein, 101A Tremont Street, Boston, Massachusetts.

STAMPS, 20 unused. All different 3 cents. Mention paper. Quaker Stamp Co., Toledo, Ohio.

MUSIC AND SHEET MUSIC

CORNETISTS, trombonists, saxophonists, clarinetists, send for "Free Pointers." Mention instrument. Virtuoso School, Buffalo, New York.

HAVE you poems or melodies? Have wonderful proposition. Ray Hibbeler, D1, 4040 Dickens Avenue, Chicago.

SONG Poems wanted at once. Frank Radner, 5044 Prairie Avenue, Dept. 629, Chicago.

WRITE the words for a song. We compose music. Our chief of staff wrote many big song-bits. Submit your song-poem to us at once. New York Melody Corp., 419 Fitzgerald Bldg., New York.

Technical Training Will Double Your Income

Send for the Proof

There is no quicker, surer way for a man to get out of a rut and rise to high pay than through technical training. Never before such a pressing need for experts in every line of productive industry and in building enterprises. If you are in a small pay job—if you "can't see the future," mail the coupon for information on where the opportunities are and how you can prepare for them.

We send a **Free Trial Lesson** if you are interested in **Drafting or Plan Reading**. **Free Books and Blue Prints** if your inquiry is about training in the **Building Trades**.



Drafting, Building (Plan Reading Estimating Superintending) and Other Specialized Training Easily Obtained in Spare Time at Home



Designer



Plant Supt.



Plumber



Shop Supt.

Make your spare time count for more money. Put in a few hours a week to get specialized knowledge on any of the subjects listed in the coupon and your future is secure—you step years ahead of the plodder who is "waiting for his chance." With technical training you need not wait for opportunity. You will be the man wanted to plan or direct important work. You will be in line for high salaries and important positions.

Get Practical Instruction From Chicago "Tech" Experts

Enrolled with Chicago "Tech" you are instructed by practical men. You are taught the way things are actually done in big engineering or building enterprises. That is why Chicago "Tech" men are so constantly in demand. No more certain way to success than to get this kind of training. And now is the time to get it when there is such a pressing demand for experts. No special preparation required for these courses. They are easy to understand—every point is made clear, and at every step you have practical men directing your study.

Chicago "Tech" Men Succeed

Everywhere you find Chicago "Tech" men in paying jobs or in paying businesses of their own.

J. A. Da Costa was a punch press hand who enrolled with Chicago "Tech" and as a result of his training was made Production Manager.

A. S. Ross took the Drafting Course. Salary was raised \$225 a month. Now in profitable contracting business.

R. L. Cary was a draftsman—took Chicago "Tech" instruction and became Chief Draftsman and Supt. of Construction at 4 times former salary.

O. L. Roan became a prosperous architect and contractor as a result of his Chicago "Tech" training.

Hundreds of other men send similar reports of success as a result of their Chicago "Tech" training.



Auto Expert



Building Supt.



Aero Expert



Contractor

Send the Coupon—Today

No matter what your present job or where you live, you can get this pay raising technical training from the Chicago "Tech" experts. If you can't come to the

College you can get it by mail. Find out about the Chicago "Tech" Method now. Mark X in the coupon to show which course interests you and mail it today.

CHICAGO TECHNICAL COLLEGE,
331 Chicago Tech. Bldg., Chicago, Illinois

Without cost or obligation on me please send instructive matter about opportunities in line I have marked with "X."

☐ Drafting (The Big Salary Course) no experience necessary

☐ Building Trade Course for men in the building lines

☐ Surveying and Map Drafting

☐ Automobiles Gas Engines, Starting, Lighting, etc.

☐ Aeronautic Engineering All about aeroplanes

☐ Plumbing, Heating and Ventilating

☐ Steam Engineering

☐ Plan Reading for Shop Men—Machinists, Assemblymen, etc.

Name.....

Address.....

Post Office..... State.....

FLEXIBLE
BINDINGPOCKET
SIZE

ENTIRE SET ONLY \$12

\$1
PER
MONTH

\$10,000 Master Set

AUDEL'S ENGINEERS and MECHANICS GUIDES—

THE BOOKS YOU HAVE
BEEN WAITING FOR

4750 Pages—8754 Illustrations

Just completed—Audel's New Master Set for Engineers
and Mechanics!

Every Engineer, Mechanic and Electrical worker will
welcome this set as a sure source of advancement and higher
pay because of the complete up-to-date information that
is thoroughly and easily explained on every branch of En-
gineering and Electrical practice.

Why a \$10,000 Library? Because it would cost the reader
more than \$10,000 together with years of labor and ex-
perience to collect, plan, arrange and prepare for his own
study and ready reference, the vast fund of knowledge
printed in this **Master Set**.

The entire set costs you only twelve dollars—knowledge
and instruction that has cost thousands of dollars and years
of time—yours for \$12.00—\$1.00 a month.

Study This Brief Table of Contents

Theory, Practice and Operation of
ALL Steam Engines, Valve Motions—
VALVE SETTING; complete infor-
mation on ALL engines and pumps—
CORLISS ENGINES and the Theory,
Construction and Operation of all
Steam Engines, including UNIFLOW
and POPPET VALVE ENGINES,
and LOCOMOTIVES—Locomotive-
Marine Engines; Turbines; Rotary
Engines—the Indicator—Lubrications
—PRACTICAL MANAGEMENT.
How to use Indicator—GAS, GAS-
OLINE, OIL, SEMI- and FULL
DIESEL ENGINES—Aeroplane and
Aviation—HOW TO SELECT AN
ENGINE, working instructions, draw-
ings on STEAM ENGINE DESIGN,
including rules and formulae. Theory
and Construction of ALL Steam
Boilers; Heat-Combustion; Fuel and
Flue Gas Analysis—CO₂ recorders—
Characteristics of Boilers—Materials

—Construction of all types of Boilers,
(THE LATEST PRACTICE.)—Boil-
er Construction—Mechanical Stokers
—Oil Burners—Setting—Chimneys—
Mechanical Draught—HOW TO
SELECT A BOILER—Complete in-
structions and drawings on BOILER
DESIGN based on A. S. M. E. BOIL-
ER CODE—OPERATION, including
installation, FIRING; care and repair
of Steam Boilers—Pipes, Fittings and
Pipe Fitting—Heating and Ventila-
tion—Refrigeration—Cooling Towers
—Condensers—Distilling Apparatus
—Elevators—Cranes and Hoisting
Machinery—Ropes and Cables—Splic-
ing—electric wiring in ALL branches;
compendium of practical electrical
engineering as an aid for engineers
and electricians in obtaining a license
—57 chapters—ready reference index,
covering entire field of Modern
Electricity.

Helping Hand
Books that answer
Your Questions

FREE
EXAM-
INATION



Send No Money—Send Only This Coupon

THEO. AUDEL & CO.,
72 Fifth Ave., New York City

Please submit me for free examination, AUDEL'S \$10,000 MASTER SET
FOR ENGINEERS AND MECHANICS. Ship at once, prepaid, the 8 num-
bers, total cost \$12. If satisfactory, I agree to send you \$1 within seven
days and to further mail you \$1 each month until paid.

Name.....

Occupation.....

Employed by.....

Home Address.....

Reference..... P. S. Mar., '23.

Men of the Hour in Science and Discovery

Close-Ups of Some of the
Makers of Tomorrow



Probes Life Secrets

ONE of the world's most famous desert explorers, Dr. D. T. MacDougal, general secretary of the American Association for the Advancement of Science and a tireless worker in the field of botany, has actually succeeded in devising an artificial cell that behaves much like the living cells of plants.

By means of remarkable apparatus shown above he is able to simulate many properties of living protoplasm, such as the process by which living plant cells absorb food materials.

Teaching Us to Travel by Air

COMPLETING arrangements for a 5000-mile air trip to the Arctic Circle in a palatial flying boat, Charles F. Redden hopes to confirm further his belief in the practicability of long distance commercial aviation in America—a belief that induced him to organize the Aeromarine Airways, Inc.

Instead of merely talking about a "glorious future for commercial aviation," Redden set out to make a record in aerial transportation. In the second year of operation, his company carried 9107 passengers 739,047 passenger miles without a mishap.

His proposed journey to the Arctic is the first step to establish regular aeromarine service between New York City and the Far North. With him will go half a dozen businessmen-sportsmen bent on an arctic hunting expedition. Plans for the voyage are described on page 59 of this issue.



Luther Burbank

THE best loved and most picturesque of America's great scientists this month rounds out his fiftieth year of labor in plant wizardry—an event that is being celebrated by California, his home state.


During half a century of achievement, Luther Burbank has evolved more new species of valuable plants than any other man.

In next month's issue he will tell in his own words the fascinating story of his life work and of his dream, at the age of 74, of applying the laws of plant raising to creating better humans.

A Famous Young Explorer

IN LONG and hazardous exploration trips through China, Roy Chapman Andrews (at left) has collected thousands of strange fossils that are giving us amazing new knowledge of life on earth in prehistoric times, making it possible for science to piece together, bit by bit, the world's history.

This young scientist of the American Museum of Natural History (who incidentally is one of the world's leading authorities on whales) has explored Alaska, the Dutch East Indies, Borneo, Asia, and right now is in Peking, preparing for his third expedition through the Gobi Desert of China, where he has discovered the remains of giant reptiles and what scientists believe to be the first mammals.

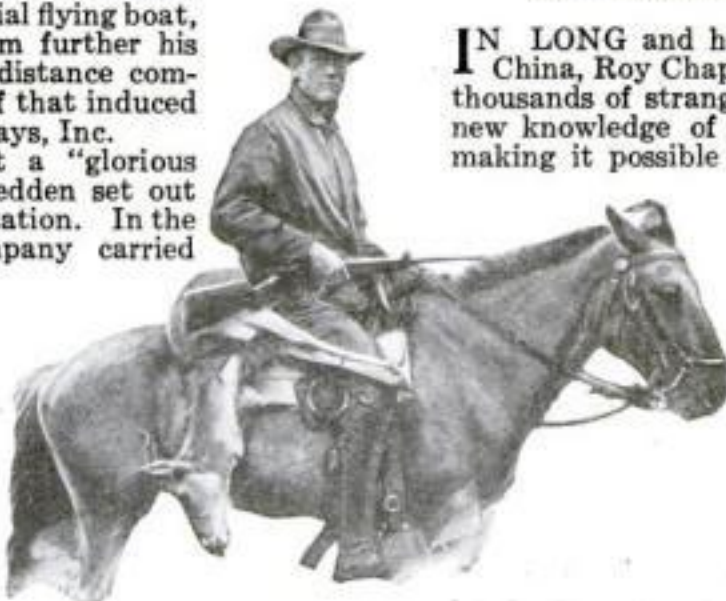

"When happiness or calamity is about to come,"
 said Confucius, "it can be known
 beforehand." Insure complete
 radio happiness with

A Grebe Receiver.

Doctor Mu.

IF YOU buy inferior radio apparatus
 you must not expect the best
 results.

Its long record of satisfactory service has won for the Grebe Receiver the unqualified endorsement of all experienced radioists and dealers.

Your copy of "Musings of Doctor Mu" sent free upon request.

A. H. GREBE & CO., INC.
 RICHMOND HILL, N.Y.

Licensed under
 Armstrong U. S.
 Pat. No. 1113149





Auto Racer "Towed" to Victory by His Rival

Pal of Veteran Speed Kings Reveals Amazing Speedway Trick

By Steve Hannagan
(Team Mate of Famous
Racing Drivers)

WHEN I tell you that the driver of a racing car, with a top speed of 110 miles an hour, can hitch an invisible towline onto a faster car ahead of him, and have his slower car pulled along at a winning pace of 120 miles an hour, you may call the statement ridiculous.

Yet just such an amazing performance may be witnessed in nearly every major automobile racing event, and undoubtedly will be seen during the Indianapolis 500-mile classic of next Decoration Day. True, the "tow" is neither a rope nor a chain. It is formed by the partial vacuum created in the wake of the faster car. Once a slower car noses into this vacuum, the suction has the effect of adding several miles an hour to its speed.

A driver gets into a tow by quickly swerving in behind the faster car as it passes him. As he does so you can see the slower car leap ahead.

In more than one speedway contest this

RIDING shoulder to shoulder with the world's most famous speed kings on every known type of automobile race track, and counting among his friends such veteran drivers as Ralph De Palma, Tommy Milton, Barney Oldfield, Ralph Mulford, Eddie Hearne, and Joe Boyer, the author of this article—Steve Hannagan—knows the science of automobile racing—not to mention the tricks of the game—as thoroughly as any man living today.

Hannagan has lived to the thundering tune of the speedway ever since he was 16 years old. His latest adventure was to take to the air with Capt. Eddie Rickenbacker, former speedway star and America's ace of flying aces, on his famous sky tour of the United States last summer.

"suction towline" is used by a driver to give his slower team mate a lift. The faster car will pick up its mate and the two will travel radiator to tail, lap after lap.

In one race I remember the "towline" was used by the slower car to defeat a speedier rival. It was the 1920 Indianapolis 500-mile race, in which Ralph De Palma and Joe Boyer staged a radiator-to-radiator duel at the finish line lap after lap—a race in which each lap won meant a reward of \$100 for the victor.


Because De Palma's car was slightly faster than Boyer's, Boyer began "grabbing

De Palma's towline" coming out of the turns, tacking into the suction of the speedier car, and making De Palma pull him down the straightaway, while Boyer rested his motor. Just before they crossed the finish wire, Boyer would speed his motor and suddenly swerve to the side of the leader, crossing the tape inches ahead, and pulling down the prize money.


To overcome wind resistance all racing cars are streamlined. The tremendous advantage of streamlining was strikingly demonstrated in the long,

narrow machine with which Tommy Milton smashed the world's speed record, driving 156.4 miles an hour at Daytona Beach, Fla. The car was a single seater.

Yet the long, tapering design, so effective in cutting the wind on the straightaway, worked with reverse effect when the car was tested on a speedway with banked turns. Every time Milton swerved for a turn, the long tail of the speedster would swing against the wind, creating suction at the leeward side of the car. Here the very suction that has helped other drivers to victory, served to retard Milton's speed.

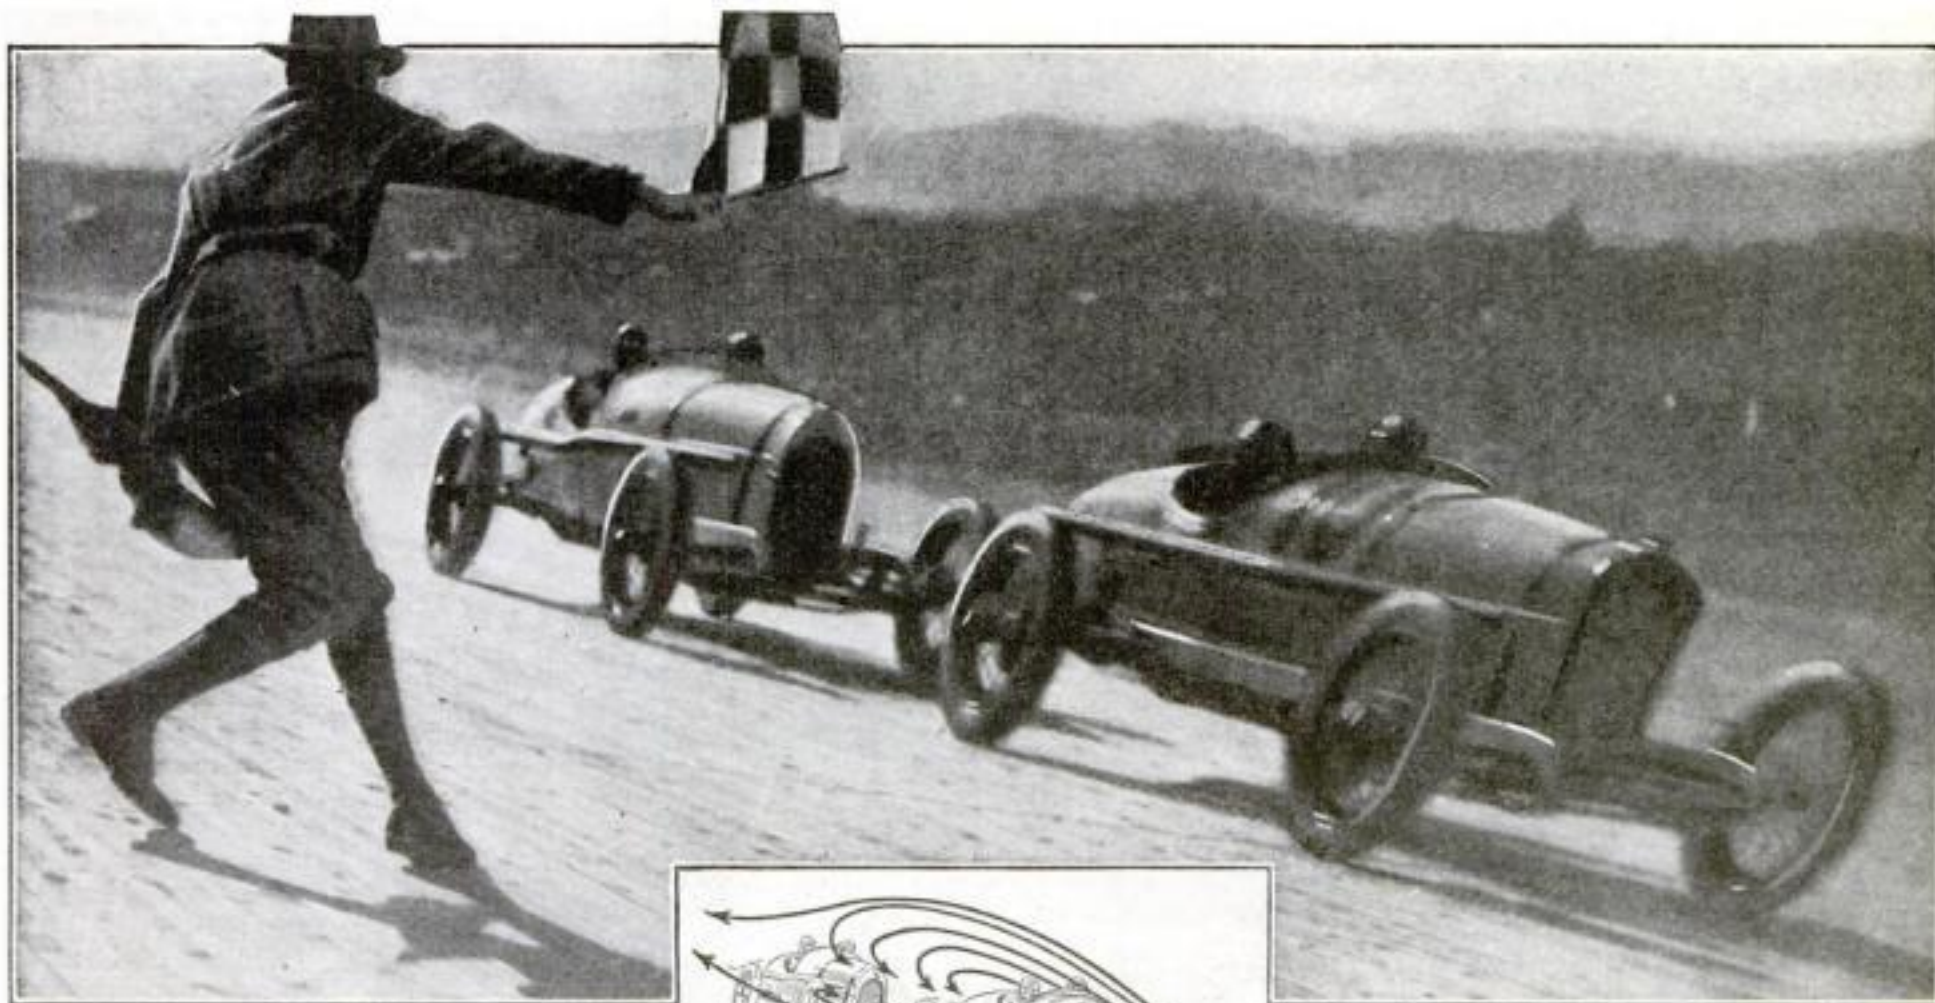

How a racing car gets a "tow" by nosing into the suction behind a speedier car. This remarkable photograph shows Joe Thomas, traveling at terrific speed while towing a slower car with him, winning at Los Angeles, Calif., speedway

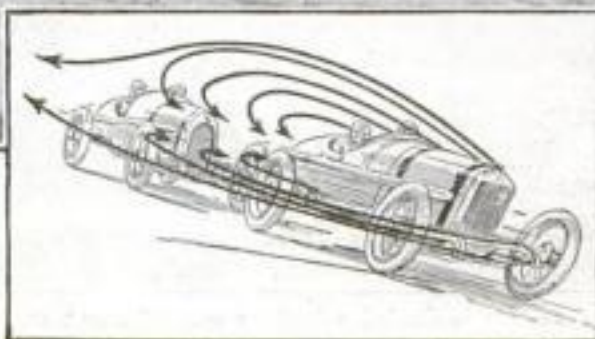

In one contest, Hannagan reports having seen Eddie Rickenbacker tow Ralph Mulford in this manner at an average speed of 85 miles an hour, when the best speed Mulford's car could attain alone was only 67 miles an hour

World's Richest "Fan" Booms Radio

By Jack Binns

World Famous Radio Expert and Staff Writer for POPULAR SCIENCE MONTHLY

ALONG the storm-swept sands of Buzzard's Bay on the rocky Massachusetts coast, eight towering wireless masts have recently sprung up to mark the site of the most amazing radio experiment station in the world. They stand at once as the fulfilment of a millionaire radio fan's hobby and as beacons of hope to rebuffed and discouraged radio inventors everywhere.

Here Col. Edward H. R. Green, crippled son of the wealthiest woman in history, is transforming his 259-acre "Round Hills" estate into a radio Utopia where he bids penniless experimenters and experts from far and wide to delve with him freely into the fascinating mysteries of the air. With part of the huge fortune amassed by his famous mother, Hetty Green, he is converting the sun parlor of a palatial country mansion into a private radio research laboratory equipped with every piece of apparatus known to modern wireless science.

His "open house" will include free use of unsurpassed laboratory facilities, the assistance of a paid staff of skilled engineers, and the benefit of broadcasting and reception stations that are among the most powerful in the country.

And why, you may ask, is Colonel Green doing all this?

The answer is simple. It's his hobby.

"It's pure selfishness," he confessed. "I am interested in radiodevelopment for the pleasure it gives me. But I believe, too, that the pleasure of radio should be accessible to every man, rich or poor. The future of radio lies largely in the hands of enthusiastic amateurs who will spend days and nights working over some little problem, for the sheer fascination of the thing, without thought of ultimate profit. I want to aid these enthusiasts, at any cost, to put their theories into practice."

By next June, this millionaire radio fan expects to open a free school for amateurs, with a picked staff of instructors, radio experts, and lecturers.

"My aim," he says, "is to hasten the ad-



Col. Edward H. R. Green—son of the world's richest woman, the late Hetty Green—who is devoting his fortune to developing radio for the benefit of mankind

vent of the 'radio Ford'—the low-priced receiving set that will cost not more than \$25 complete, but that will be really sensitive, reliable, and simple to operate."

To further this aim, Colonel Green proposes an annual prize contest in which the amateur who offers the idea that advances radio the most during the year will receive a first prize of \$5000.

The equipment of the experiment station will be a marvel of perfection when completed.



From this unique loudspeaking tower overlooking Colonel Green's estate it is possible that radio broadcasts may be heard, when the wind is right, by next summer's visitors at Martha's Vineyard, 20 miles away. Note wooden horns at top of tower


The aerials for nine transmitting stations will be supported by 12 masts, four of steel 246 feet high, and the remaining eight of wood, 125 feet high. In addition, there are three 12-foot loop aerials.

The larger of three broadcasting stations will operate on the 400-meter wave length allotted to Class B stations and the other two on 360 meters. To judge the quality of signals sent out, special receiving stations are being erected along the Massachusetts coast and in New York City.

These receivers will be tuned to the transmitters at Round Hills, and their output connected with long distance telephone lines, and carried back over wire to Colonel Green's estate. In this manner engineers at Round Hills can obtain first hand knowledge of the quality of reception in any given direction and under any known local conditions.

The outstanding achievement of the receiving end of this vast laboratory is a loudspeaking tower, resembling a lighthouse. Around a ledge near the top of the tower have been placed large wooden loudspeaking horns. The volume of sound from these horns is sufficient to be clearly audible over a radius of $4\frac{1}{2}$ miles. Fishermen on the bay can enjoy entertainment such as they never before dreamed of.

While Colonel Green proposes to offer every assistance to worthy experimenters, the laboratory staff will be engaged in developing the art of radio generally.

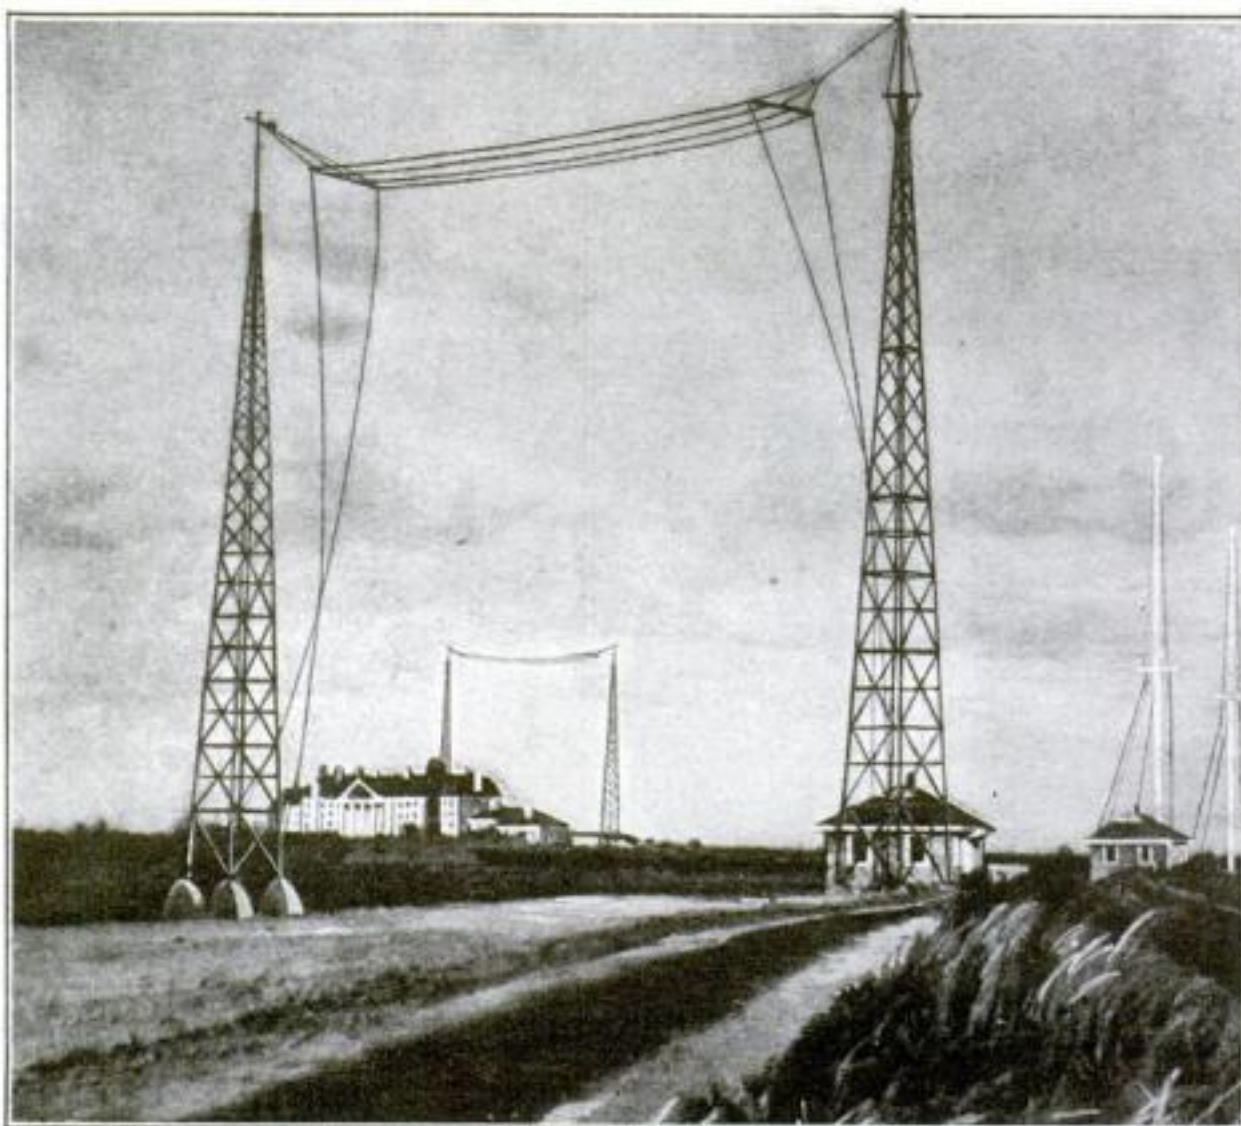

This view of Colonel Green's palatial wireless experiment station shows aerial masts for transmission. The sun parlor of his mansion in the distance is being converted into a radio laboratory with complete modern equipment

Waterfall Plunges from Power Plant "Safety Valve"

IMAGINE a great stream of water flowing through a mountain tunnel nearly two miles long, then rushing with tremendous force through 15-foot penstocks, or power house supply conduits, at the rate of 1800 cubic feet a second.

What would happen if valves in the penstocks were suddenly closed, causing this great body of surging water to gather its full force and strike a terrific blow, like some gigantic sledge hammer, against the walls of the conduits?


That is the problem that confronted engineers in constructing the Pitt River power plant, which supplies the San Francisco Bay region in California. By experimenting with miniature models, they learned that to prevent the pipe lines from bursting under hammer blows from sudden changes in pressure within the pipe, they would require a chamber 60 feet in diameter and 55 feet deep to take off the surge, or massing of waters.

Such a surge chamber they built at the penstock end of the 10,111-foot tunnel. At normal times, water flows from the tunnel through

the surge chamber, and from there directly into two penstocks 1370 feet long. The flow is governed by two butterfly valves, 10 feet nine inches in diameter, said to be the largest in the world.

When it is necessary to divert the water from the plant, these valves are closed, the surge chambers overflow, and the water is diverted to one side, plunging over a precipitous cliff to the bed of the river 400 feet below.


This plant is but one unit in a gigantic power development project which, when completed, is expected to have 600,000 horsepower capacity.

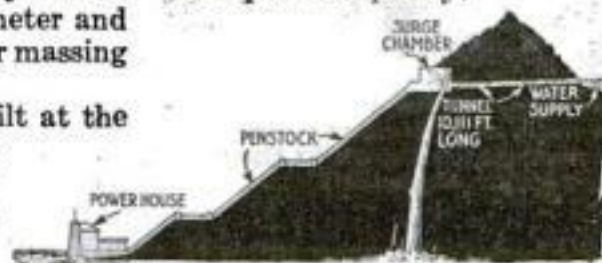

PLUNGING over a precipitous cliff to the river 400 feet below, this picturesque waterfall represents a tremendous force of excess waters from the Pitt River power plant, Calif.—a surging mass that, if suddenly arrested in the penstocks by the closing of valves, would act as a gigantic sledge hammer, breaking the pipes

THIS seething water flows from a surge chamber—the safety valve of the power plant—stationed at the head of the penstocks and at the end of a two-mile supply tunnel through a mountain, as shown in central diagram. When penstock valves are closed, the surge chamber overflows, the overflow being diverted over the cliff as shown above

The photograph at the left shows the magnificent Pitt River power house.

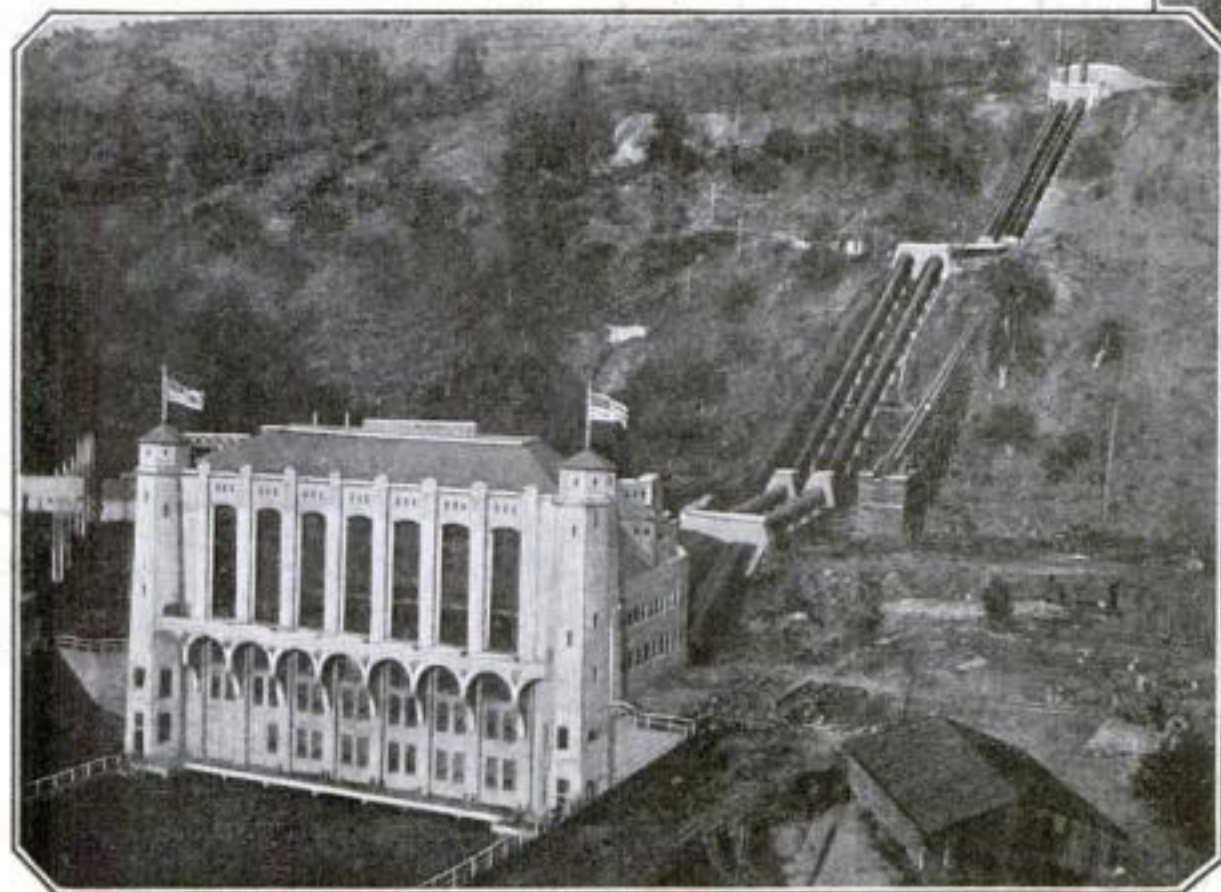

Compressed Air Shoots Round Bullets from High Power Rifle


AMMUNITION costs for hunters may be greatly reduced through the invention of a high power pneumatic rifle by A. V. Dickey, of Seattle, Wash. The gun uses compressed air under 600 pounds pressure and is said to have a muzzle velocity of 200 feet a second greater than that of the ordinary small caliber powder rifle.

A lever attached beneath the rifle is connected with an air pump. This lever is moved back and forth until sufficient pressure has been obtained in the air reservoir in the stock.

Spherical bullets are then inserted in a chamber behind the breach, a cocking slide on the right side is moved forward,


carrying one of these bullets into the gun chamber.

Pulling the trigger releases a hammer that strikes a firing pin attached to the air release valve. The instant the valve remains open is sufficient to allow a quantity of air under a pressure of 600 pounds to escape, forcing out the bullet.

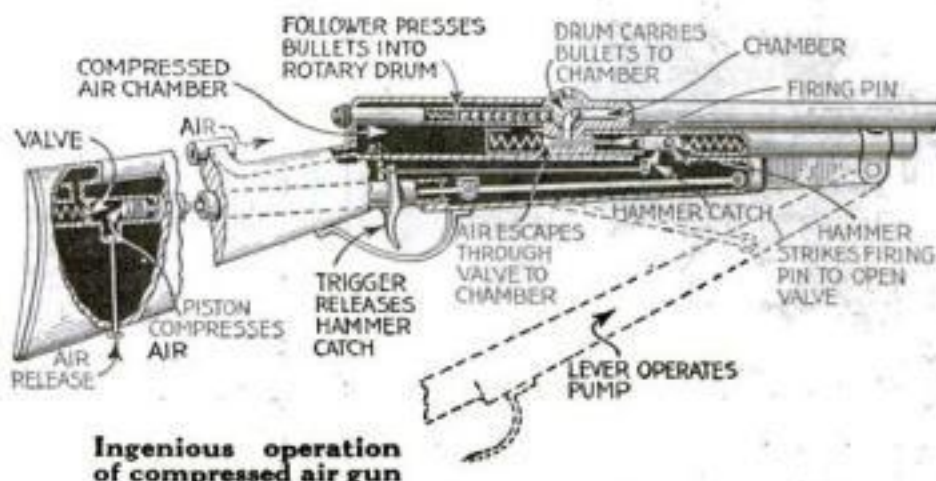

The operator pumps air into a reservoir in the stock of this high powered pneumatic rifle. Spherical bullets are inserted, and the trigger, when pulled, opens a valve, releasing enough compressed air to drive out the bullet at high velocity

Porous Concrete "Boards" Are Fastened by Nails

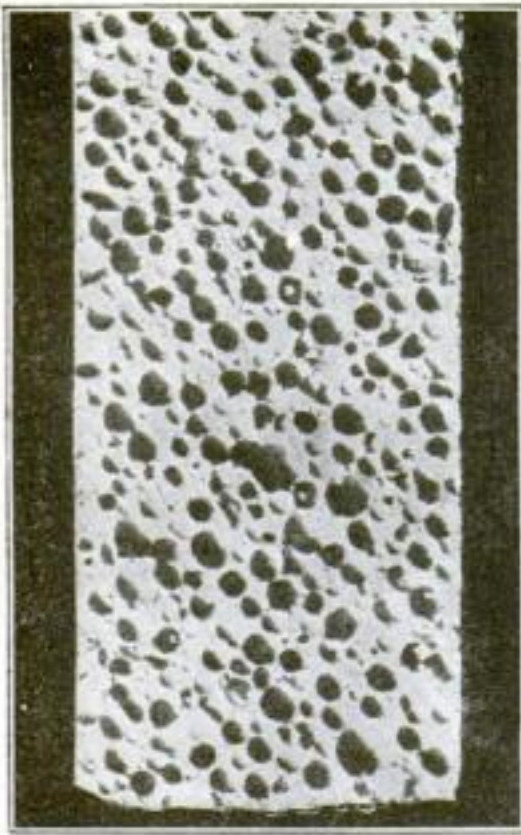

Nailed to wooden studding, porous concrete slabs an inch thick form the walls of this attractive garage. The structure of the material is shown in the actual size cross section at the left



THIN, porous concrete slabs that are extremely light in weight yet strong enough to withstand a crushing pressure of 600 pounds to the square inch have been developed recently by a New Jersey manufacturer.

Reinforced by wire netting, these concrete boards, only an inch thick, can be nailed to studding much as lumber would be. Because of their peculiar air-cell structure, they are said to be exceptionally effective heat and sound insulators; while their resistance to heat, steam, or water, it is claimed, make them comparatively fire-proof.

Mixed with Wax-like Pellets


In manufacturing the slabs, cement and sand are mixed with a specified quantity of small pellets of a secret chemical composition resembling paraffin wax. After water is added, the cement, sand, and pellets are mixed thoroughly, then poured into a steel form over wire netting reinforcement.

As soon as the cement has set, the slabs are removed from the forms, placed on steel cars and hauled to a steam tank where, under the action of exhaust steam, they are heated rapidly. This heat melts the waxlike pellets, which drip out of the slabs into receptacles beneath the steam tank.

After about 24 hours of steam treatment that removes all traces of the chemical, the slabs are in a porous state. At this point they are cooled and placed in a steam curing room, where they are kept heated and moistened for two or three days until they


possess the strength necessary for building operations.

When used in connection with stucco finish, the siding slabs are nailed to wooden studs with the wire mesh reinforcement outward. This makes a good base for the stucco.

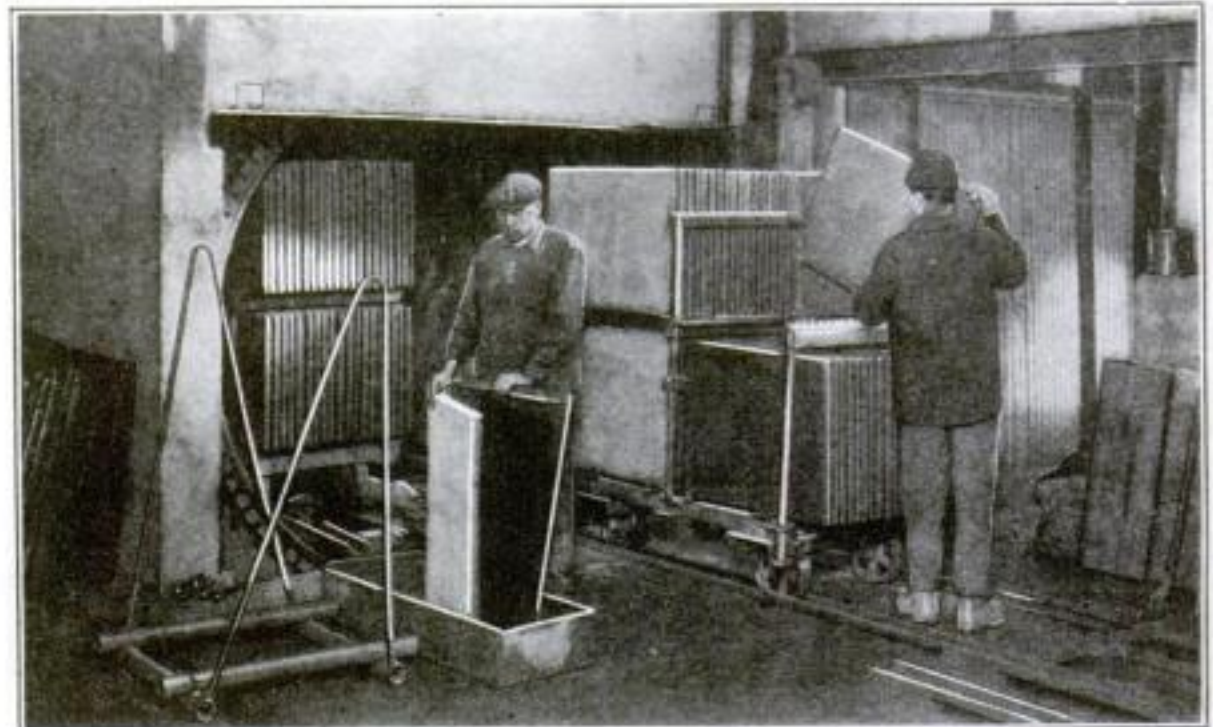

Carried in cars to a steam tank, in background, the unfinished slabs are subjected to heat that melts the waxlike pellets, producing pores

Water Pressure in Tube Measures Depth of Soundings

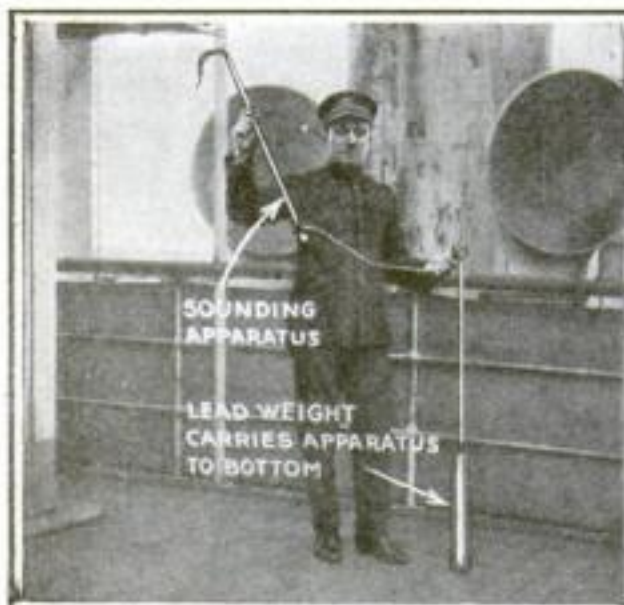

The brass pipe sounding apparatus, with weight attached to sink it



Depth is determined by measuring rise of water in glass tube

AN INGENIOUS sounding instrument now in general use consists of a brass pipe inclosing an air-filled glass tube and a lead weight that carries the instrument to the bottom of the body of water where soundings are to be made. Depths are determined by noting the extent to which water pressure compresses the air in the glass tube. The tube is open at the lower end, while the inside surface is covered with a water soluble dye. The instrument is suspended from a thin wire.

The water pressure at any depth is proportional to that depth; hence, as the instrument tube sinks, the water entering the brass pipe rises higher and higher in the tube, dissolving the dye as it rises.

When the instrument is raised, the depth of the sounding is determined by measuring, on a scale graduated in fathoms, the extent of the tube that is free from dye.

The Story of Man and His World

Beginning the Most Fascinating Serial of Science Ever Published

Especially Written By Dr. E. E. Free for Popular Science Monthly

Prepared with the co-operation of some of the world's leading scientists



E. E. Free, Ph.D.,
scientist, engineer,
traveler and writer
of popular science

DR. E. E. FREE, America's best writer of popular science, begins herewith a wonderful series of articles on the secrets of life and mysteries of evolution. He tells the story of how the Life Force first took shape in the sea, a billion years ago; of how it grew into countless strange new forms; of how worms, lizards, reptiles, and apelike creatures each in turn inherited the flame of life and passed it on to still higher animals; of how finally Man himself emerged.

And Doctor Free tells not only the *Story of Life*, but the *Story of Science*, by which we have learned Life's secrets. He tells how men have read Nature's picture-writing in the rocks, explored the heavens, probed the

secrets of invisible atoms, discovered queer animals in far corners of the globe, and finally pieced all these clues together into one majestic drama of the ages.

Behind this drama some may see moving a Divine Plan of things; others simply the thrilling work of blind chance; but none can fail to be inspired to awe by the natural wonders so vividly presented in Doctor Free's straightforward narrative of fact.

Thanks to the co-operation of many eminent scientists whose help Doctor Free has had in preparing each article, the most amazing recent discoveries of science are now put within reach of the average busy man for the first time.—THE EDITOR.

First Article:

The Dawn of Life

WE KNOW today that the earth is very old, older by millions of years than the scientists of twenty years ago would have believed possible. We now know that the great drama of life on earth, the drama in which you and I are playing our little parts, has been going on for more than a billion years.

Think what this means. A period so incomprehensibly long that a man's whole lifetime is but a few seconds in comparison!

Yet step by step back into this tremendous abyss of time we are now able to trace the evolution of man, the story of how every living thing in the world developed out of tiny life germs first born in the sea some thousand million years ago.

Suppose you could have been present then—what would you have seen? In pools along the margin of the sea you might have discovered a speck or two of transparent jelly; here and there on the surface a little scum of slime. You would not have recognized them for living things alone.



Behind the seashore rose smoke-crowned volcanoes. Against the barren cliffs surged storm waves of the primeval sea. Earthquakes rocked the land. Lightnings flashed; thunders rumbled; down over the rocks there poured the floods of rain.

And in the midst of all these natural wonders the greatest of them all would have gone unnoticed. For the greatest of them, the most significant, the most important in earth history, were undoubtedly just those small slimy specks washing about in the seashore pools.

These slime specks, or something very like them, became the parents of every living thing on earth. They were the first ancestors of man.

Where these first living particles came

The Story Told in Pictures



AND ABOUT 10 OZ. OF OTHER ELEMENTS, INCLUDING POTASSIUM, FLUORINE, SULPHUR, AND MAGNESIUM

What Your Body Is Made Of

The Same Story in Percentages

This picture illustrates what you would get if you analyzed the "contents" of an average man. These chemical constituents of the normal human body have a market value of about 98 cents! The column below shows the percentages by weight of the elements making up the various tissues, while on the opposite side of the picture are shown the normal quantities of each substance. Note that the body is mostly composed of water



66% WATER

3.1% NITROGEN

2.1% HYDROGEN


15.8% CARBON

2.5% CALCIUM


1.2% PHOSPHORUS

6.7% OXYGEN

Besides the above elements the body contains minute quantities of salt, sugar, potassium, iron, sulphur, iodine, magnesium, and fluorine, totaling a fraction over four tenths of one per cent.



The human body grows from a single egg cell, such as that shown highly magnified at left. Less than a hundredth of an inch in diameter, it can produce an adult man composed of thousands of separate tissues and containing all the chemical elements illustrated at right

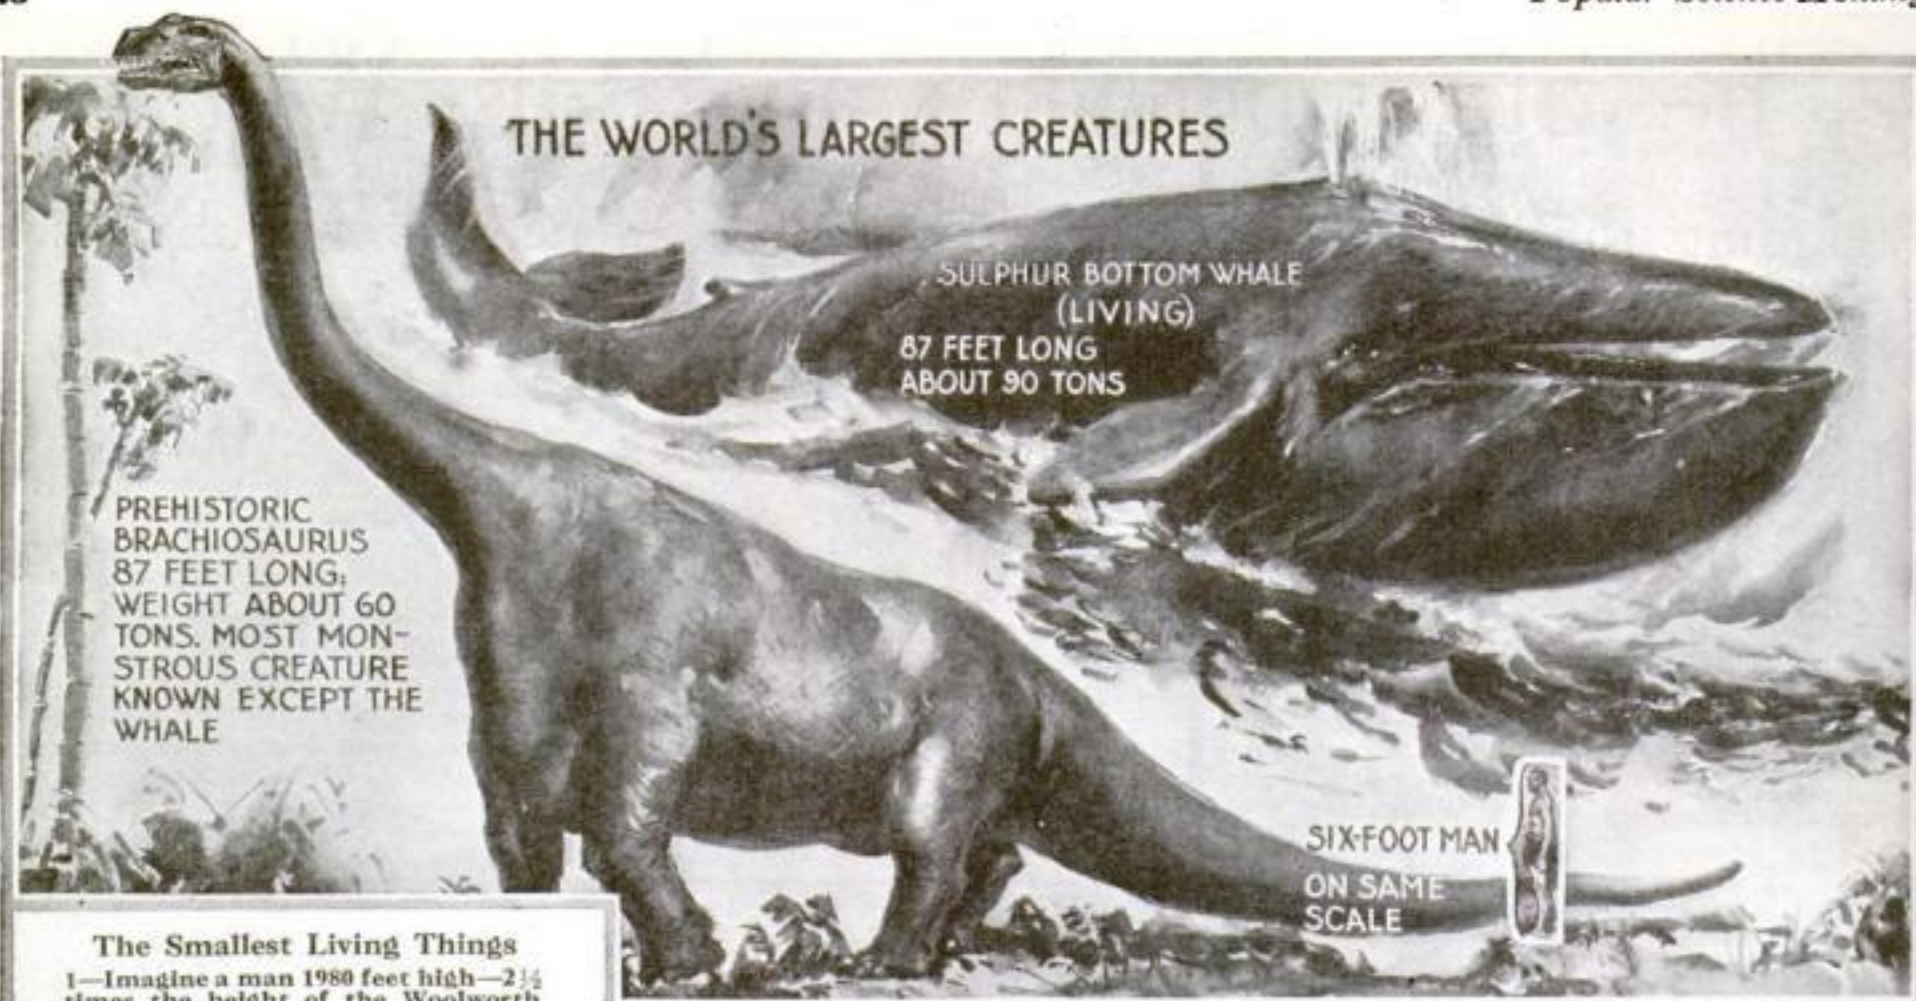

PREHISTORIC
BRACHIOSAURUS
87 FEET LONG;
WEIGHT ABOUT 60
TONS. MOST MON-
STROUS CREATURE
KNOWN EXCEPT THE
WHALE

SULPHUR BOTTOM WHALE
(LIVING)
87 FEET LONG
ABOUT 90 TONS

SIX-FOOT MAN
ON SAME
SCALE

The Smallest Living Things

1—Imagine a man 1980 feet high—2½ times the height of the Woolworth Building. Now, imagine all other living things enlarged in exactly the same proportion. Then some of the tiny organisms mentioned in this article would be magnified to the actual size shown below. The flagellate is a single-celled water-living creature. The rotifer is a higher form of life consisting of many cells

HUMAN
RED BLOOD
CORPUSCLE

THE GERM OF
TYPHOID
FEVER



AT RIGHT,
A SMALL
ROTIFER,
THE SMALLEST
MANY-CELLED
ANIMAL



ABOVE,
A FLAGELLATE
PROBABLY
RATHER LIKE
THE ORIGINAL
LIVING ORGANISM



2—Scientists read the story of life by studying fossils, which are shapes of ancient animals preserved in the rocks. The photo above shows a fossil "trilobite"—half crab and half insect—just as he was buried in the ocean mud half a billion years ago

from, we do not know. Distinguished scientists have believed it possible that the germ of life first came to earth from another planet; hidden, perhaps, in the crevices of a meteorite or merely as living dust floating through space. We cannot positively say that this is wrong.

But it is more probable, I think, that living matter originated right here on earth; that in the course of ages, combinations of chemicals took place spontaneously in the primeval sea; that as time went on, these combinations became more and more complex; that finally, without any very sudden change or clear transition, they were alive—they were breathing, growing particles of living matter.

Secrets of Life's Origin in Us

But how, you ask, can we know what the original living matter was like? Strictly speaking, we do not really know at all. But we can make a pretty safe guess at it, a guess based on first class scientific reasons.

One of these reasons you can find inside yourself. If you could somehow enlarge yourself until you were some 5000 feet tall—about ten times as high as the Washington Monument—you would be able to see that your bones and muscles and other tissues are not simple materials like glass or wax, but that each one of these tissues

Photo at left by Amer. Mus. of Natural History

consists really of a great assemblage of tiny separate particles which scientists call "cells." There may be as many as a billion of these cells in a cubic inch of flesh. Each human body as a whole contains thousands of billions of them.


Cell Units Perform Varied Duties

These cells are the units of life. There are many kinds of them in your body, each kind with a different duty. Inside your enlarged self you would see some cells busy making juices to digest food. Others would be lengthening and contracting again as the muscles worked. Still others would be building bone where the skeleton was growing. Most wonderful of all, you would see some cells set apart for nerve duty. Growing out of each one of these, you would notice a long threadlike tail. These tails are gathered into bundles to make up your nerves. Even your highest organ—the brain—is made up of cells, most of them tailed like the nerve cells, their tails connecting with innumerable other cells in the nerves or other parts of the brain and so making up the intricate communication system with which you think and govern your body's actions.

But beside the fact that human beings and all other creatures are composed of cells, we have other reasons for believing



3—In the human blood we find tiny cells that live independently. They are the white corpuscles, one of which, enlarged more than 2000 times, is shown above in the act of "eating" a disease germ by flowing around it

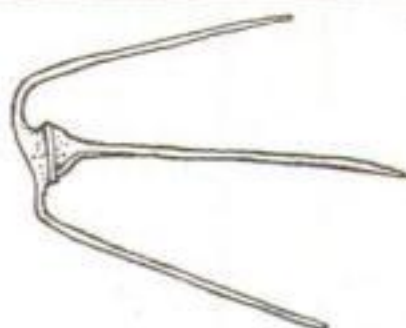


4—Here is one of the "single celled" creatures that make up the "plankton" of the sea. Millions like it float in every cubic inch of surface sea water. The earliest living thing was probably a single celled "plant animal," even much simpler than this. The "plankton" feed by absorbing sunlight and food chemicals



5—Life first took form as a single cell. Later, groups of single cells took to living together. The strange microscopic creature above, called "Volvox," consists of such a colony of cells, most of them alike

The Largest Flying Creature that Ever Lived

Top pictures courtesy Amer. Mus. of Natural History

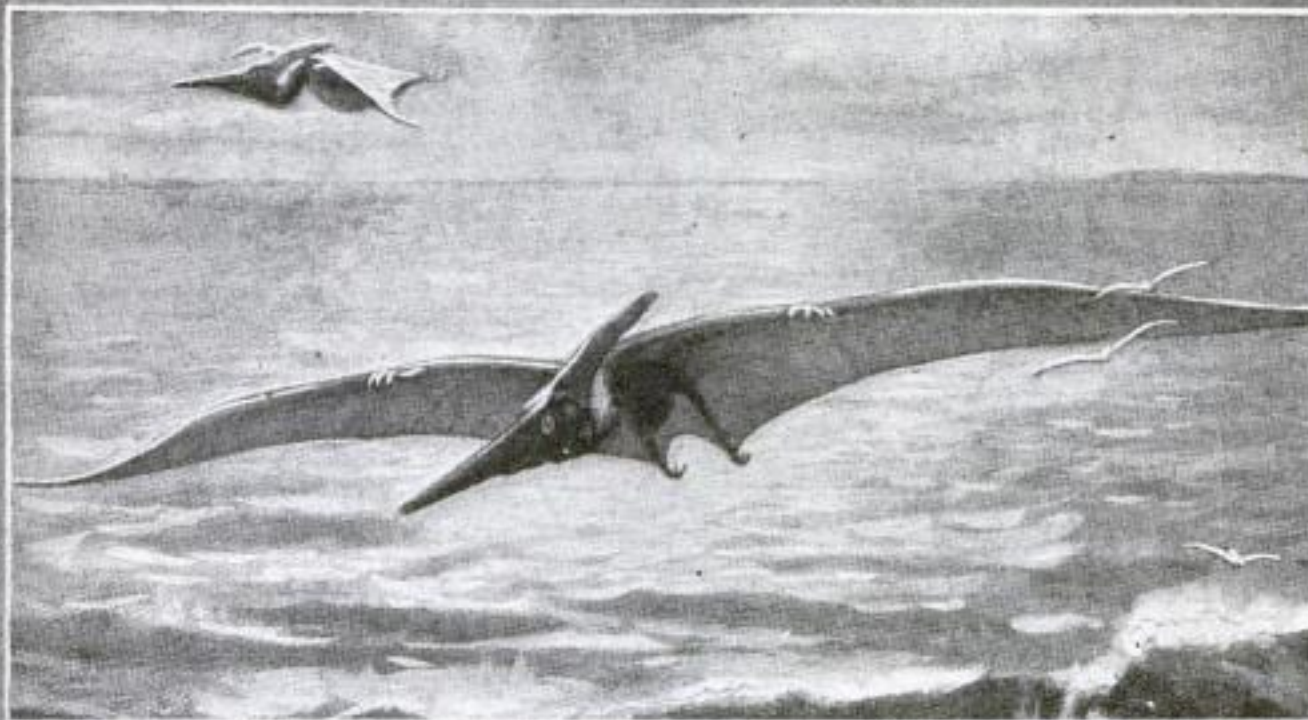

This huge flying dragon, Pteranodon, measuring more than 26 feet from wing tip to wing tip, once lived where the state of Kansas is now. His wings consisted of membranes between his body and an overgrown little finger, some nine feet long. Note three other fingers like claws on his wings. He was a member of the family called Pterodactyls.



11—Still living in East Indian forests, this lemur, the Tarsius, is close to the line of descent of man. Some fifty million years ago, lemurs lived in many parts of the world, including North America. From them developed monkeys, apes, and man.

that life itself began as a single cell—a microscopic drop of jelly. One of these reasons is that all living things today grow from such a single cell. And not only does every living thing—plant, fish, insect, man—start from a single fertilized egg cell, but it grows to its final complex structure simply by division and subdivision of this cell into intricate cell colonies.

Independent Cells Can Live Alone

Still another reason is that cells do not always live in such colonies. Certain kinds can live alone, each cell for itself. Examine, some day, under a powerful microscope, a few drops of water from a pond, or from the sea, or from one of the little pools that gather in roadside ditches. You will discover a new world, a world crowded with living creatures. Scattered over the field of view of your microscope are clumps of little greenish globes that really are minute plants; now and then you will catch sight of the darting, wriggly forms of tiny animals. Along the bottom of your water-drop world you may see another animal creeping; a sluggish one, without any visible internal organs, continually changing in shape, looking merely like a speck of slime, yet unquestionably alive. Scientists call this creature the amoeba.

All these myriads of creatures that fill the water-drop world are so small that the

unaided eye of man would never have suspected their existence. And most of them are single living cells, a good deal like the cells of your body, except that each one of them is independent and lives by itself.

There are even some one-celled creatures like this that live inside your body as necessary parts of it, but without being attached to other cells and, so far as we can determine, independent, just as though they were separate living creatures that merely condescended to make our body their home and do enough work to earn their keep.

These free-living cells inside us are the white corpuscles of the blood. Under the microscope they are merely little specks of translucent grayish jelly. They look for all the world like the creeping jelly-drop amoeba that you saw under your microscope in the ditch water. These white corpuscles float around in the blood, visiting all parts of the body together with the ordinary red corpuscles that give the blood its color. So long as we are well, they do not seem to have very much to do.

How White Corpuscles Attack Germs

But suppose disease germs invade the body somewhere. The white corpuscles immediately mobilize like a well-trained army at the point of the germs' attack. Wherever they find one of the invading germs, they dispose of it by the simple ex-



Courtesy Amer. Mus. of Natural History
10—The ancient giant reptiles were among the most spectacular creatures developed in the evolution of life. This curious lizard from New Zealand—the tuatara resembles some of them.



6 and 7—Photograph of a fresh-water hydra, taken from the only motion picture ever made of this curious animal. The hydra, found in ponds almost everywhere, is about one sixteenth of an inch long.

7—Representing one of the simpler forms of the great group of many-celled microscopic animals that probably developed from cell colonies like Volvox (see opposite page), the hydra has eight waving arms about its head. These arms seize food and cram it into the mouth, at the end of the body between the arms. Thus the cells that were all alike in earlier "cell colonies" have now become specialized, and the creature has a body with various parts carrying on different jobs.

The little bulge on the side of the body is a "bud," the beginning of a new hydra. This bulge will grow longer, develop a set of arms of its own, and will finally drift off by itself, a complete new animal. The hydra also reproduces sexually.

Photo courtesy
Carpenter-Goldman Laboratories



8—The sea squirt, beginning life as a backboned animal, degenerates to plantlike growth.



9—Venus' fly-trap—one of the strangest of plants—has on each leaf three little hairs. When an insect touches one of them, the halves of the leaf close, trapping the luckless insect, which the leaf then digests.

pedient of eating it up. The way in which they eat it is very interesting. Having encountered a germ, the corpuscle proceeds to flow around it. Little knoblike projections are pushed out of the corpuscle's body on each side of the germ; these meet on the farther side and join, so that the luckless germ is actually engulfed inside the body of the corpuscle. Once in there, it is soon digested and troubles our body no more.

Now one of the most curious and interesting facts in all biology is that this way of taking up food by flowing around it is exactly the way in which the ditch-water jelly-drop—the amœba—takes up its food. This tiny free-living creature not only looks just like our body guest, the white corpuscle, but also eats like it. And both illustrate the fact that living matter is made up of individual cells and that some kinds of these cells can live alone.

All Cells Made of Same Material

And not only are all living creatures alike in being composed of cells, but all these cells have inside them very much the same kind of material, a jelly-like substance that scientists call protoplasm. It has much the appearance of uncooked white of egg, though usually a little stiffer.

Living creatures are of the most diverse forms—a starfish, a snake, a man, a tree. One would not expect them to be composed of the same material. Yet they are. They are all made up of cells and all the cells contain protoplasm. So far as we can determine, it is very much the same kind of protoplasm.

How is this to be explained? Quite simply, if we accept, as most scientists do, the idea that all these diverse creatures are descended from a single ancestor, an ancestor who consisted of a drop of protoplasm living as a single independent cell in the primeval sea.


But, although the protoplasm of all cells appears to be much alike, you must not believe that it is *exactly* alike or that modern protoplasm is exactly the same thing as the original living matter. In the millions of years since life began on earth, protoplasm has changed just as everything else has. It has become more complicated. Different varieties of it have been developed to suit the kinds of work carried out by different kinds of cells.


Protoplasm Eats, Breathes, and Moves

The things that protoplasm does are enough to prove that it is complicated. The living cells composed of it are able to eat, to reproduce their kind, often to move about. All of them that have been investigated have another characteristic: They breathe. Human breathing is typical. You take air into your lungs. Oxygen from the air combines chemically with a certain substance in the red corpuscles of the blood. These corpuscles laden with oxygen are then carried to all parts of the body. They give up their oxygen to the body cells. These cells take up the oxygen and use it, giving back to the blood a chemical compound of oxygen with carbon, the compound called carbon dioxide.


This is what breathing always is: Protoplasm takes up and uses oxygen. It gives off carbon dioxide. Every animal breathes in this same way. Every plant does likewise. The one-celled animals, which have no lungs, breathe by taking up oxygen directly through their surface, just as the individual cells inside our body take it up from the blood.

(Continued on page 118)

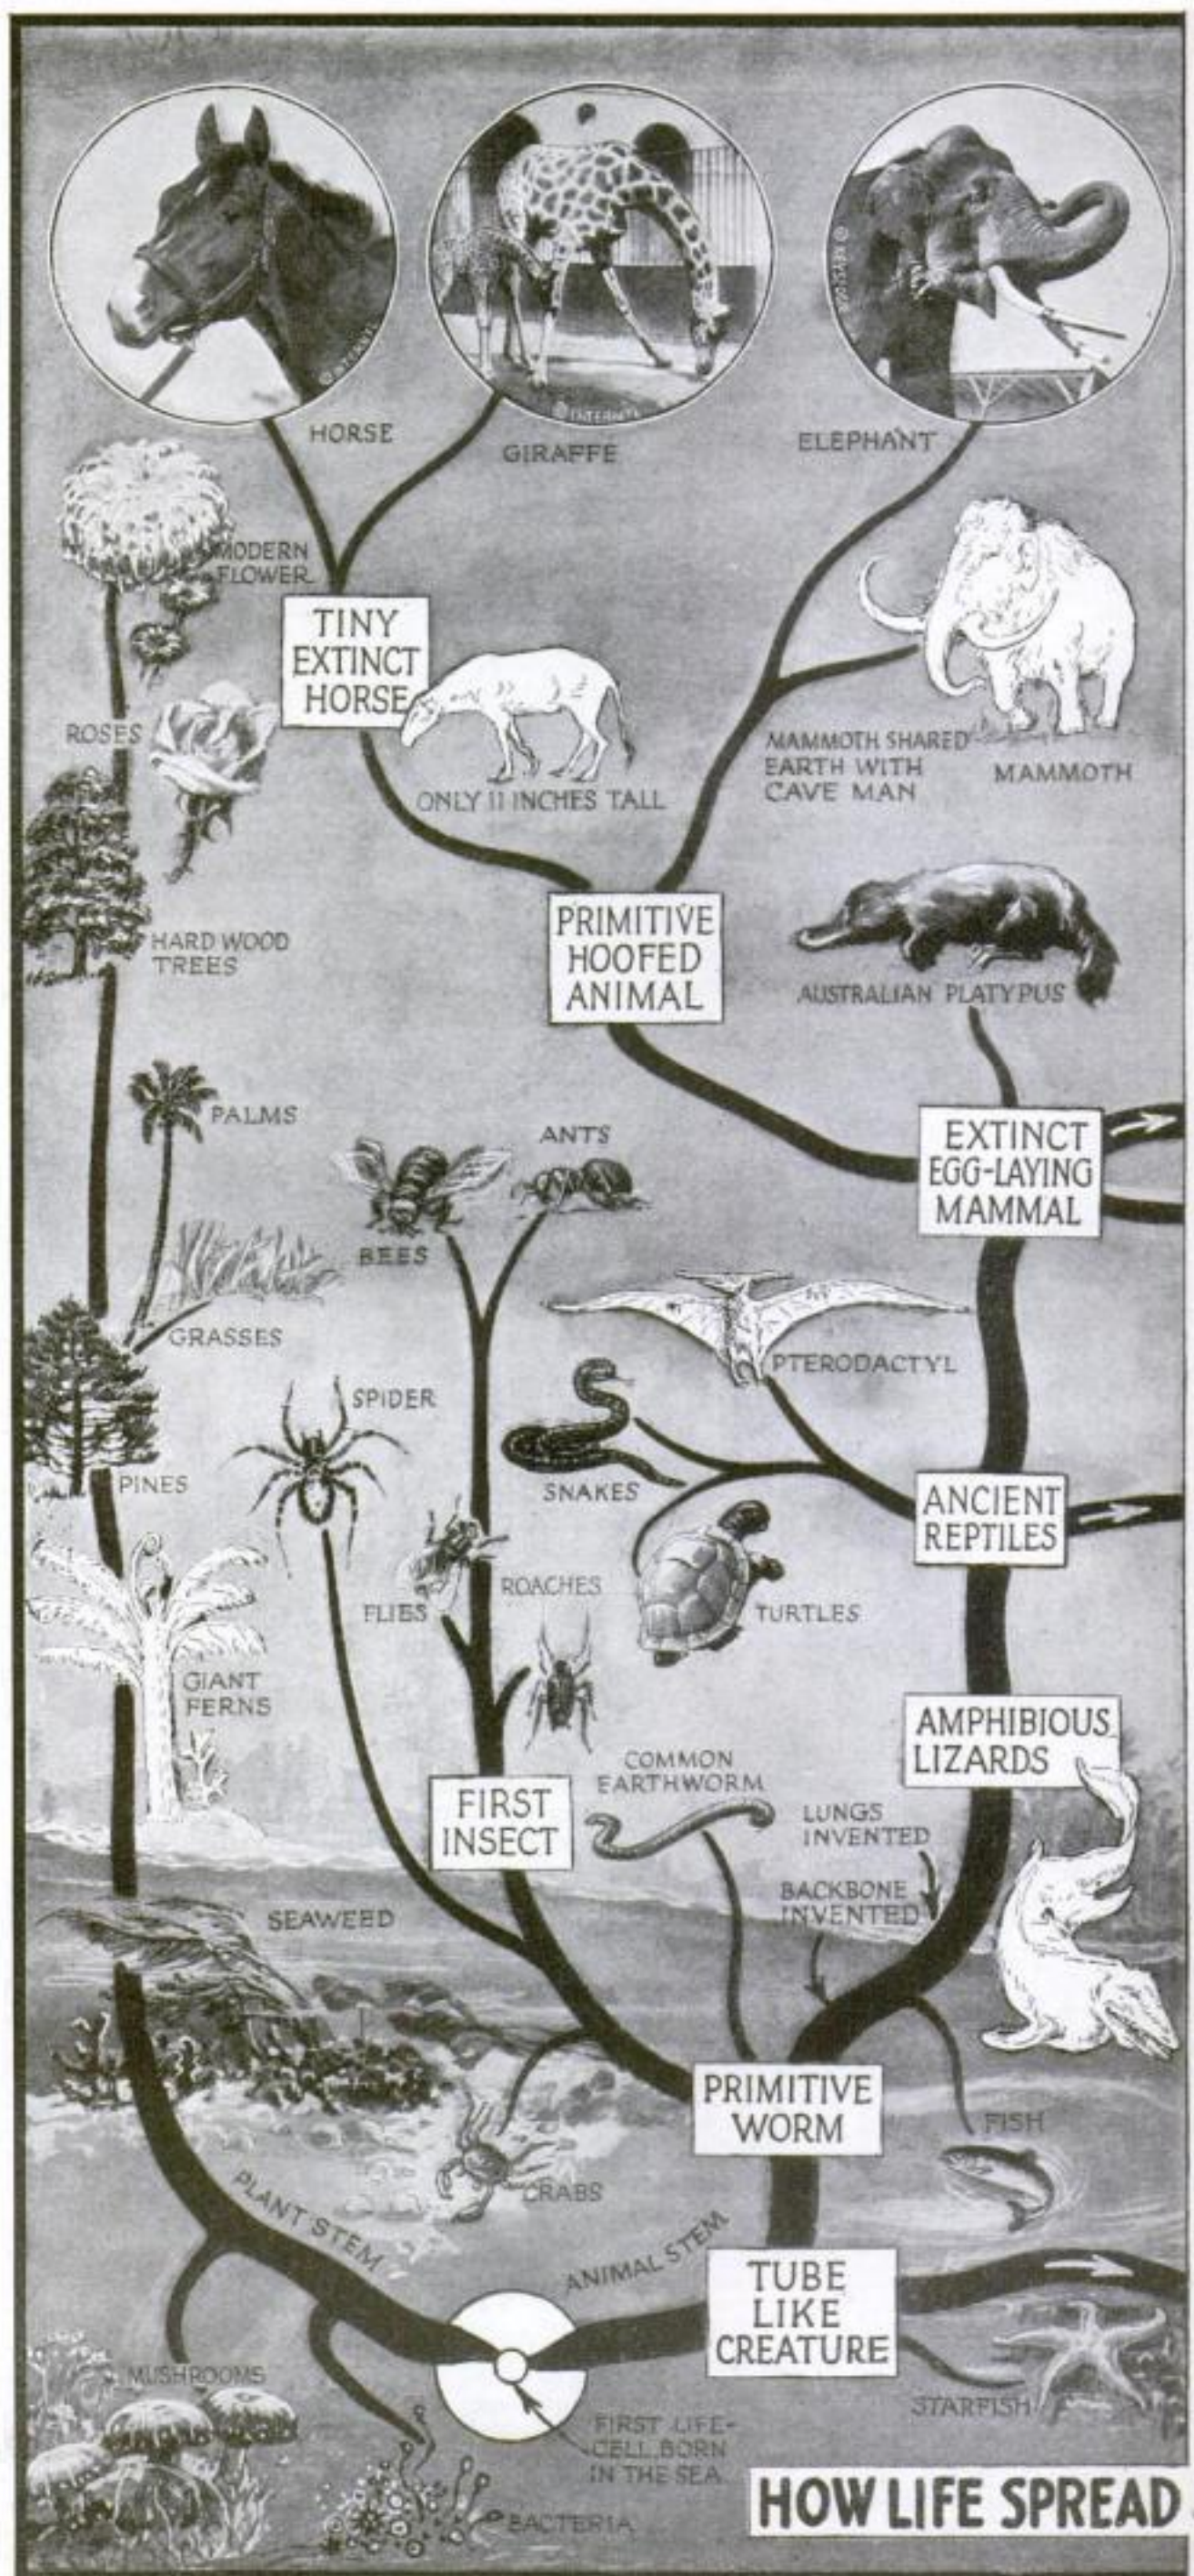

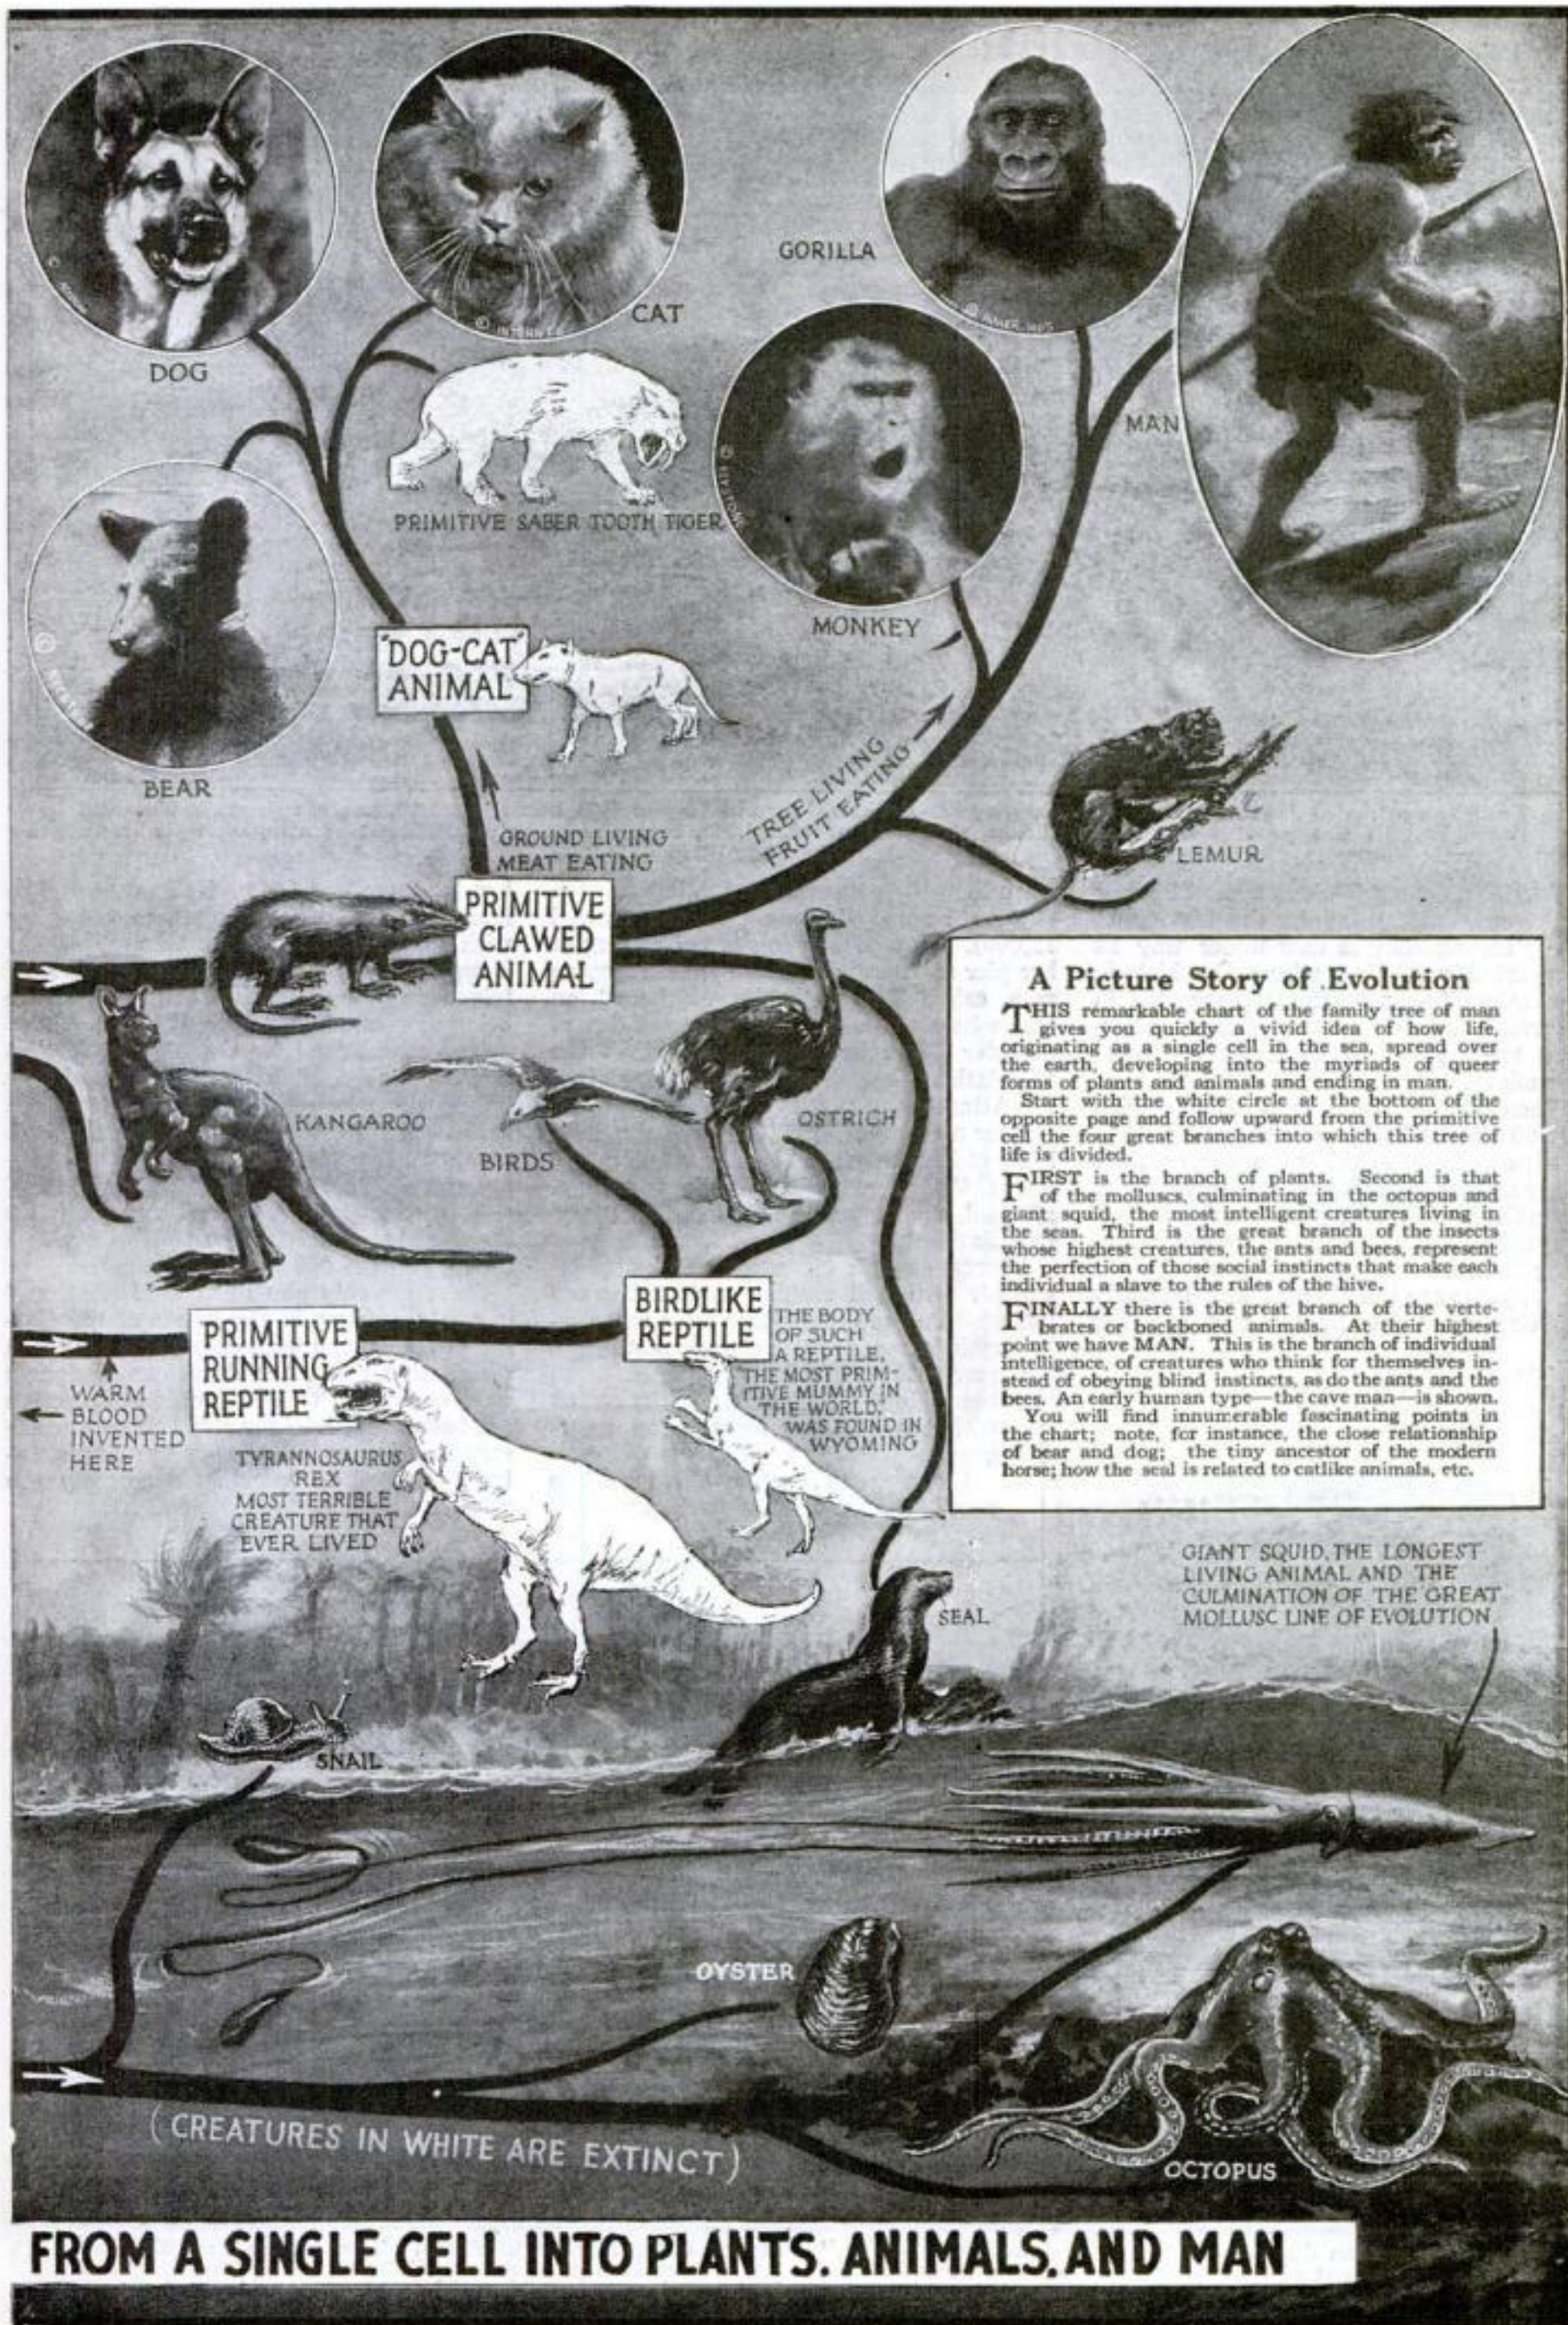

Historic "Leviathan" Becomes Queen of the Seas

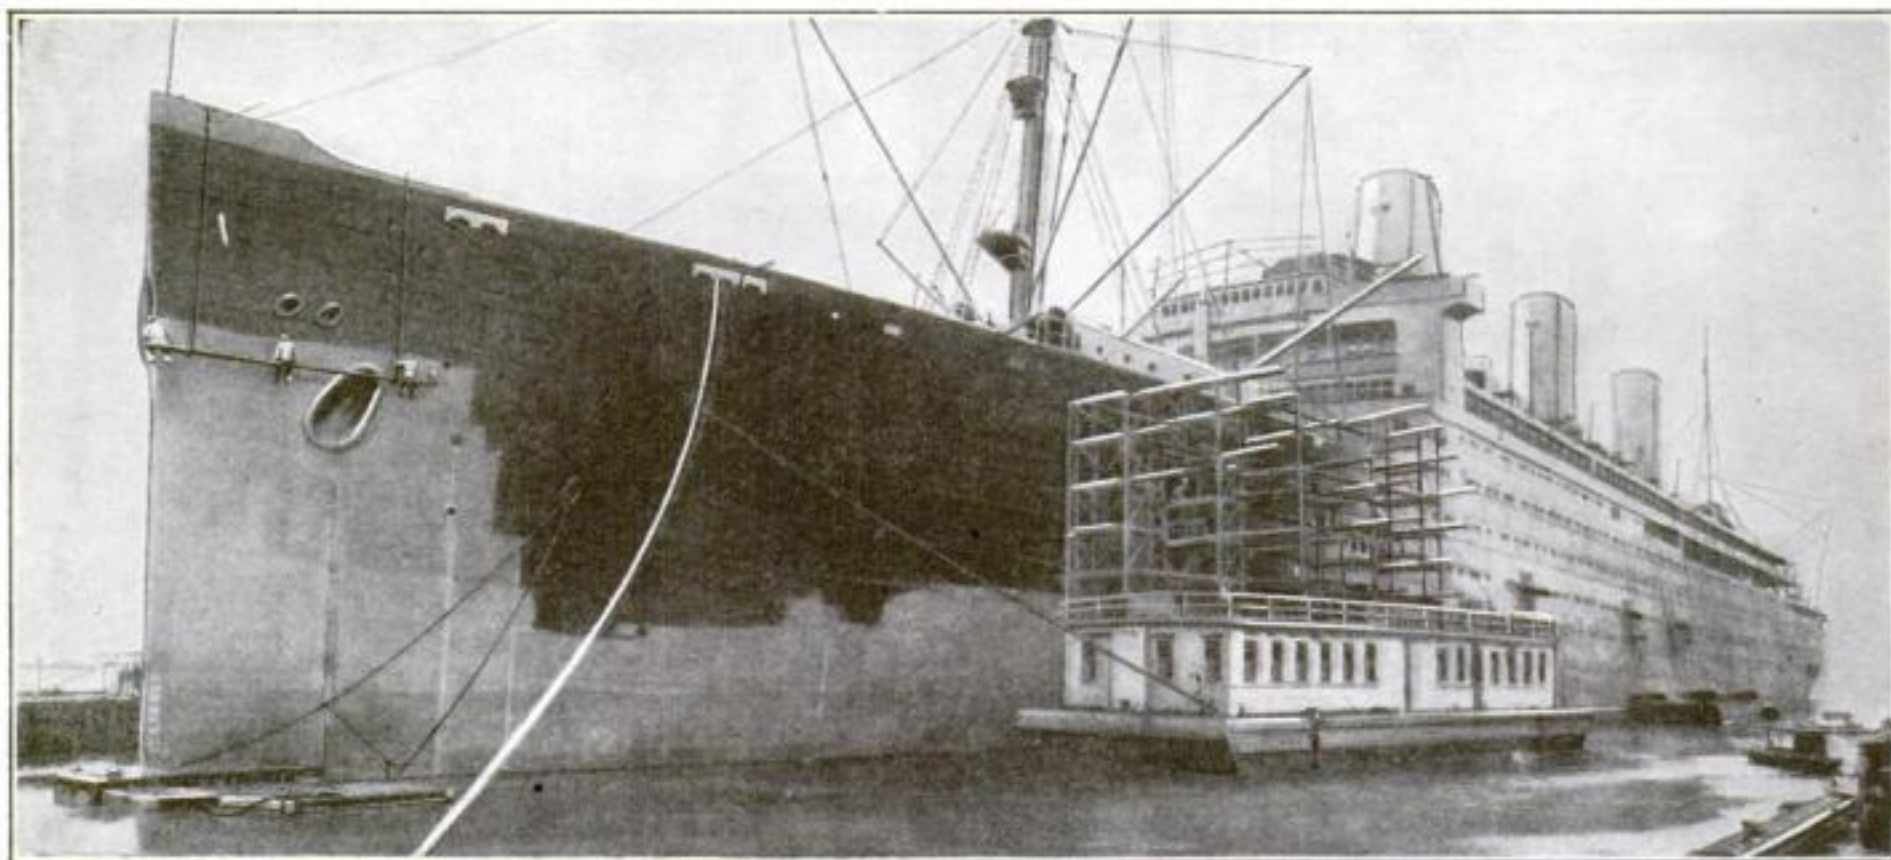

From troopship to floating palace—the mighty "Leviathan," second largest vessel in the world, as she appears at Newport News, Va., in the process of transformation, at a cost of \$8,000,000, into the most magnificent of all passenger liners

THE most stupendous task of its sort ever attempted in the history of shipbuilding is now under way at Newport News, Va., where the historic "Leviathan," next to the largest vessel in the world, is being converted from a battered troopship into the finest passenger liner afloat.

When the monster ship that carried 104,500 United States officers and men in 10 trips to France during the war, sets out on her maiden voyage as a passenger carrier under the American flag early in the present year, she will represent the last word in sea-going luxury.

Five years ago the "Leviathan," formerly the German "Vaterland," was carrying

more than 10,000 American soldiers on each trip to France (in one trip she carried 12,000). Two years ago she lay rotting at her pier at Hoboken, N. J., while shipping men called her a "white elephant" on Uncle Sam's hands. They said the day of monster liners had passed, and that the "Leviathan" might as well be towed into the Atlantic and sunk.

Now more than \$8,000,000 and the daily labor of 2500 men are being spent on her to prove that America's merchant marine, after all, can support a liner outclassing the world's finest.

Eleven electric elevators are being installed. Oil will replace coal under her boilers. To protect the ship from any possible increase of fire danger, marvelous new automatic safety appliances have been adopted to flood the boiler rooms with a smothering foam in an emergency.



Contrary to century-old maritime conditions, a "landlubber" architect

has been employed to re-design the interior. Her elaborate lighting fixtures will glow with 15,000 electric lamps. The entire ship is equipped with an intricate system of telephone communication, 600 instruments being connected on a central board.

To prepare food for the 5000 passengers and crew, seven complete galleys and four bakeries are being equipped. More than half a million dollars is being spent on the steward's department alone. For the dining rooms there will be 150,000 pieces of china and glassware. On every round trip the vessel will need three tons of tea and coffee, and 186,000 pounds of meat.

Since the only plans of the "Leviathan" in existence were in the hands of the German builders and were obtainable only at a prohibitive price, the American designers were compelled to adopt unique detective methods to remodel the ship. It was necessary to follow out all the wiring and plumbing lines and to ascertain accurately the sizes of hidden structural members.

© U & U.

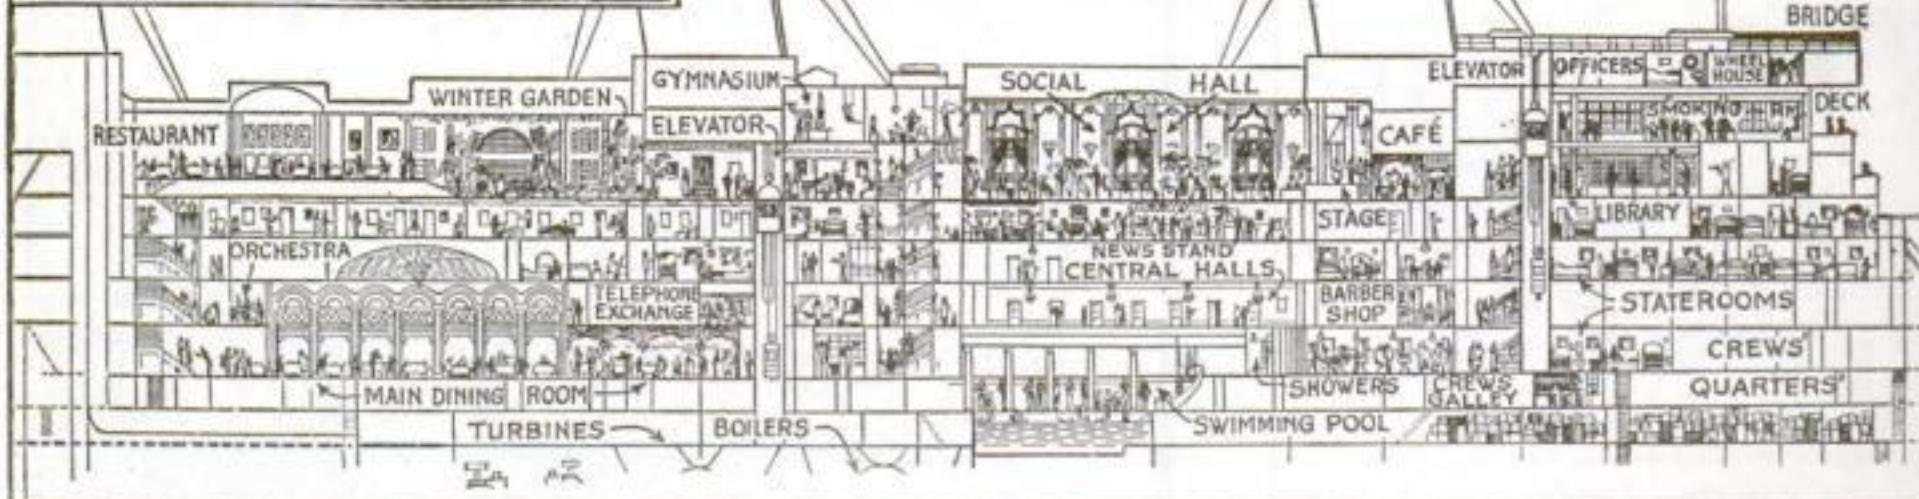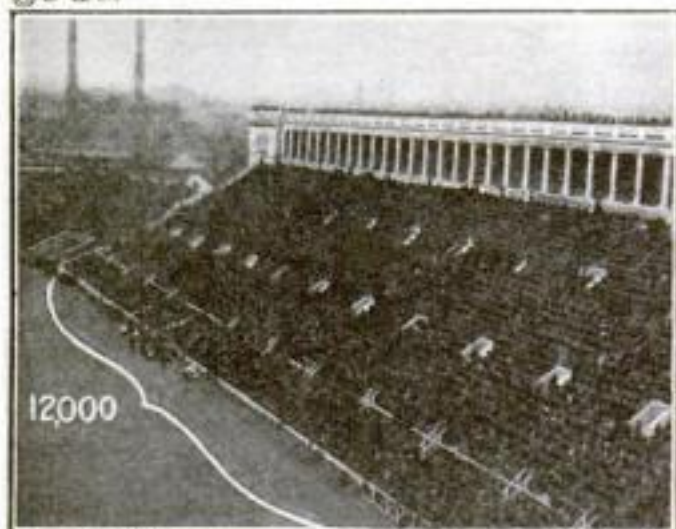

This cross section diagram of the re-designed "Leviathan," shows arrangement of luxurious passenger accommodations. On one trip during the war, this mammoth vessel carried 12,000 troops—a throng visualized in the larger inset, showing a

section of the Harvard stadium. The smaller inset illustrates her tremendous proportions—Columbus' flagship, the "Santa Maria," placed on end, would not reach top of "Leviathan's" funnels. White portion represents section shown below

Record Glider Revives Langley's Tandem Wings



The world's record flight of M. Maneyrol's tandem monoplane glider on the Sussex downs, England. Note the amazing altitude gained by Maneyrol by taking advantage of air currents (at right). Inset shows the glider nosing into the wind © Flight

By Lorry Jacobs

PREDICTIONS of two far-seeing American aeronauts have been remarkably borne out by the recent record-breaking motorless flight of M. Maneyrol, French airman, in a Peyret tandem monoplane glider in which he stayed in the air for three hours, 21 minutes, and seven seconds, winning the London *Daily Mail's* prize contest on the Sussex downs, England.

In the first place, the design of the machine that made this record follows the essential tandem lines of the famous steam driven "aerodrome" used by Prof. Samuel Pierpont Langley for the second successful flight in history, 26 years ago.

Secondly, the successful methods used by Maneyrol in piloting his glider fulfilled the promise made in the November *POPULAR SCIENCE MONTHLY* by Augustus Post, secretary of the Aero Club of America, when he said:



"During the period of increasing wind velocity, a pilot of the future will turn his plane head on to the wind and steadily gain height. As the wind decreases in velocity, he will turn at right angles. And at the beginning of a period of minimum wind speed, he will turn tail to the wind." It was this scheme of flying, combined with an advantageous and continuous updraft along the take-off hill, that won for Maneyrol.

"The flight resembled that of a bird," says an authoritative report, describing Maneyrol's per-

formance. "Every now and then the glider hovered with its nose to the wind. Sometimes the wind's velocity dropped and the machine began to glide downward and forward. The pilot then resumed his tacking. At other times the wind blew the glider backward slightly, but by 'diving,' Maneyrol got away from the hill 'where he took off.'"

While the tandem monoplane design of Langley has been little used in powered flight because the rear plane is far less efficient than the front one, Peyret realized that the tandem arrangement, when applied to a glider, facilitates control.

Structural details of the Peyret monoplane tandem glider, showing wing control

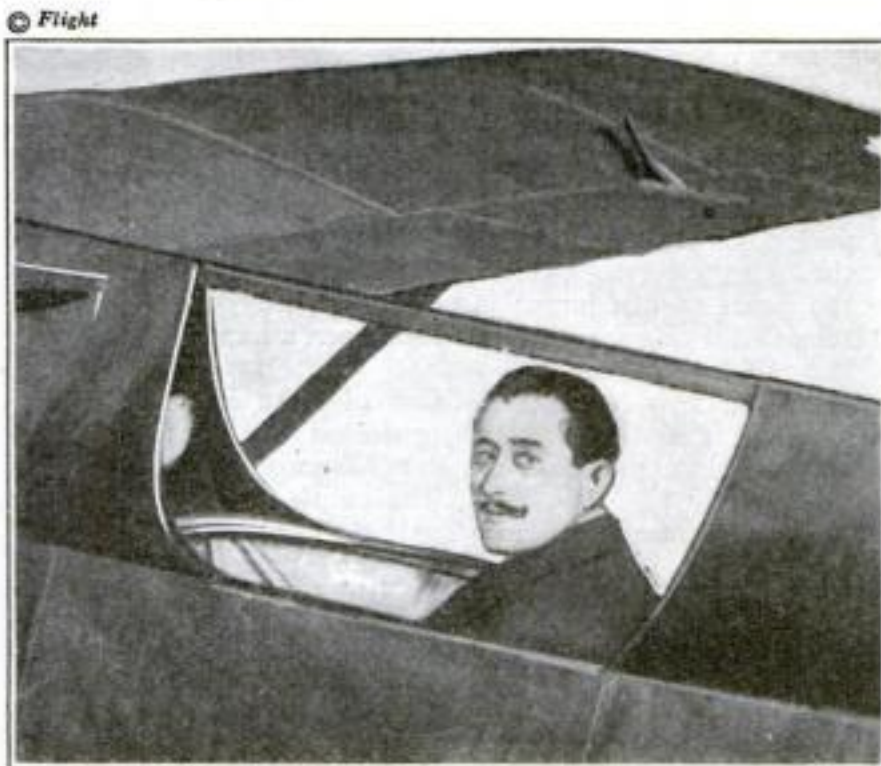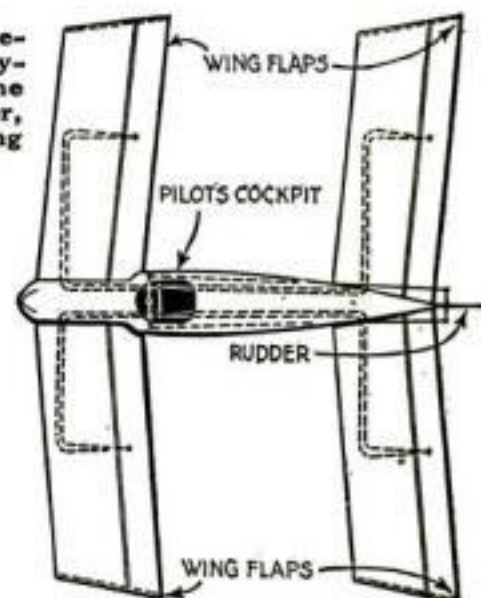

M. Maneyrol, in the cockpit of his Langley-type glider that recently remained in the air three hours, 27 minutes, seven seconds, establishing a new world's record

so that when the "stick," or control column, is pushed forward, the flaps of the front wings are raised and those of the rear wings lowered. When the stick is pushed to the left, the starboard flaps of both rear and front wings are depressed, those on the port side being elevated. Any combination of forward and sidewise movement of the control stick is possible.

Directional control is obtained by means of a rudder manipulated from a footboard.



Compact Oxygen Apparatus for Mountain Climbers

ADVENTUROUS scientists who recently attempted to scale Mount Everest in the Himalayas might have been successful if they had been equipped with a newly invented portable oxygen apparatus, designed especially for mountain climbers and aviators, which supplies just the right amount of oxygen at any elevation.

The amount of oxygen required by a mountain climber varies from 61 cubic inches a minute at 13,000 feet to 183 cubic inches a minute at 26,000 feet. Thus at any given elevation, as indicated by a barometer, the valve is set at a corresponding figure, allowing the correct amount of oxygen to enter the breathing bag. A small flap valve prevents exhaled air from entering the bag.

Inability to obtain sufficient oxygen resulted in the failure of the Mount Everest expedition to climb beyond the altitude of 27,364 feet. At the 23,000-foot level, one of the climbers became ill and oxygen was used more extensively; but because of the weight of the apparatus, progress was slow.

Storage Hopper Speeds Up Loader

BY MEANS of a storage hopper that can be adjusted to hold a specified quantity of material on a new tractor-loader, manufactured at Columbus, Ohio, batches of material in desired amounts are elevated to the hopper and held in readiness for the next receiving truck. The fact that the elevator is kept at work continuously greatly increases the capacity of the loader.

A universal swivel spout adds to hopper's efficiency.

Universal swivel spout from storage hopper spots material on the truck quickly



Elevated material is stored in hopper until truck arrives



Calendar-Desk Pad Fed from Paper Roll

EQUIPPED with a roll of paper such as that used with an adding or calculating machine, a handy desk pad recently placed on the market enables the user to record data, from day to day, on a continuous sheet of paper, much as stock quotations are recorded on ticker tapes.

The base of the calendar has a bronze finish.

When the exposed surface of the paper has been used up, the new surface is advanced by pulling on the end of the roll. The paper can then be torn off or left as a continuous record.

A permanent calendar attached in front of the roll can be used indefinitely.

Falling Ton Weight Tests Strength of Axles

SINCE a single defective locomotive axle may cause a disastrous train wreck, manufacturers submit a certain percentage of each batch of axles turned out to tremendous shock tests.

In the final test each axle is supported near the ends while a weight of 2240 pounds is dropped on it twice, the axle being turned through an angle of 90 degrees between the two shocks. These two blows are considered sufficient to reveal any flaws in the material that may have escaped notice in previous examinations.

The height from which the weight is dropped varies with the diameter of the axle. Thus, for a 6 7/16-inch axle, the weight would be lifted to a height of 41 1/2 feet and then dropped.



Locomotive axles are tested by a weight dropping on them


Dental Lamp Casts Light through Teeth



How light from the curved lamp passes through teeth under examination

DIFFICULTIES of dental diagnosis have been in part overcome by the recent perfection of a mouth lamp that passes light through the teeth. The fact that the light from the usual mouth lamps is not sufficiently intensive for this purpose has long been a handicap to dentists.

In the new lamp the source of light is a filament, and the rays are projected through a lens that produces intense illumination.

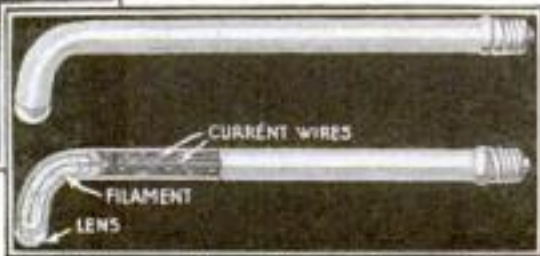

Light rays from filament, passing through a lens, are intensified

The lamp is curved, so that when placed in the patient's mouth, it projects the light at right angles directly through the teeth. Since the lamp tube contains a vacuum, the outside remains cool.

Drives Motorcycle out of Mud and Stops It with His Teeth



Holding in his teeth a cord that controls the motor through an ingenious cut-out switch, the cyclist starts the motor, then boosts the machine out of the mire



With handlebars tied, the machine goes straight ahead. To stop it, the cyclist need only stand still, for the pull on the cord in his teeth shuts off the ignition

BY THE clever use of stout twine and a cut-out switch, a Western motorcyclist has devised an ingenious method of extricating a stalled sidecar motorcycle outfit from heavy mud or sand.


The problem, as analyzed by this cyclist, whose work takes him into almost inaccessible mountain and desert country, consisted of finding a way to give the machine a "boost" while working single handed—operating the motor while pushing and lifting the machine—and also a means of stopping the motor once the machine was out of the hole. Here's the way he solved it:

To keep the stalled machine straight on its course, the motorcyclist simply tied the handlebars. Then, to prevent the machine's running away and

being damaged, he fitted an ingenious motor cut-out switch to the right handlebar. This device, a modification of the usual cut-out switch used by motorcyclists for making quick stops, is in the form of a leaf spring, which holds the cut-out switch in circuit, making it necessary to break the circuit to operate the motor.

In order to keep the cut-out switch circuit broken while the cyclist works behind the machine, a small block of fiber was inserted under the spring. To this a length of stout cord was attached.

Now, when his sidecar is stalled, the motorcyclist simply ties the handlebars. He then starts the motor, puts the machine in low gear, and engages the clutch, then jumps behind the machine to lift and push it out of the mire. In his teeth he

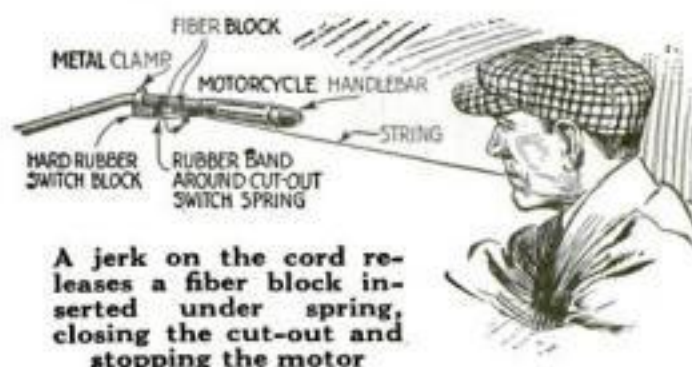

A jerk on the cord releases a fiber block inserted under spring, closing the cut-out and stopping the motor

holds the cord attached to the cut-out switch, and the machine goes ahead as long as he follows it. To stop it, he just stands still; for the cord held in his teeth will instantly pull out the fiber block and close the short circuit of the ignition system.


The plan might be applied to an automobile in a similar way

Mules Drive Wooden Geared Money Presses

WOODEN minting machinery more than 300 years old is still in use for coining medals in the government mint at Potosi, Bolivia. Although the wooden gear wheels resemble those in an old fashioned clock, and it might be expected that either the short wooden pegs or the ladder-like pins would be broken if the gear were called upon to transmit any large amount of power, excellent coins are struck with the

machinery. Eight mules provide the power and it is estimated 100 tons pressure can be applied to the dies.

This pin gear, as it is called, has become almost obsolete. It is still seen occasionally in clocks and in feeding devices on milling machines. Wherever wood must be used, however, the pin gear is the perfect design, since the strain is always applied at right angles to the grain of the wood.

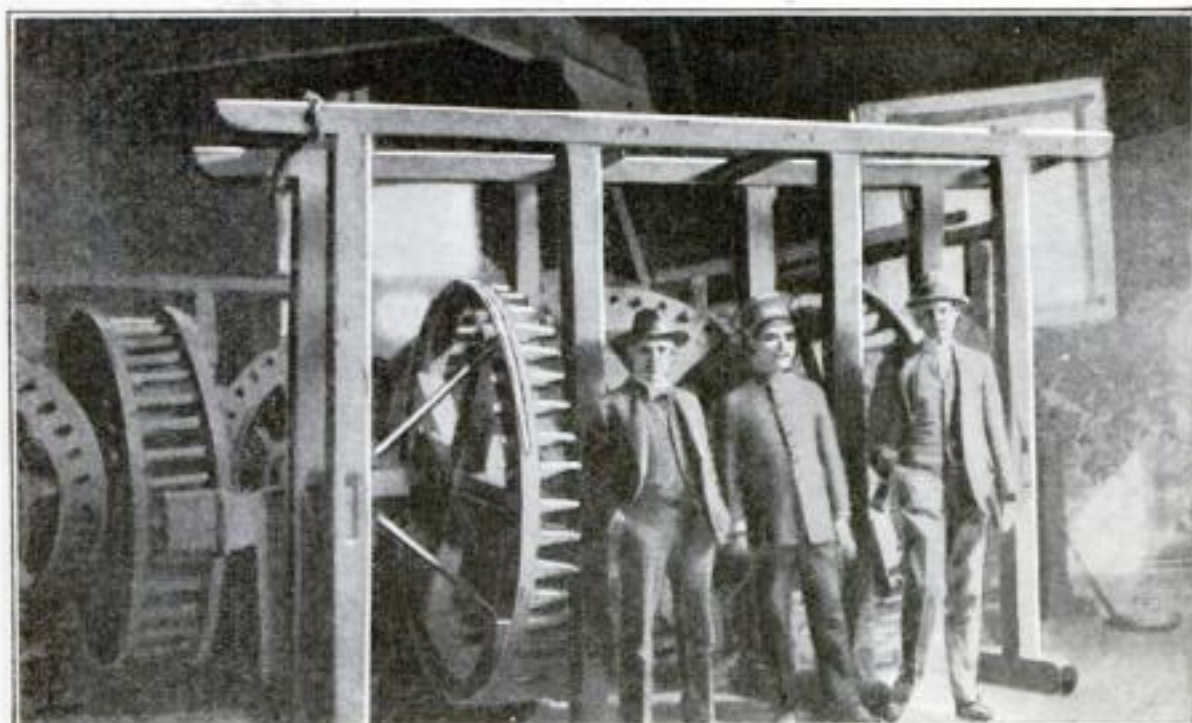

The ancient money press in the government mint at Potosi, Bolivia, showing pin gears resembling works in an old clock. This press is 300 years old



Snow Skating Latest Sport

A NEW winter sport has come to us in the form of snow skates, invented by Peter Barlow, of Minnesota, which can be used in gliding over snow only half an inch deep.

The wooden runner has a broad steel shoe and is fastened to the skater's shoe in the same way that ice skates are clamped. The turned up toe serves to pack down the loose snow and to prevent the skater from tripping as the skates sink in.


Double Glass for Storm Windows

A NEW method of equipping the home with storm windows, said to be more satisfactory than the present clumsy outside sash, has been devised by a concern in St. Paul, Minn., which utilizes the regular sash as a base for a second pane of glass.


The inside edge of the window sash is cut to receive a metal strip, the side of which is pressed into a groove to receive the pane. This strip is made up into a frame that just fits the window and is held in position by keys provided at several points along the edges.

The purpose of all storm windows is to provide a dead air space between two sheets of glass so that the amount of heat lost will be reduced to a minimum. While the old method of attaching additional windows during the inclement weather of the winter months has done this, yet there have been many opportunities for improvements from points of view of economy and beauty.

The new sash does not mar the beauty of a building and, because of this, it can be left in position at all times. The joints are so tight that no dust can penetrate to necessitate clean-

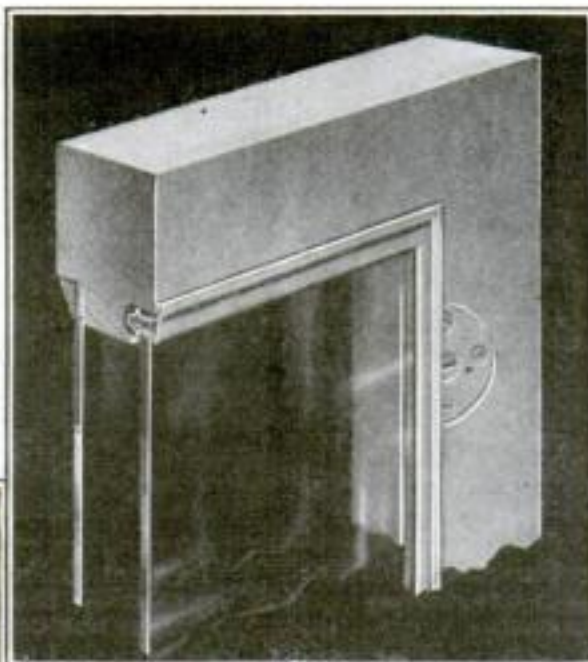

Above: Second pane of glass fitted into metal strip inserted in inside edge of the sash

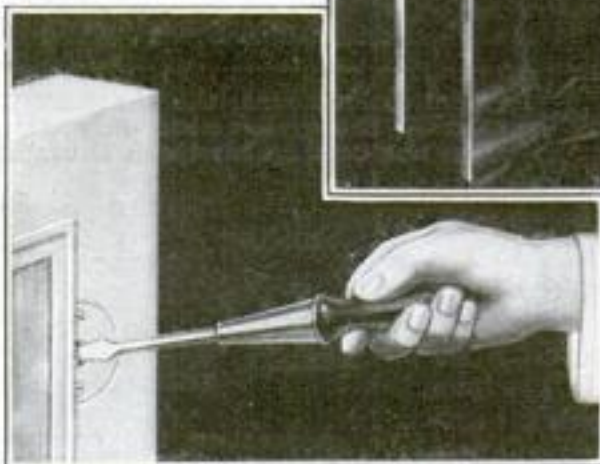

At left: Releasing storm window with screwdriver

ing the windows between the panes.

To remove the sash, it is necessary only to turn a screw in the key seat with a screwdriver. This releases the frame and the sash can be withdrawn.

While the sash is made in standard sizes and can be substituted for the ordinary sash in a standard window frame, the molding is especially designed for the storm glass frame.

Portable Stackless Stove Keeps Workmen Warm

FOR the use of workmen in small shops where there are no heating facilities, and in buildings under construction during the cold weather, a portable coke stove has recently been placed on the market by a manufacturer in Trenton, N. J.

The stove is made of cast iron and has a single opening at the side through which the coke is fed. An opening at the bottom provides the draft necessary for combustion. No stack is provided, since the stove is used in places where it is usually possible to discharge the flue gases into the atmosphere.



Coke is fed through square opening

Sixteen Million Books

FROM 10 to 20 million books have been published since the invention of movable type in 1454, some authorities placing the number more accurately at about sixteen and one half millions. These have been issued in the following order: fifteenth century, 40,000 volumes; sixteenth century, 570,000 volumes; seventeenth century, 1¼ million volumes; eighteenth century, two million volumes; nineteenth century, 8¼ million volumes, and 4 million since the beginning of the present century.

Two-Deck Bus Built Close to Ground

DESIGNED to increase safety and comfort for passengers, a double-decked city type motor bus of unusual strength and stability is being built by California manufacturers for interurban transportation.


To insure stability, the frame of the bus is set only 14 inches above the ground, while the gage of the car—the distance between wheel treads—is 70 inches. The frame of the chassis is of six-inch rolled structural steel channel, riveted at all joints.

The two decks provide seats for 46 persons—24 in the interior and 22 on the upper deck. Cross seats in the interior are reached

through side doors equipped with drop windows, while seats on the upper deck are reached by a flight of steps leading from the front end of the bus.

Drop windows of plate glass running in felt grooves disappear into the doors, which extend to the runningboard.

Driven by a four-cylinder gasoline engine of 62 horsepower, the car will develop a maximum speed of 49 miles an hour. Because of the exceptionally low center of gravity, the bus holds the road well at curves and is practically free from danger of overturning.

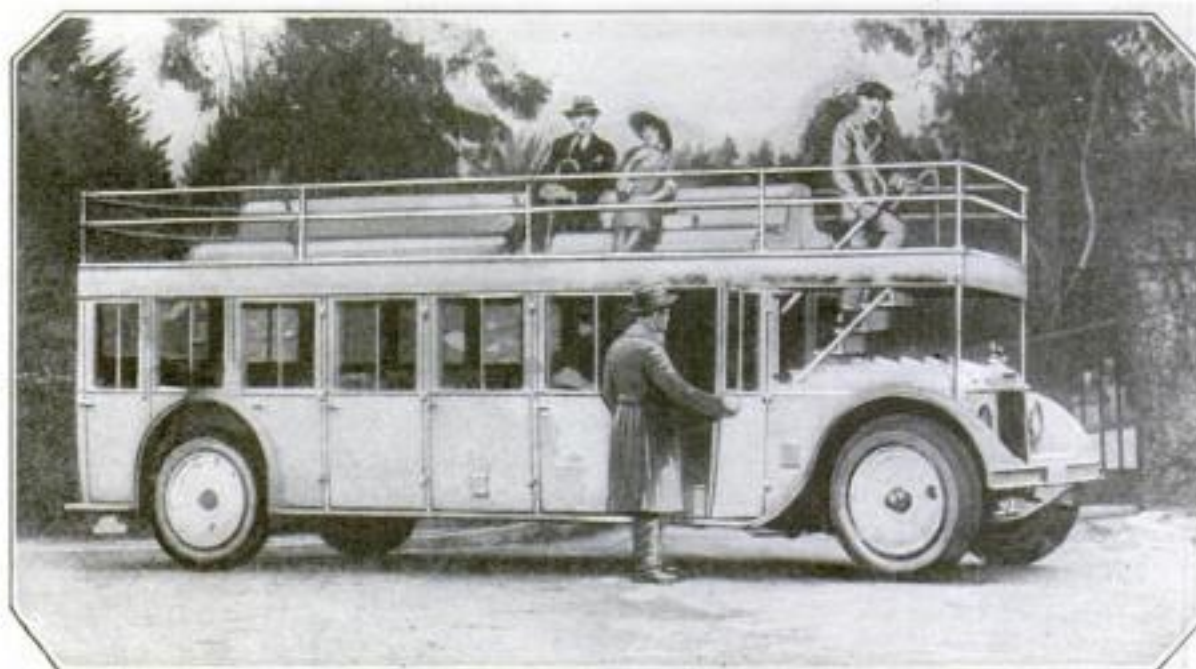

The double-decked safety passenger bus, showing low-hung body, stairway entrance to upper deck, and side-door entrances to interior



Cable Fence along Highway Protects Motorists

IF ALL highways were lined with a cable fence such as is used on the Lackawanna Trail in Pennsylvania, motor accidents caused by swerving off the road might be minimized and the number of deaths correspondingly decreased.

Two three-quarter-inch cables are stretched between posts on those sections of the highway that run along the side of hills or embankments. Thus, should a car strike the fence with sufficient force to uproot two or three of the posts, the cable, which is continuous, would still hold and would prevent the car from crashing down the declivity.

AS A special service to readers, the Editor will be glad to supply, wherever possible, the names and addresses of manufacturers of devices mentioned in this issue.

Special Home Saves Time for Fire Chief



Below the fire chief's rooms is his garage

THE San Francisco fire department is making new efficiency records by having a specially constructed residence for the fire chief, making it possible for him to attend a fire as quickly as the engines.

When there is a fire, an alarm wakens fire chief and drivers, and automatically opens garage doors.

Five Photos Are Taken on Same Plate

AN APPARATUS that photographs an object from five sides simultaneously, and on the same plate has been designed by the photographer of Johns Hopkins Hospital, Baltimore, Md.

The object to be photographed is placed on the floor and the camera positioned so as to obtain a direct view. Mirrors are placed



By means of mirrors, top and sides of the object are photographed simultaneously


on the four adjoining sides of the object so that a direct view of each of the sides is recorded on the plate.

The finished picture consists of a central main view and four auxiliary side views. In the old way, five separate exposures were required.

Lamp Attachment Provides Indirect Lighting

A NEW attachment for electric floor and table lamps makes it possible to obtain both a desirable diffused light throughout the room and the reflection of a brilliant light from the ceiling.

This indirect lighting adapter is provided with a screw that will fit into a socket in the top of the lamp, and is constructed of a translucent glass bowl surmounted by a reflector. When the adapter light is used,

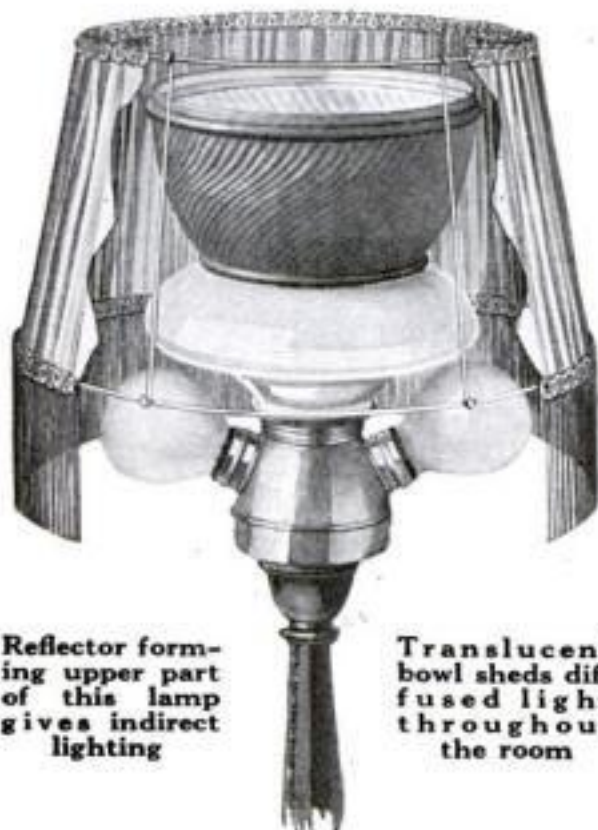

the lower bowl sends out a diffused light and the reflector sends light rays toward the ceiling.

With this new invention, any home can have indirect lighting, considered the best method of illumination from a hygienic point of view.

Origin of Righthandedness

THAT righthandedness developed when man began to use metal instruments during the so-called bronze age is the conclusion of Sarafin, eminent French archeologist, as the result of a study of implements used at various periods.




Bristles at Both Ends of Novel Toothbrush

A NEWLY invented toothbrush equipped with bristles at both ends, affords a means of cleaning teeth better than the ordinary brush.

The smaller brush is held in the handle by friction and can be removed instantly when it is desired to use the big brush. Thus it is kept from contact with the hand.

The small brush efficiently cleans the inner sides of the teeth and the surfaces between them.

Pullman Car Walls Built in One Piece

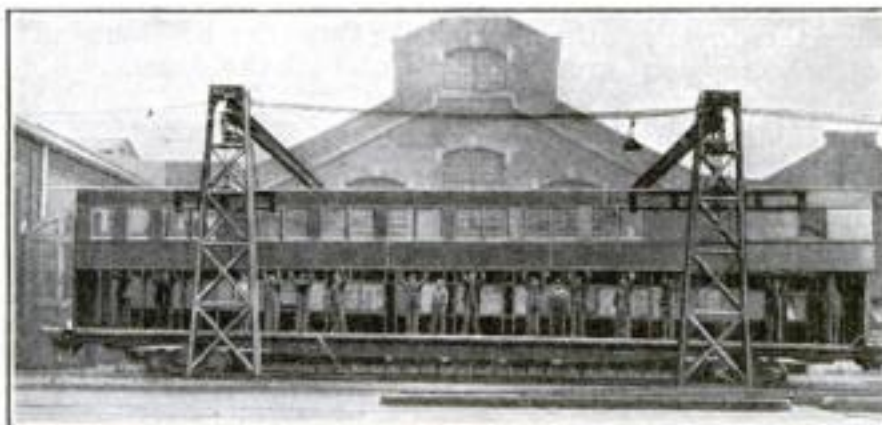

Sections are put together on the ground and hoisted into position by cranes and fastened there by gangs of workmen, who place the standards into their proper location.

BY BUILDING the longitudinal sections of Pullman cars in one piece, the manufacturers have added greatly to passengers' safety. Shop riveting is much more satisfactory than field riveting, it is found, with the result that the sections have a much greater power to resist impact.



"Thermos Bottle" Holds Molten Iron in Ford Plant

TO ELIMINATE double heating of metal used in auto castings, the River Rouge, Mich., foundry of the Ford Motor Company employs a container, operating on the principle of a thermos bottle, in which the molten iron, coming from the furnaces, is maintained at white hot furnace temperature until the casting room is ready for it.

The usual method has been to cast the molten iron into pigs made up of the proper chemical composition. These pigs are melted a second time whenever it is desired to make castings—a duplication that results in considerable loss of time and labor.

The new container, with capacity of 25 tons, consists of one cylindrical shell within another, the inner one being lined with firebrick. At each end is an opening, one to receive the molten metal, the other to act as a spout in pouring the castings. The low conductivity of firebrick makes it possible to keep the iron at white heat for five hours, during which time the contents can be used up for castings.

The proper chemical composition of the metal is obtained by tests of the iron in the container. Since the ore is not uniform, it is necessary to "doctor" it after smelting. Thus if it is found that a batch contains too little carbon, the metal in the container is mixed with a precise amount of cupola iron of greater carbon content. The result is the desired chemical composition.



HOLDING molten iron at white heat until ready to be transferred to the foundry, the "thermos bottle" container shown above in Ford's River Rouge plant, represents a striking advance over the usual method (at left) in which the molten iron is cast into pigs. These pigs are commonly allowed to rust in the open, then they are remelted for casting.

By the new method, molten metal enters one end of the container, and when wanted is poured from the other end into monorail buckets that carry it to the foundry.

Sander for Motor Bus Stops Skidding

MANY of the accidents caused by the skidding of motor cars may be prevented by the use of a sanding device invented by August Schon, of New York City, and successfully tested recently on New York municipal passenger buses.

This anti-skid apparatus consists of a circular drum, attached to the under side of the chassis in front of each rear wheel. The drum holds eight hermetically sealed containers in each of which are three pounds of sand.

The tripping of a lever near the driver's seat releases the sand. The sand, dropping

to the ground in front of the rear wheels, gives them an immediate grip on the road surface.

In fact, it is claimed that a bus carrying 40 passengers and equipped with the sanding apparatus can be stopped within three feet when traveling at a speed that would otherwise carry it nine feet with brakes set.


The apparatus can be attached to touring cars without interfering with the entrance to the tonneau, for the nine-inch drum can be mounted in front of the rear mudguard, the sand flowing through a hole bored in the runningboard beneath the drum.

Tests with this New York municipal motor bus, carrying 40 passengers and equipped with the sanding device shown at right, showed that the sand, poured in front of the rear wheels, stopped the car within a third of the usual distance after the brakes were applied.

Photo courtesy Motor



Attached beneath the chassis in front of each rear wheel, the sander consists of a cylindrical drum holding eight sand containers. A lever at the driver's seat releases sand from one container at a time.

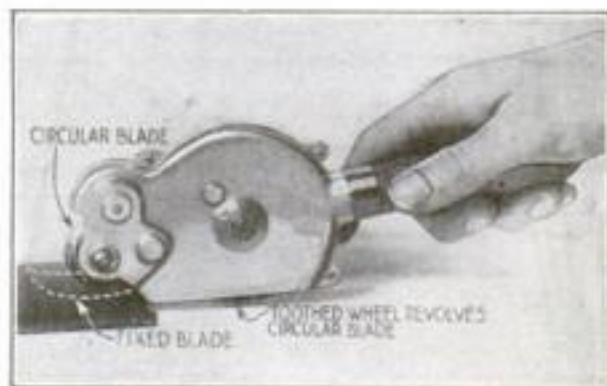

Rotary Scissors for Tailors

A NEW rotary cloth cutter, invented by John Holtzman, of Brooklyn, N. Y., has been designed to replace the shears as a cutting agent in large tailoring establishments, where it is said to turn out better work in shorter time.

It consists of a rotary cutter that presses, while rotating, against a fixed blade. This cutter is rotated by means of a toothed gear wheel, the lower part of which rolls along the surface upon which the cloth is laid.

Thus by grasping the handle and inserting the fixed blade of the tool under the cloth at the point where the cut is to start, then pressing down on the handle and moving in the desired direction, the operator can cut material in any pattern desired.

The new tool, while based on much the same principle as ordinary shears, is said to produce a cleaner cut.



Let a wall support legs as illustrated

Run around room on hands and knees

From kneeling position lower your chest to floor

Lie flat and raise each leg vertically

Lie flat and raise both legs vertically

Upside Down Exercises to Keep You Fit

Medical Expert Recommends Reversals in Posture to Stir Circulation of Stagnant Blood, Energize Under-Fed Nerves and Tone Sagging Digestive Organs that Have Grown Lax through Ages of Walking Erect

By Edwin F. Bowers, M.D.

Author of "Teeth and Health," etc.

IF YOU could hang by your heels or stand on your head a certain number of times every day, physicians now agree that you might guard against many annoying ills of later life, from which few of us suffered in childhood, perhaps just because we *did* stand on our heads or performed other similar feats.

The rather absurd looking, but really worthwhile exercises illustrated at the top of this page are urged upon us by health experts, to remedy the slumping of our internal organs caused by today's unnatural modes of living. The chief health benefits of thus figuratively "standing on our heads" are these:

It exercises blood vessels and stirs normal blood circulation through bodily tissues, thereby stimulating the natural processes of repair.

It puts elastic "tone" into the blood vessels of the brain, so that nutrition of the brain cells and elimination of waste become normal, and the maximum mental efficiency is achieved.

It tends to draw back into proper position abdominal organs that have fallen from their normal place.

Finally, it stirs to activity a vital, little known watery substance—the cerebrospinal fluid—that should normally bathe the brain and circulate through the spine, but tends to become stagnant.

To the fact that we walk about on two legs, instead of running about on all fours,

may be traced the ills that these exercises overcome. Indeed, when some apelike ancestor of ours, millions of years ago, first awkwardly elevated himself on his hind legs, thus first setting for mankind the fashion of walking erect, he sowed the seeds of a host of human ailments, although at the same time he made possible the development of our hands, brain, and speech—the sources of all civilization.

The erect posture changed the center of gravity of our internal organs, causing the stomach and intestines to hang unnaturally from the backbone, by tissues that have a tendency to relax, and let them sag downward into the abdominal cavity.


This relaxed condition, so doctors of all schools of medicine are now agreed, is responsible for, or contributory to, scores of the common ailments from which we suffer more or less all our lives.

A Source of Many Ailments

When we have "the blues," or a bad temper, or suffer from headache, dizziness, insomnia, nervousness in its thousand and one forms, indigestion, flatulence and obstinate constipation; when we wear a worried, haggard look; when our skin is sensitive to the touch, and either abnormally dry or profusely covered with sweat; when general catarrhal symptoms manifest themselves and bodily resistance to disease is lowered, we may be suffering from nothing more or less serious than this fallen state of the heavy organs of digestion.


If you will realize these facts, you may take more seriously than the average man

does the various sets of exercises prescribed by physicians and physical culture experts—the phonograph record exercises now popular and the outdoor sports of golfing, swimming, and rowing. In fact, so important is the problem that an osteopathic physician of New York, Dr. William West, has recently invented a mechanical device called the "gravitiser," a gravity couch which, he

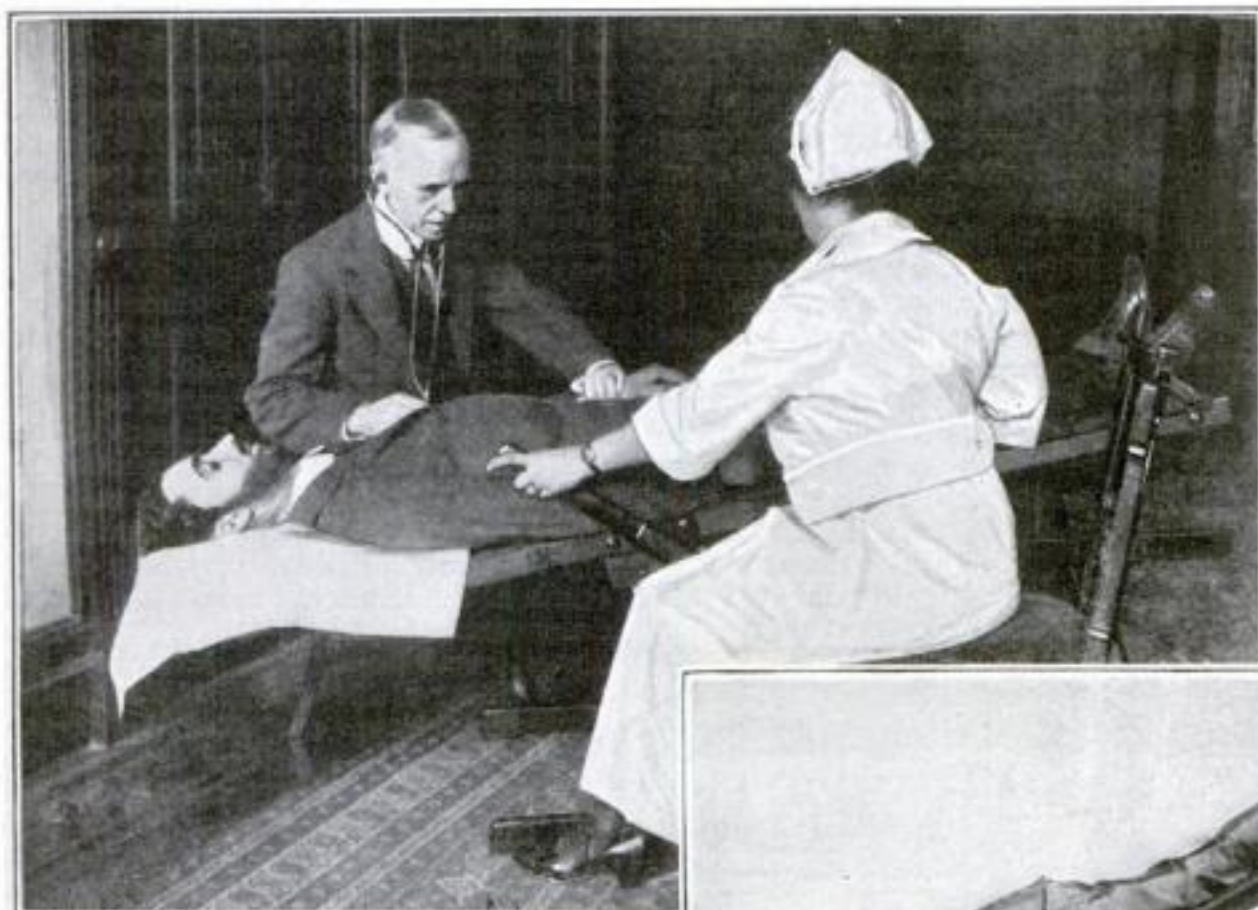

A Blood-Stirring Gravity Couch

SUPPLEMENTING the exercises shown at the top of the page, this tiltable table or "gravitiser" has been devised by Dr. William West, osteopathic physician of New York City, to relieve ailments traceable to our failure to exercise blood vessels and bodily organs by varying our postures. Lying outstretched, as shown above, the patient's body is inclined head downward for a specified period. This movement the patient himself may control by means of a lever with adjustments providing for 40 different degrees of inclinations

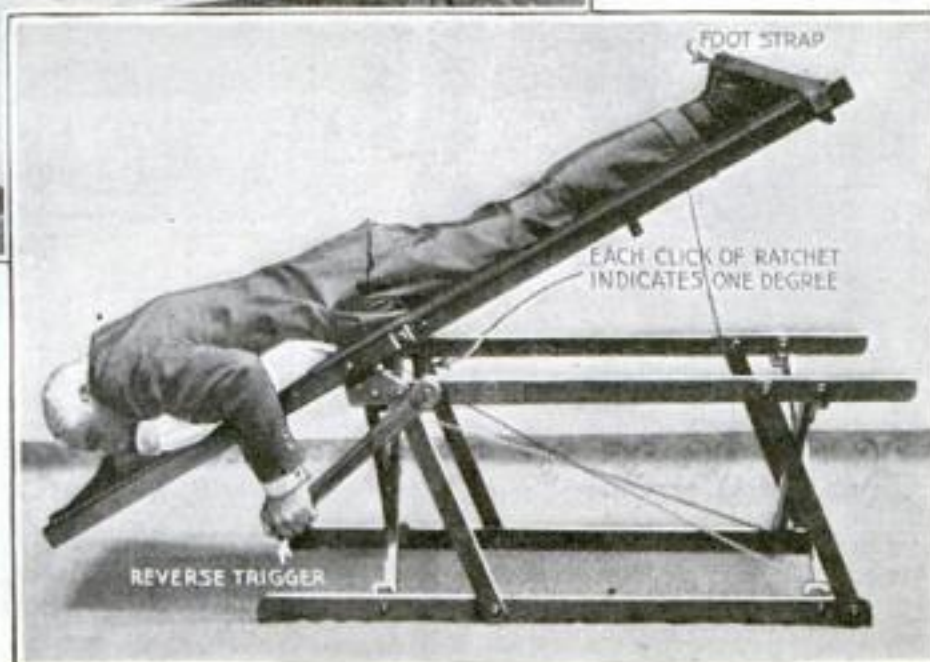

claims, relieves many ailments that may be traced either directly or indirectly to our failure to exercise blood vessels and organs of the body by varying our postures.


Physicians detect a condition of fallen stomach and abdominal organs by a medical examination in which the positions of the abdominal organs are outlined by tapping the body, or by administering food containing a bismuth compound. In the latter case, X-ray photographs show the shadows of the metallic element in an abdominal cavity. When we suffer a falling of the intestines, the liver, spleen, and kidneys are usually also involved, complicating the situation by becoming sluggish. Thus it is that bowels lose their "tone," slowing up the wormlike motion of the muscles of the intestinal walls that finally pass intestinal debris out of the system, permitting the accumulation of quantities of waste matter in the bowels. This in turn results in the absorption of poisons developed by decomposition of the accumulated matter.

Causes of Falling Organs

A general falling of the organs (called "visceroptosis"), involving the large nerve network, or nerve center, in the abdomen—second in importance only to the brain itself—may produce any one of a wide variety of diseases.

Falling of the stomach and abdominal organs occurs among all civilized peoples. Among its causes are the wearing of corsets, girdles, and other clothing that distorts the body; improper breathing, sedentary habits and lack of exercise, inadequate rest, high heeled shoes, overeating, overdrinking, excessive use of tobacco or other narcotics and stimulants, or plain worry.

In extreme cases of falling of the stomach and abdomen, the bowel, instead of slipping down like a solid structure, collapses upon itself as if it were a wet cloth thrown into tubular form, creating folds, creases, and

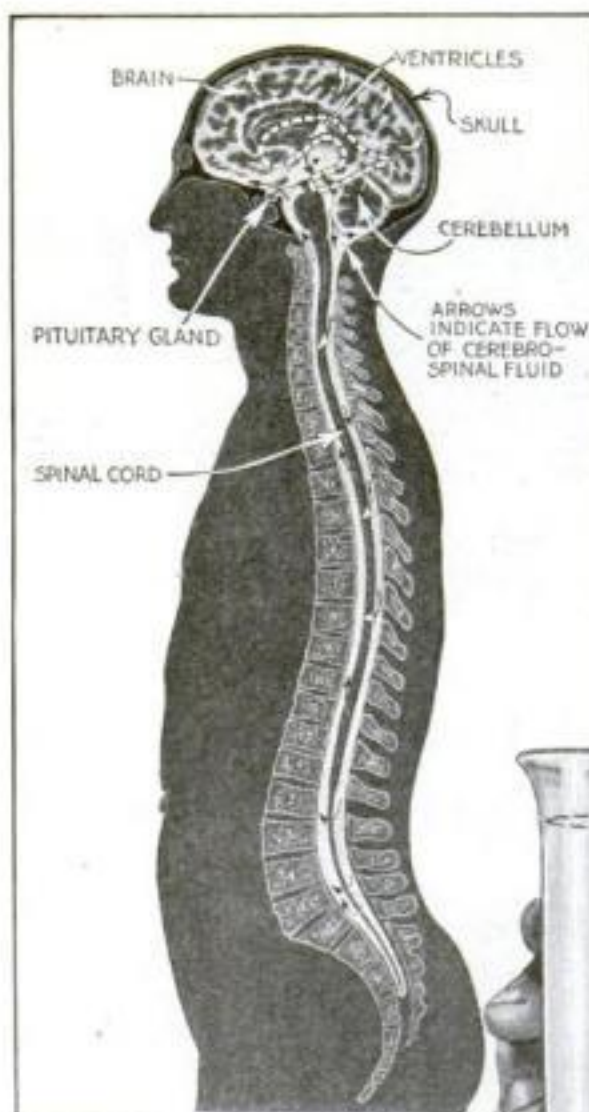

A Health Giving Fluid

Showing how the cerebrospinal fluid, possessing mysterious health-giving properties, normally bathes the brain and spinal cord. Unless stimulated by exercises, this fluid stagnates, causing mental and physical depression




In health, your body should contain about 80 cubic centimeters—about two tenths pint—of cerebrospinal fluid. A serious excess may cause illness

wrinkles that frequently cause acute illness or chronic distress. Even the normal person may realize in a degree the effect of a falling abdomen or stomach. Let some one stand behind you, raise your abdomen and support it for a few moments. You will experience a feeling of lightness and buoyancy vastly different from the dragging, heavy sensation that follows when the lifting support is removed, and the abdomen is permitted to sag into its usual, but unnatural position.

In addition to the exercises of stooping, twisting, and turning that have been recommended by physical culture experts, an excellent method of strengthening the ab-


dominal muscles, and one that any person can practice easily, is this: Lie flat on the floor and slowly raise your feet and legs until they form a right angle with your body; then slowly lower them, at first repeating the exercise only ten times, morning and night, gradually increasing the number to thirty, or even forty times. Here are other simple exercises that will prove helpful: Walk around the room "on all fours." At intervals assume the "knee-chest" position—that is, while in a kneeling position on a bed, turn your head to one side and lower your chest to the bed. Lie with knees flexed and massage your abdominal organs, always taking care to force the organs upward. Supplementing such exercises as these is the gravity couch, or tiltable table, upon which the patient lies outstretched, and by means of a lever inclines his body, head downward. It is equipped with adjustments to provide for 40 different degrees of inclinations that progressively increase the influence of gravity on the body, one degree at a time. The device makes use of the principle that the blood in the human body, since it is inclosed in elastic and nerve-controlled tubes, is not instantly influenced by gravity when the position of the body is reversed, but responds only after the lapse of five seconds. Thus, because the walls of the blood vessels do not release their tension until five seconds after the patient's body is inclined, the device may be used safely within that time, to exercise the blood vessels and bodily organs to the limit of their endurance.

In whatever portion of the body the blood flows, or can be made to flow, by gravity, the natural processes of repair are stimulated; for this flow restores circulation in tissues where blood circulation has been feeble and inactive. Nerve cells that may have been starved or poisoned are fed and stimulated. Blood vessels in remote canals of the bones are reopened. Indeed, every organ of the body is energized by the flow of blood through it. Meanwhile, the tilting of the body backward swings the stomach and abdominal organs back into their normal positions and tends to maintain them in these positions by strengthening the supporting tissues. It is claimed that the blood vessels of the brain are thus exercised, tending to relieve depression, and restoring mental efficiency. Finally, the watery fluid that bathes the brain and spinal cord is stirred into activity. Remember that our spinal cord and brain are entirely surrounded by this cerebrospinal fluid. Exercises such as suggested in this article, stimulate the normal activity of this life fluid in the brain and spinal column, thus helping to banish disease, strengthen resistance, and increase our good spirits and efficiency.

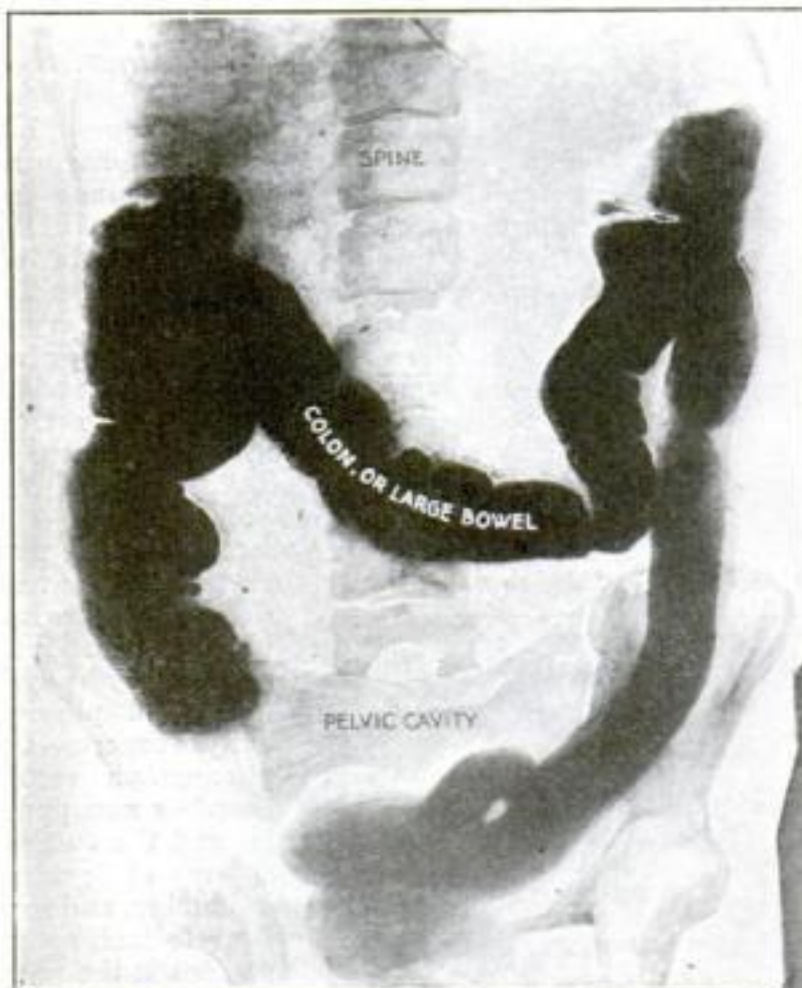


One Result of Erect Posture

THE above X-ray photograph of an extreme case of fallen abdominal organs. When compared with the normal position diagram at right, shows how the large bowel collapses upon itself through lack of proper exercise, creating creases and wrinkles that clog the abdominal passages and often cause acute illness by the accumulation of waste

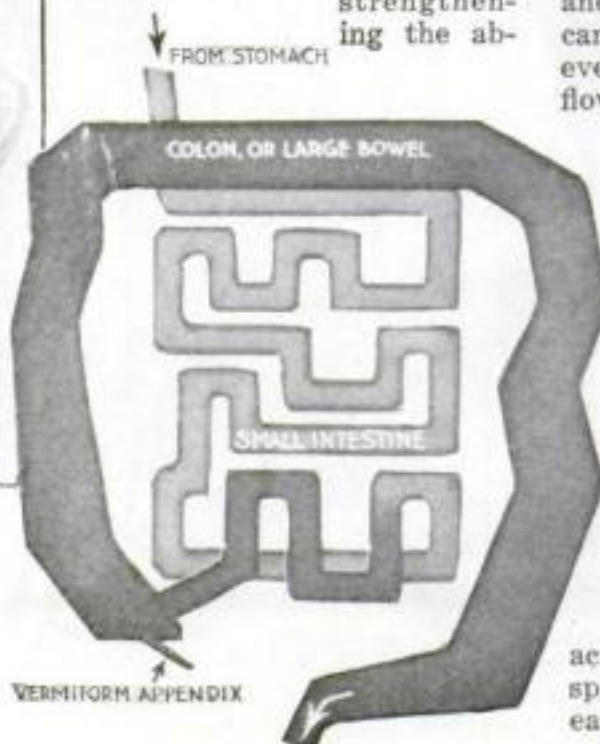

Mammoth Stadium Will Hold Babe Ruth's Longest

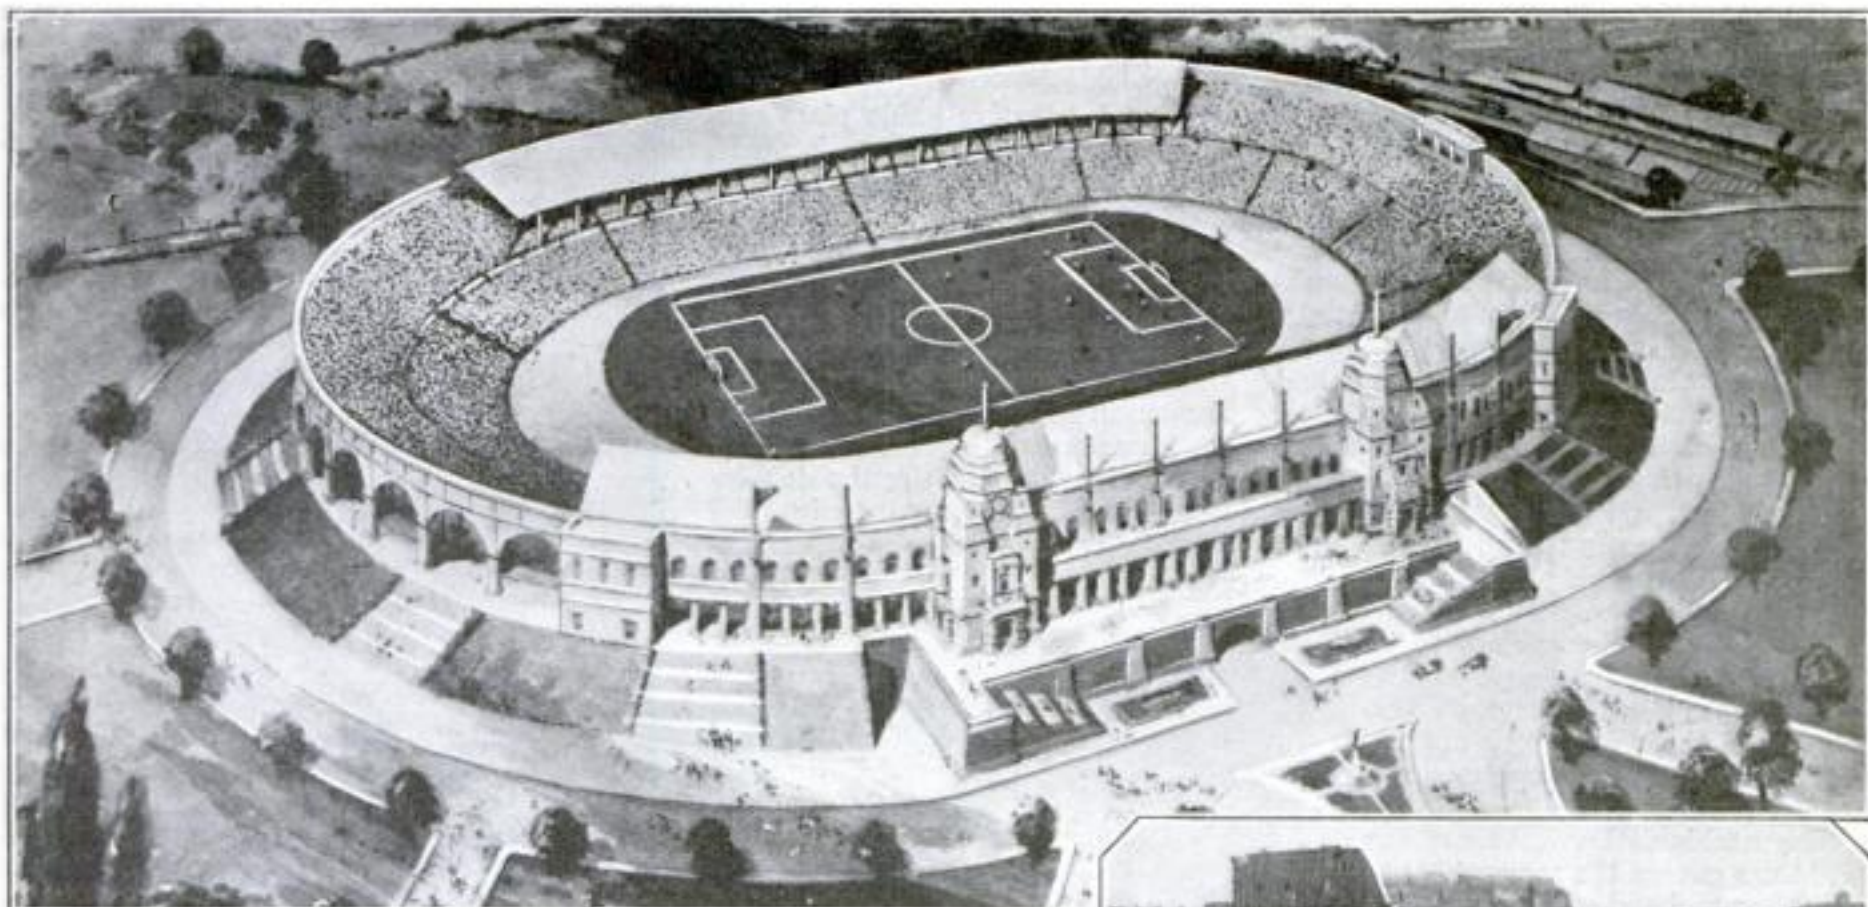

This modern super-amphitheater, the Imperial Stadium at Wembley Park, near London, will accommodate 126,000 spectators—80,000 more than did the ancient Roman Colosseum, shown in ruins at the right

THE Roman Colosseum, which stood for centuries as the greatest amphitheater in the world for the presentation of sport spectacles, is to be dwarfed by two huge modern stadiums, one of which will accommodate three times as many persons, while the other will have twice the capacity.

They mark a double climax to the two decades that have passed since dedication of the Harvard Stadium in 1903, and that have witnessed construction of the Yale Bowl, the monster stadium at Ohio State University, and numerous other outdoor theaters for the athletic spectacles of which the American public is so fond.

The greatest arena of modern times will be England's Imperial Stadium now in construction at Wembley Park, near London. It will accommodate 126,000 persons, all of whom will have a clear, unobstructed

view of the playing field, although only 35,000 will be seated. In actual seating capacity this British amphitheater will be surpassed by the new American League baseball stadium in New York, now nearing completion, which will seat 85,000 persons for baseball games, and perhaps 15,000 more for football, fights, or other athletic exhibitions.

The Colosseum, most famous of all structures used for gladiatorial spectacles in the days of Rome's glory, accommodated about 45,000 spectators, according to estimates, although not more than 30,000 were seated.

The new Wembley stadium, which will be the center of all great English national ath-



letic contests, and perhaps the site for the Olympic games, will cover $2\frac{1}{2}$ times as much ground as the Colosseum. The outer wall will be half a mile in circumference.

The American League stadium, seating more spectators than any structure in the world, will cost \$2,000,000. The field alone would hold two of the arenas in which gladiators amused the Roman public in ancient days.



No chance for Babe Ruth to knock a ball "out of the lot" in the new baseball stadium of the New York Yankees, shown above. This is now the greatest of modern amphitheaters, seating 85,000 spectators for baseball games and 100,000 for other athletic contests

Improved Photo Sculpture Creates Masterpieces

SURPRISING simplifications of the English invention by which a specially taken photograph is reproduced in bas-relief on alabaster, ivory, or wood, have been made since the photo sculpture machine was first described in the October issue of POPULAR SCIENCE MONTHLY. By increasing the accuracy of the process, the new improvements have achieved astonishing perfection in detail, as shown in the photo bas-relief on this page.

It will be remembered that in the method described in POPULAR SCIENCE MONTHLY a beam of light is projected from a magic lantern on a person's face or on a statue to be reproduced, a lined glass plate being used in the lantern in the place of an ordinary slide. This glass plate projects spiral lines, like those of a phonograph record, on the subject to be reproduced. A photograph of the subject is then taken, and on this photograph the spiral lines appear. From the negative, a print is made on opal glass, which is used to guide the carving machine. Deviations of the spiral lines govern the movements of the cutting tool and so reproduce the photograph in bas-relief.

Glass Negative Guides Tool


The improved machine works on a similar principle, except that parallel lines instead of spiral lines are used, while instead of the opal glass print, the glass negative itself can be used to guide the cutting tool.

Mounted on a massive, sloping bed plate, the new sculpturing machine is operated by two electric motors. A horizontal motor drives a sliding frame that carries the carving tool and moves on a horizontal plane over the material to be carved. The other motor, mounted above the cutting tool, rotates it at high speed.


A two-handed control shaft is geared both to the vertical shaft on which the

cutting tool is mounted and to the sliding frame, which carries a pair of microscopes.

After a negative guide plate containing parallel guide lines is made, the sliding frame is swung upward, and the negative plate is clamped to the bed plate, and the material to be carved is also held firmly by clamps. The sliding frame is then lowered and the vertical motor started, causing the drill to rotate at high speed. The horizontal motor then is started and the frame begins to move from left to right. By manipulating the double-handled shaft, the operator brings the intersection of cross hairs in the mi-

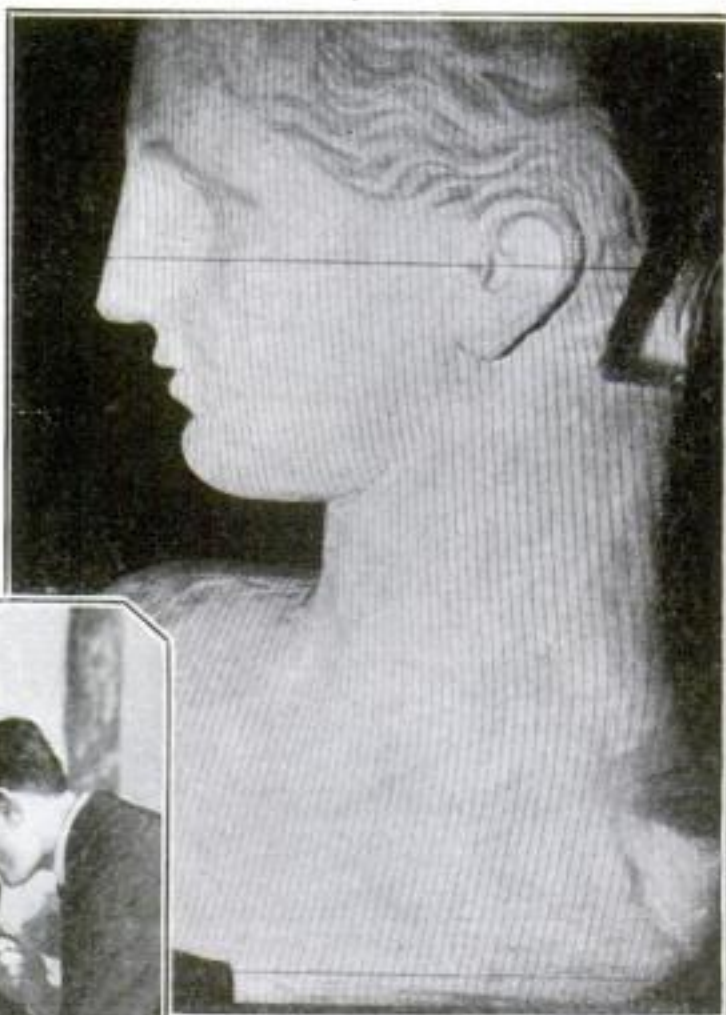

Above is a negative used in carving a sculptured reproduction from a photograph. Parallel lines guide the cutting tool

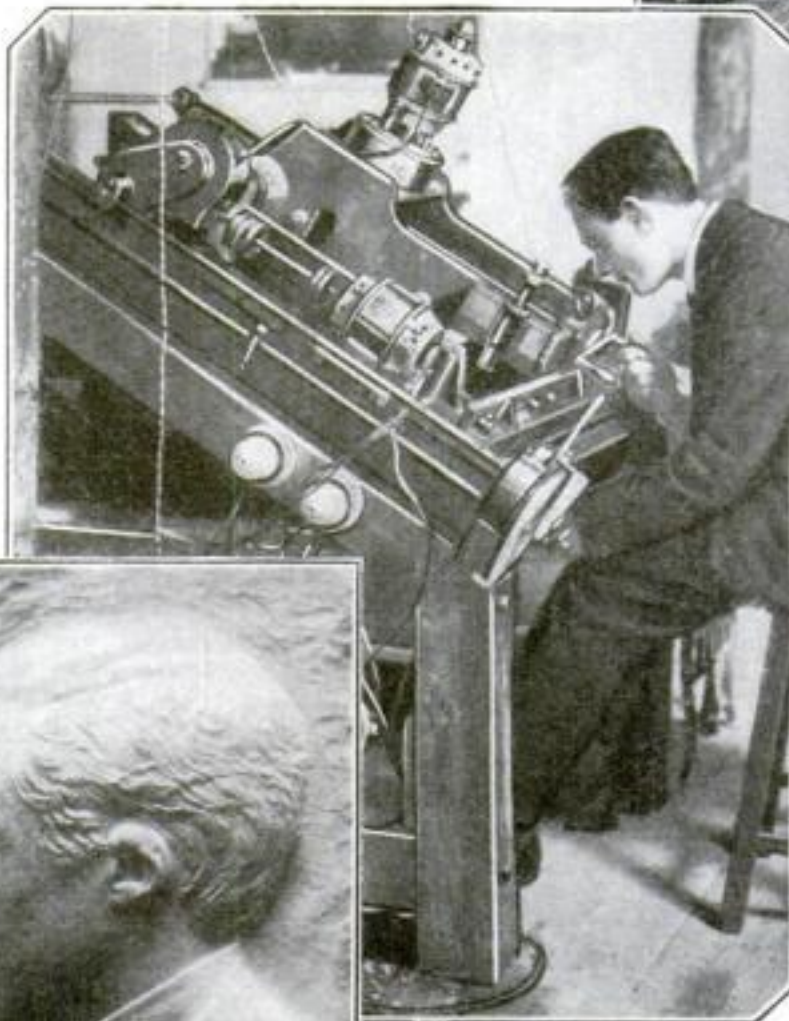

The remarkable bas-relief, at left, carved from a photograph by the improved sculpturing machine shown above, gives evidence of the beauty and precision of the new process



croscope over the end of one of the lines on the negative plate and maintains it on that line to the end of the cut.

Since the microscope and drill move in unison, every transverse deviation of the line from the straight results in a deeper or shallower cut of the drill. The operation is repeated on every line.

Making Bronze Bas-Reliefs

At the end of each cut, the drill is raised, the motor reversed, bringing the frame back to position.


For a bronze bas-relief, a plaster cast of the machine carving is made, upon which the metal is electrolytically deposited.

Small Thresher Saves Time for Farmer

A NEW small thresher that sells at a price within easy reach of the small grain farmers, should prove a great time saver, for with it the farmer can follow up the reaper, thresh his grain immediately, load his wagon with the grain, and scatter the straw

about the field to be plowed under as fertilizer.

A tractor draws the thresher about the field and the grain wagon is hitched alongside. Should it be desired to save the straw, the machine can be operated as a stationary engine.

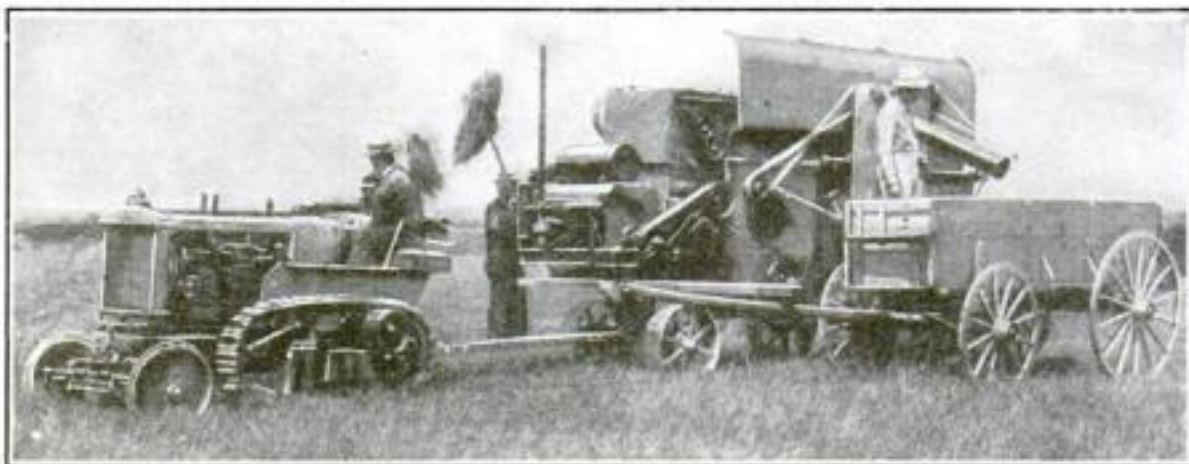

Radioactivity of Bottled Water Is Negligible

NONE of the foreign or domestic commercial bottled water sold to consumers on the claim of radioactive content really contains sufficient radioactivity to warrant its purchase, according to the report of investigations completed by the water and beverage laboratory of the United States Department of Agriculture, Washington, D. C.

In the examination of 46 samples from 15 states and eight foreign countries, the bureau found the highest quantity of radioactivity of a temporary nature in a bottled water from Massachusetts.

The largest amount of permanent radioactivity was in a sample from a deep well in Ohio. It was found, however, that it would be necessary to consume 2810 gallons of the Massachusetts water, or 1957 gallons of the Ohio water daily to obtain an efficient dose of radioactive salts.

During the tests radioactivity of samples was determined by means of electroscopes.

Secrets of Successful Auto Driving

How to Shift Gears Noiselessly—Other Useful Tips from an Expert

By Harold F. Blanchard

HOW many automobile drivers are satisfied with the way they shift gears from high to second or from second to low? Do you know how to make the most effective use of the appliances on the dashboard and of the levers at your side? And do you know how to safeguard yourself and your car against the chance of accident—a disturbing chance that continually hovers over the average motorist (whether he is aware of it or not)?

There are a hundred and one little tricks of successful driving that a veteran motorist learns, sometimes by bitter experience; and it is my purpose this month to pass some of these tips along in the hope that they may steer you away from common pitfalls and so increase your enjoyment and safety in driving.

Can You Shift Down?

First, consider the gearshift. Most motorists can slide from low to second and from second to high without a clash and without interrupting the motion of the car; but when it comes to shifting down—that's quite another matter. In fact, it's one of the most difficult problems of successful driving, particularly in hill climbing, and one that comparatively few drivers have mastered. The steeper the hill, the more difficult the problem becomes.

Right here I want to let you into a secret of gear shifting that has worked so successfully for me and for others who have tried it that it is worth passing on. I learned this secret from a motorist whom I met back in the hills of Vermont, and it's so simple, the wonder is that everybody hasn't tumbled to it.


Until I struck some of those grueling Vermont hills, I hadn't given much thought to uphill shifting. Like the majority of motorists, whenever I had to make a shift down, I shut my eyes, gritted my teeth, and yanked the lever. Sometimes I made a lot of noise, which I knew meant that I was chipping little pieces off the gear teeth; and often I lost considerable momentum. But on those terrific back road hills it was a question of quick and sure shifting, or the risk of breaking your neck. In short order I learned how to shift quickly, but I was still noisy about it, until I was taught the simple trick, which is this:

Speed the Engine—then Shift

Suppose you're climbing a hill that is a little too steep for high gear. When you are about halfway up, you realize you must shift to second. The throttle is wide open. You know, in general, that to make a silent shift from high to second, from second to low, or from high to low, you must increase the speed of the engine approximately to the rate demanded by the lower gear. But how? Here's the answer:

Hold the throttle wide open and depress the clutch just enough to allow the engine to speed up the desired amount—THEN SHIFT.

You can perform the entire operation in almost the time it takes to snap your fingers. You can't go wrong, and if you judge your engine speed with even fair accuracy, your shift will be absolutely silent. The clutch is out for such a brief instant that the loss of momentum is negligible. I have shifted from second to low by this

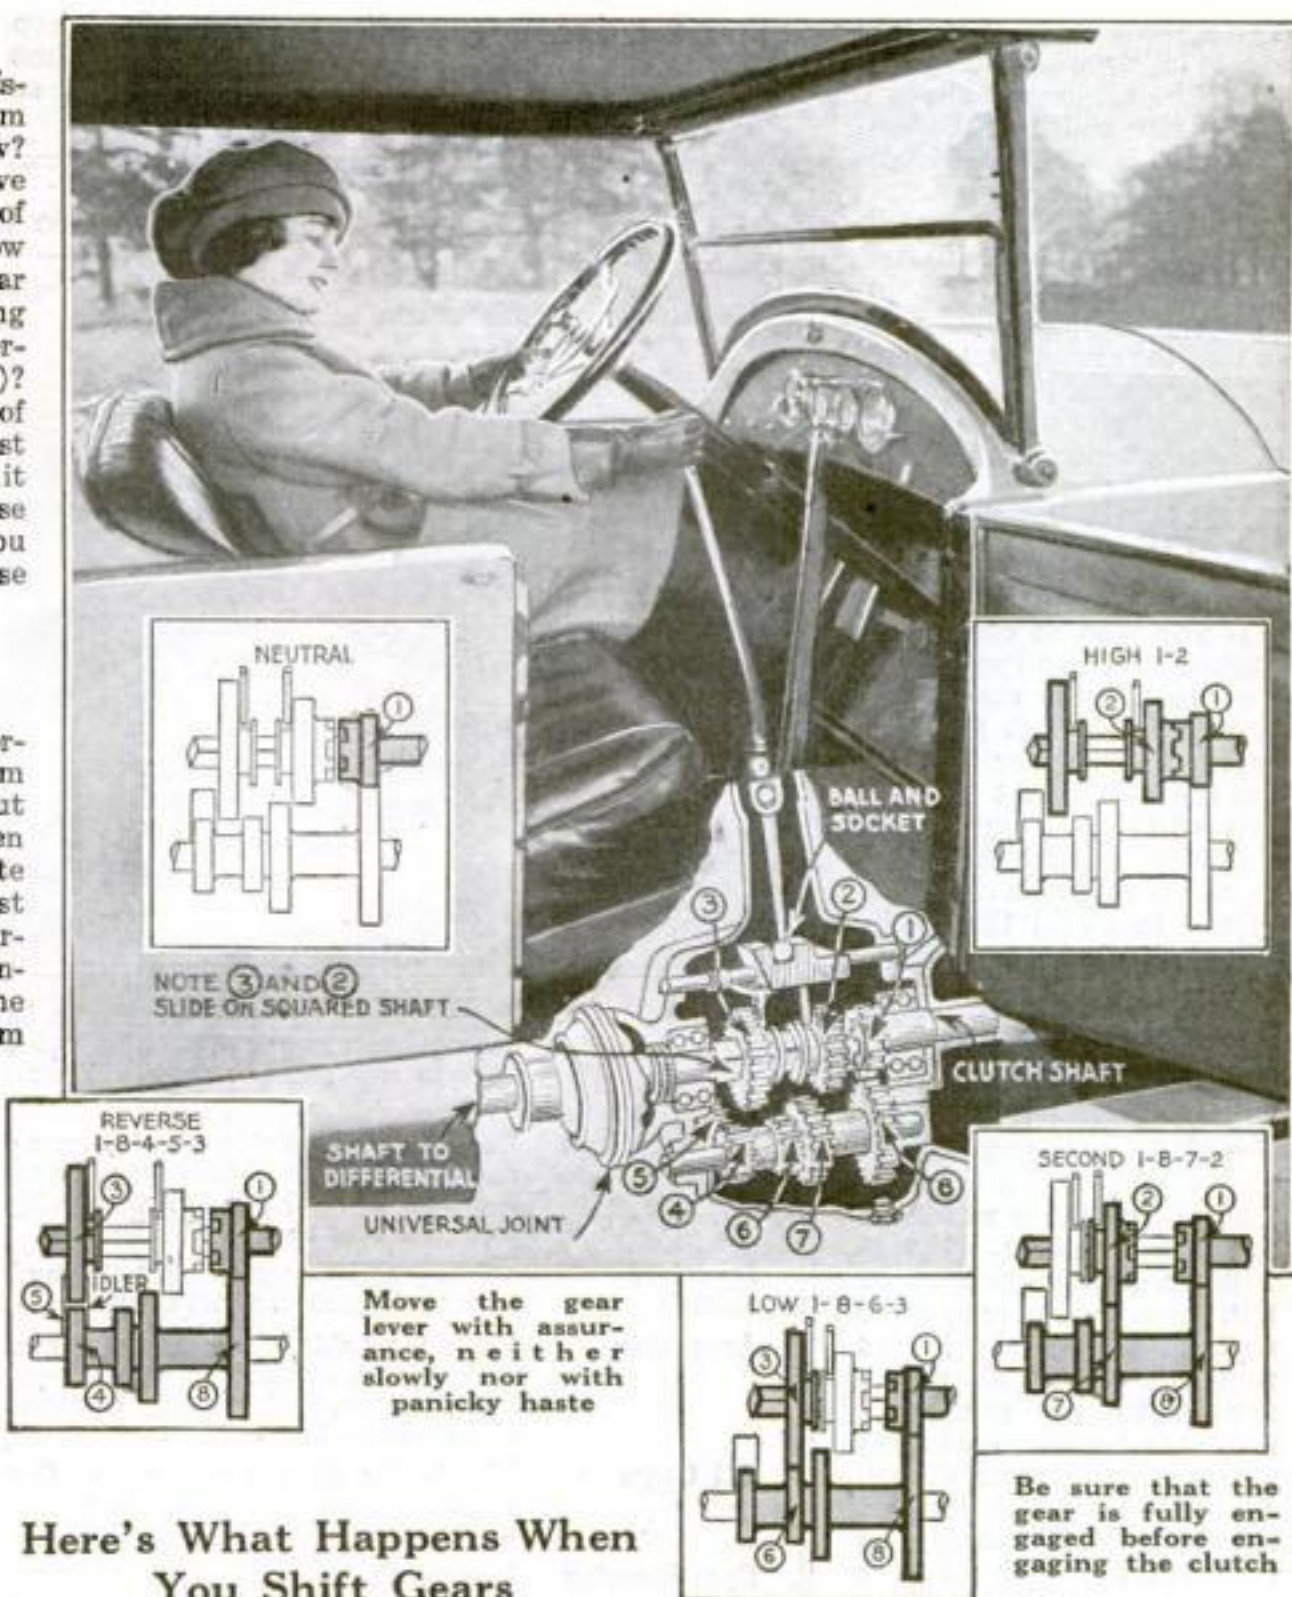

Here's What Happens When You Shift Gears

THE picture and diagrams above illustrate what goes on inside the transmission when you move the gear lever for the various gearshifts. The main numbered diagram shows the entire transmission gear mechanism as assembled in the ordinary car, while the small diagrams, numbered correspondingly, show the gear positions for various shifts.

Gear 1 is connected with the rear end of the clutch shaft and always rotates with it. Gears 2 and 3 are mounted on the main shaft, which is connected through a universal with the drive shaft. Gears 4, 6, 7, and 8 are mounted immovably on the countershaft and always rotate with gear 1, while gear 5 is mounted on its own little shaft and is always in mesh with 4. Gears 2 and 3 are the "sliding gears" that are moved by the gear lever. They slide on the

drive shaft, which is square or splined. Splines are simply keys integral with the shaft.

For high gear, 2 is moved forward and engages gear number 1. Thus the clutch shaft and the drive shaft rotate as one, and "direct drive" is obtained.

For second gear, 2 is moved back into mesh with 7 and the power passes through gears 1, 8, 7, and 2.

For low gear, 3 is moved forward to mesh with 6, and the power passes through gears 1, 8, 6, and 3.

For reverse, 3 is moved into mesh with 5, and the power passes through 1, 8, 4, 5, and 3.

method on a 30 per cent grade without noise and with no noticeable loss of speed.

If a down shift must be made on a slight up grade, down grade, or level, you need not open the throttle wide. A good rule is to hold the throttle pedal just where you have had it. In shifting from high to low, remember that the engine must be sped up much more than if you were shifting from second to low. Also remember that while 20 miles an hour is a moderate speed on high, it is a terrific speed on low. It is

entirely safe to shift from high to low at from 15 to 20 miles an hour, provided you speed the engine up enough. In any case, too much engine speed is better than too little.

I've observed that many drivers, when shifting upward, are puzzled as to what to do when they wait too long, missing the gear. After trying to effect an engagement by clashing, they stop the car and start over again. There is an easier method. If you're shifting from second to high, for

example, and miss high, immediately slip the lever to neutral, engage the clutch, and speed the engine up to a point somewhat beyond that demanded by high gear; then shift as if nothing had happened. Logical, isn't it?

Similarly, if you've been coasting down a long hill with shift lever in neutral and engine idling, when you get to the bottom, speed the engine up above the high gear rate before shifting. Unless you do this, you may have trouble engaging the gears.

If you coast down a hill with lever in neutral and engine shut off, there is no way of getting back into gear so that the momentum of the car may be used to start the engine. The engine must be brought into motion with the electric starter.

When Engine Is Shut Off

If you wish to coast with engine shut off and yet do not wish to use the starter, be sure to leave high gear engaged, coasting by holding out the clutch. At the bottom of the hill engage the clutch gently, with the switch on and the throttle closed, so as not to strain the mechanism.

In using the engine as a brake, it makes little difference whether the switch is on or off; but if you run with it off, be sure to keep the throttle closed, not only to save fuel, but also to avoid muffler explosions when the switch is turned on.

When driving down a long hill, use second gear in order to keep your brake linings from burning. This advice applies to all cars with service and emergency brakes acting on the same drums. If the brakes are on different drums, it will probably be sufficient to use the brakes alternately for about an eighth of a mile at a time. On the Ford, use the service brake and reverse pedal alternately.

Mud a Cause for Worry

Don't attempt to drive on snowy or icy roads without chains applied to the rear wheels. Look out for slippery, muddy hills in traversing unknown side roads in mountainous country.

When driving on unknown roads, mud is really the only thing to worry about. Sand or stones or severe bumps all may be negotiated successfully, even though some time may be lost; but it takes more than slow driving to combat deep mud. Chains will be required on the front wheels for steering, as well as on the rear wheels for traction. If no chains are available, remember that any farmer can supply you with hemp rope from three quarters to one inch in diameter, which will serve the purpose.

In the deepest mud even chains and rope are useless, but a special device, known as

a "mud hook," is made just for the purpose. It is of metal, with a broad base that is chained to the tread of the tire. Mounted crosswise on the base is a metal cleat two inches high. With two of these hooks on each rear wheel, your car can walk out of almost anything.

To get through a short stretch of deep mud, or even a single deep puddle, just "keep going," using second or low, as

race driver, and some of the most dangerous rides have been with motorists who thought they were being "careful." I believe there is no such thing as an unavoidable accident. True, there are plenty of accidents in which two cars are involved in which one driver is absolutely innocent; but never have I found a case where both drivers really did everything in their power to avoid an accident. Doesn't the appalling increase in automobile accidents emphasize the need of education for the driver?

Let's consider a few instances where accidents might have been avoided easily:

"A" swings around a corner at a fair rate of speed while a pedestrian walks into his path. Instead of slowing down, "A" presses the horn button to shoo the man out of the way; but the horn fails him.

Local Rights of Way

"B" approaches a road intersection at a fair rate of speed. He has the lawful right of way. But at the same moment another car, piloted by a stranger who doesn't know the local law, approaches on a side road. "B" stands on his rights and there is a collision.

"C" drives 15 miles an hour—the lawful speed—down a street crowded with playing children. One of them gets in his way. He tries to stop, but it is too late. Ten miles an hour would have prevented the accident.

"D" is running 40 miles an hour when his right front tire blows out. The steering wheel is jerked from his grasp and the car turns over. A tight hold on the wheel would have prevented the accident.

Horn Prevents Disaster


"E" is driving at a moderate pace along a country road. He dims his lights for an approaching car and then runs over a man walking at the side of the road. Blowing his horn at the moment would have prevented the calamity.

It must be admitted that better brakes might prevent a large percentage of accidents. The braking equipment on most cars is sadly deficient. But it is difficult to imagine an accident that might not have been avoided by exercise of caution.

The trouble is that most motorists drive with little or no "factor of safety." If this term is new to you, I might explain by saying that an elevator cable is usually made 10 times as strong as the calculated maximum stress; thus the factor of safety is 10. In machines where life is not endangered by possible breakage, it is usual to allow a factor of safety of five. The factor of safety is a necessary precaution to allow

(Continued on page 45)

At the Wheel—What to Do and How to Do It

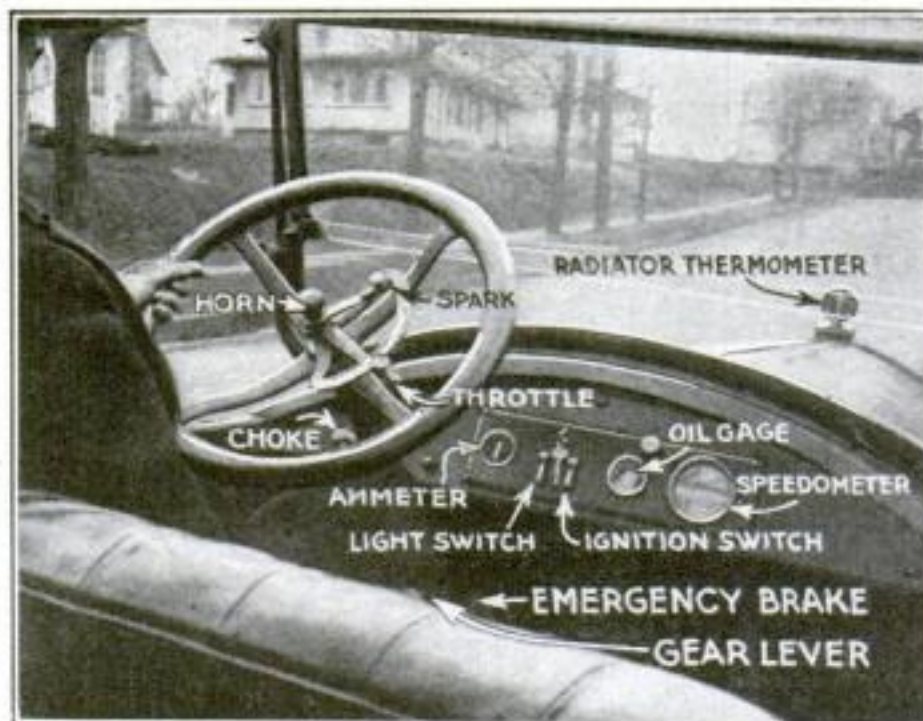

Choke	Don't forget to push the choke in after the engine has started; otherwise the engine will suck in raw gasoline that will prevent proper lubrication.
Light Switch	Be sure to turn lights off when you put the car away. Never leave headlights on when the car is standing, but have at least one light burning front and rear to prevent collision.
Ignition Switch	When you attempt to start the engine, be sure to turn the switch on all the way.
Ammeter	Form the habit of watching the ammeter measuring the current from the battery. When it fails to work, find out why as soon as possible and avoid battery trouble.
Oil Gage	Watch the oil pressure gage. Operating the engine when the gage fails to register will usually result in burned out bearings.
Speedometer	Be sure that your speedometer is accurate. At least twice a year ask some motorcycle officer to pace you for a hundred feet or so.
Gear Lever	Before starting the engine, always be sure the gear lever is in neutral.
Emergency Brake	After the car is under way, try the emergency brake to see that it is off and so avoid burning out brake lining.
Spark	Drive with spark fully advanced, retarding it only to prevent knocking when the throttle is opened wide with engine running slowly. Retard spark half way when cranking.
Throttle	Open the throttle from one eighth to one quarter for starting.
Horn	Never "drive with your horn." Don't depend on it. It may fail you when you need it most.
Radiator Thermometer	When the thermometer indicates an overheated engine, get out and see what's wrong.


required. If the car stops, don't spin the wheels, or you are likely to get mired to the hubs. Back out of the mud gently but firmly. Then take stock of the situation. Detour if you can; put on chains, ropes, or mud hooks if necessary; inspect the road for an easier path; and, finally, if you must follow your original tracks, do so with all the speed you dare. If you stop again, back up and buck it again, and so on.

The safest ride I ever enjoyed was with a

Novel Auto Accessories for Safety and Comfort



The neck of this 2½-gallon folding bucket for filling the radiator has an automatic valve that opens when resting on radiator pipe

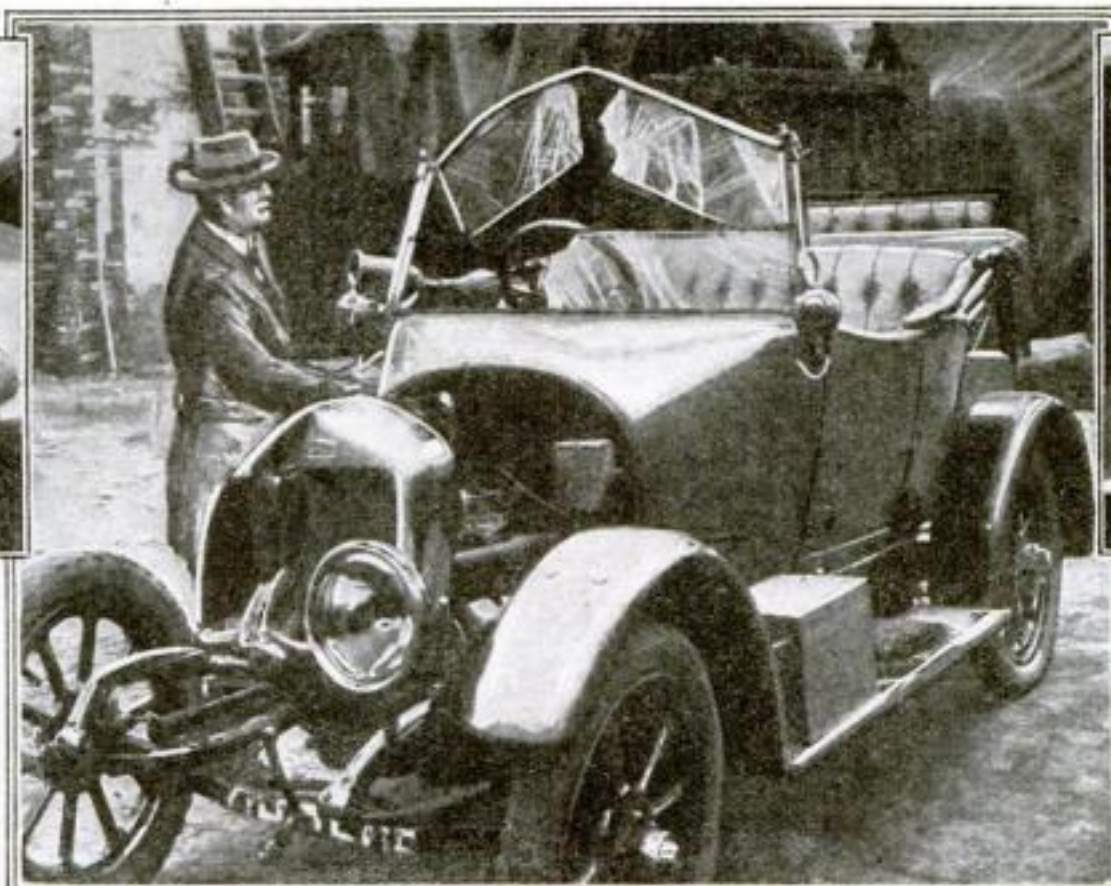


Because this windshield, against which a motorcycle rider was hurled, was of a new type of non-splintering glass, the occupants were uninjured



A newly devised spring hinged gasoline tank cover cannot be lost and provides added safety against explosion by releasing vapors generated by excessive heat



A new leather spring cover contains an oil hole equipped with dustproof spring cap, and provides efficient lubrication

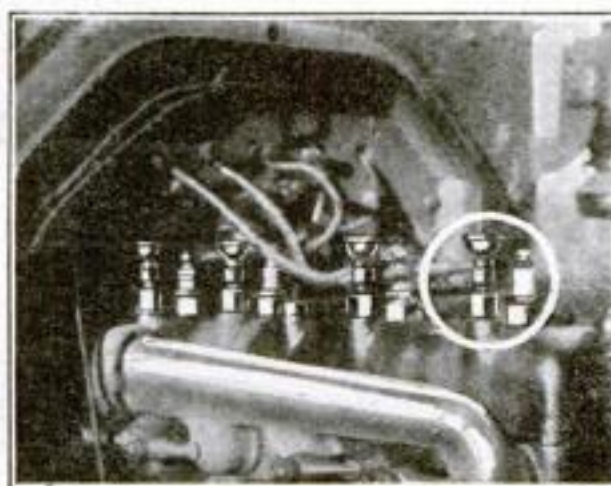

New priming cups, mounted on four special head bolts and installed in an hour, facilitate starting of Fords



This instrument simplifies headlight focusing by projecting the rays on a ground glass screen

(Continued from page 44)


for flaws, lack of uniformity in the strength of material, unexpected stresses, wear, and rust.

But most motorists drive as their whim dictates. They fail to make allowances for lack of experience, lack of alertness, unfamiliarity with the roads, recklessness of other drivers, faulty brakes, or unexpected developments. As long as conditions remain ideally favorable, they skim through, but sooner or later they run into trouble.

It is advisable to be twice as careful as you think you ought to be, simply because it is impossible for any human being to be fully alert every instant that he is behind the wheel. No matter how good a mind he has, it will wander. Hence the constant need for alertness as a factor of safety in driving.

To maintain a proper factor of safety at all times, we must view our driving pessimistically. When on the road we see a smashed car and its victims, we are kidding ourselves if we say, "That will never

Know Your Car

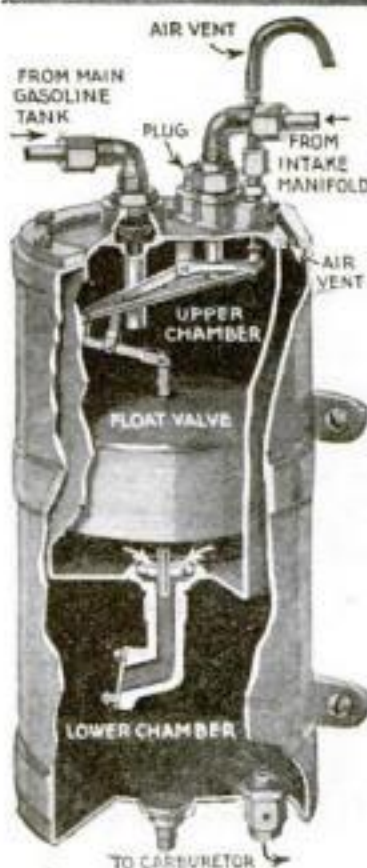

The Vacuum Tank

THE function of the vacuum tank is to draw fuel from the gasoline tank and deliver it to the carburetor, utilizing suction from the intake manifold. The tank incloses two chambers, a float, and valves. In the upper chamber are intake pipes connecting with gasoline tank and intake manifold, while an outlet pipe in the lower chamber runs to the carburetor.

When the float is at the bottom of the upper chamber, as in diagram, the valves controlling the gasoline pipe and suction pipe are open, and the upper chamber fills with fuel. Thereupon the float rises, closing these two valves and opening an air vent. The fuel then flows through a one-way flapper valve to the lower chamber, thence to the carburetor.


As the upper chamber is emptied, the float drops and the cycle is repeated.

happen to me." We should never think of taking a chance if we thought that we might suffer for it the very next instant. The attitude that we can take a chance once in a while and get by with it is wrong. Just as wrong as that of the motorist who believes in his luck. We can't monkey with the law of averages and get away with it. The more chances we take, the surer we are of having an accident. The only way to be safe is to drive always with an extra dose of caution.

I've found that it takes imagination, experience, and unending alertness to drive safely mile after mile. In order to drive safely, we must learn to recognize crises of all sorts far enough in advance to take whatever steps are necessary to avoid them.

New drivers will do well to be especially cautious until the trio—imagination, experience, and alertness—are fully developed. Finally, here's a mighty good rule to follow:

Never outdrive your headlights or your brakes.

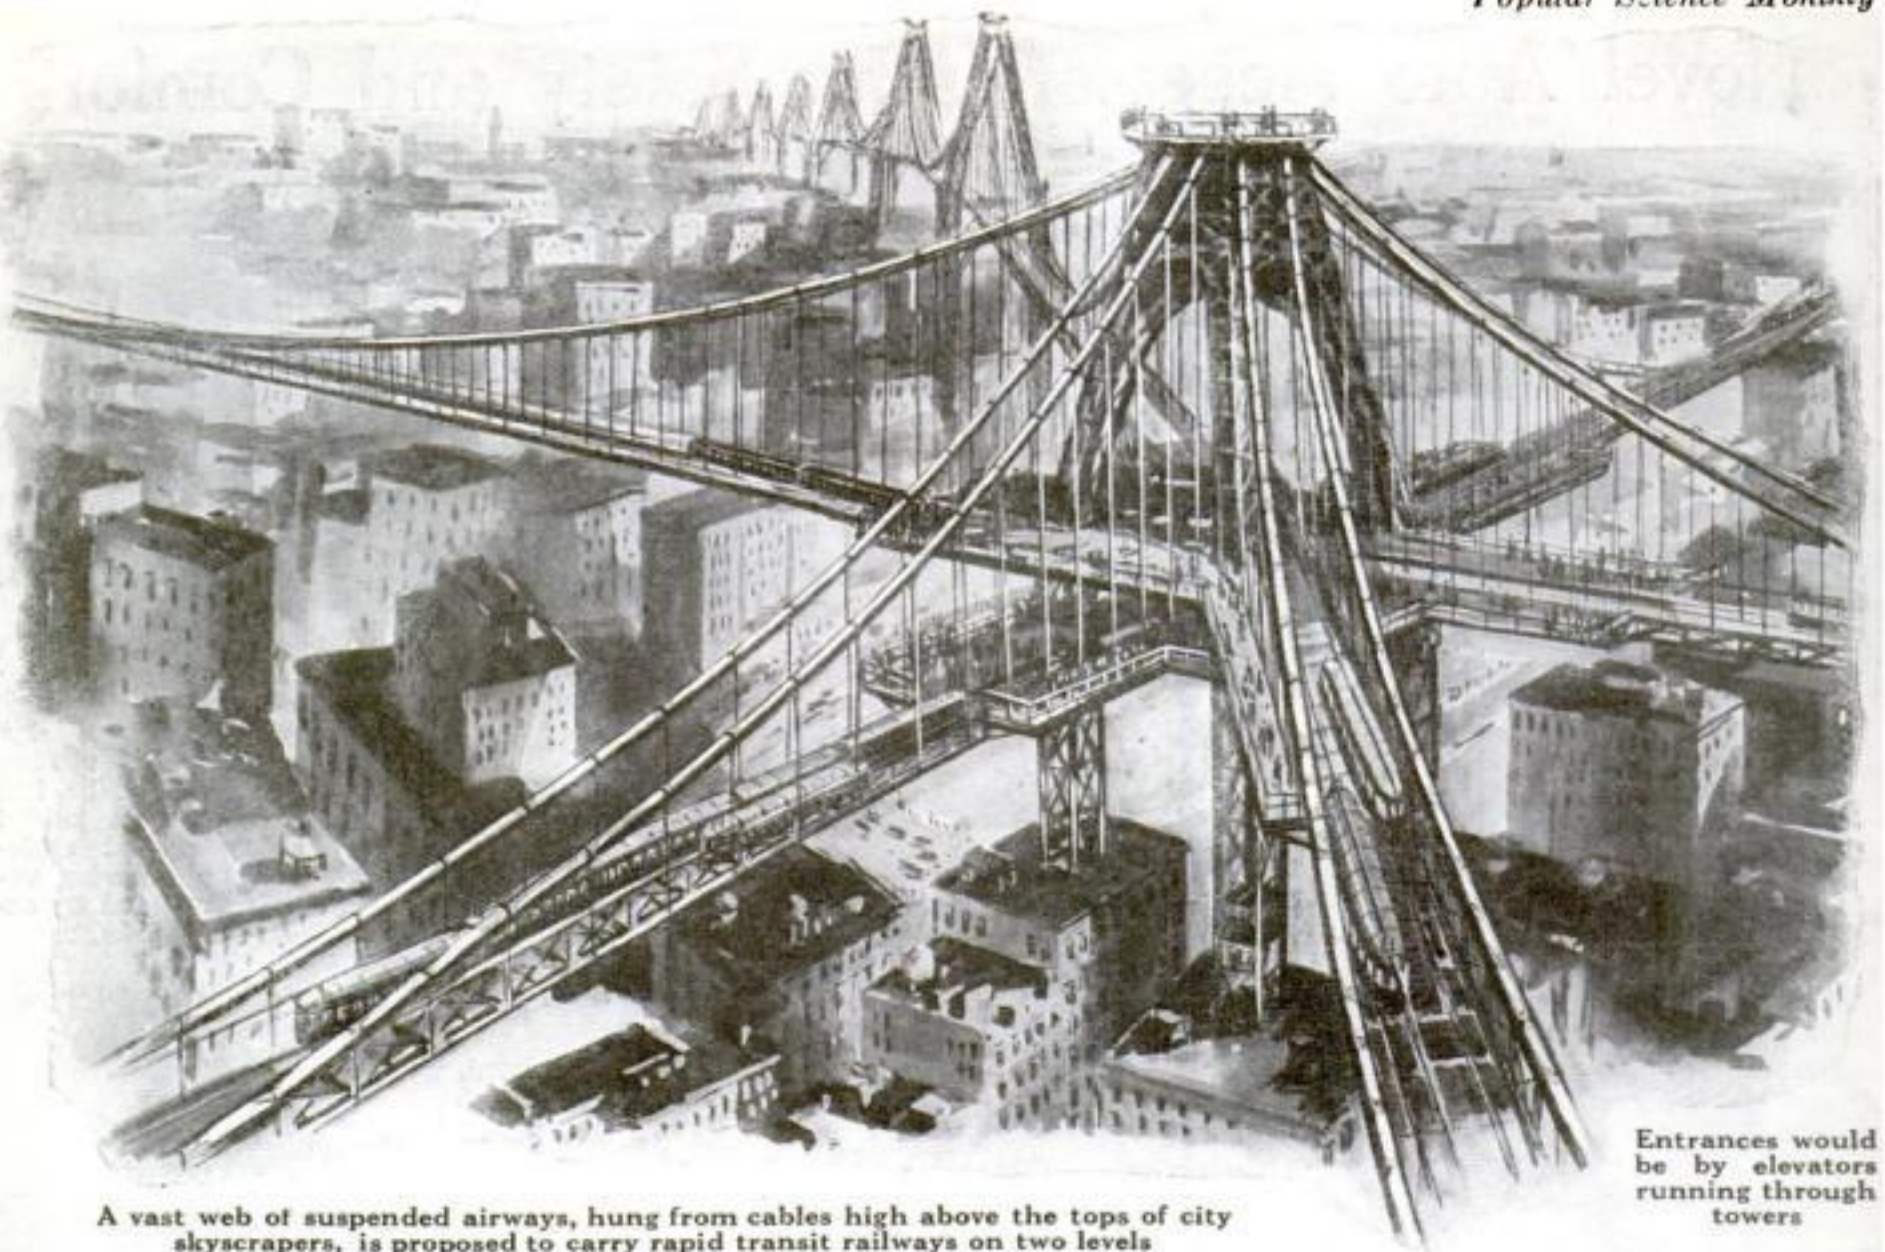

A vast web of suspended airways, hung from cables high above the tops of city skyscrapers, is proposed to carry rapid transit railways on two levels

Entrances would be by elevators running through towers

Proposes Suspended Railways to Bridge Cities!

CONFRONTED with traffic problems that seem beyond solution under present conditions, faced with ever increasing streams of automobiles, and impressed with the need for adequate rapid transit, authorities of greater American cities, especially New York, are desperately trying to find some way to meet the situation.

How will these critical problems of transportation be met eventually—on the surface of our streets, underground, or above us?

An Expert's Prophecy


Gustav Lindenthal, designer of the world's greatest railroad arch bridge and of the colossal suspension bridge that will span the Hudson River, declares, in a signed article on the opposite page, that the century in which we live will be the final chapter in the greatest era of iron bridge construction in history.


Is it possible that the last word in suspension-cable steel bridges will be a vast network of hanging airways, carrying trains of an aerial rapid transit system high over skyscraper roofs out to the commuters' suburbs?

Just such a system of aerial transit actually has been projected by R. C. Lafferty, New York engineer, and is now being considered by the New York Transit Commission to supplant, to some extent, the subways and elevated struc-

tures now in use. Lafferty includes in his plan a motor speedway at a much lower level, under the airway—a plan that is directly in line with that proposed by

Richard Enright, New York police commissioner, in the hope of relieving the terrific congestion of automobile traffic in America's greatest city.

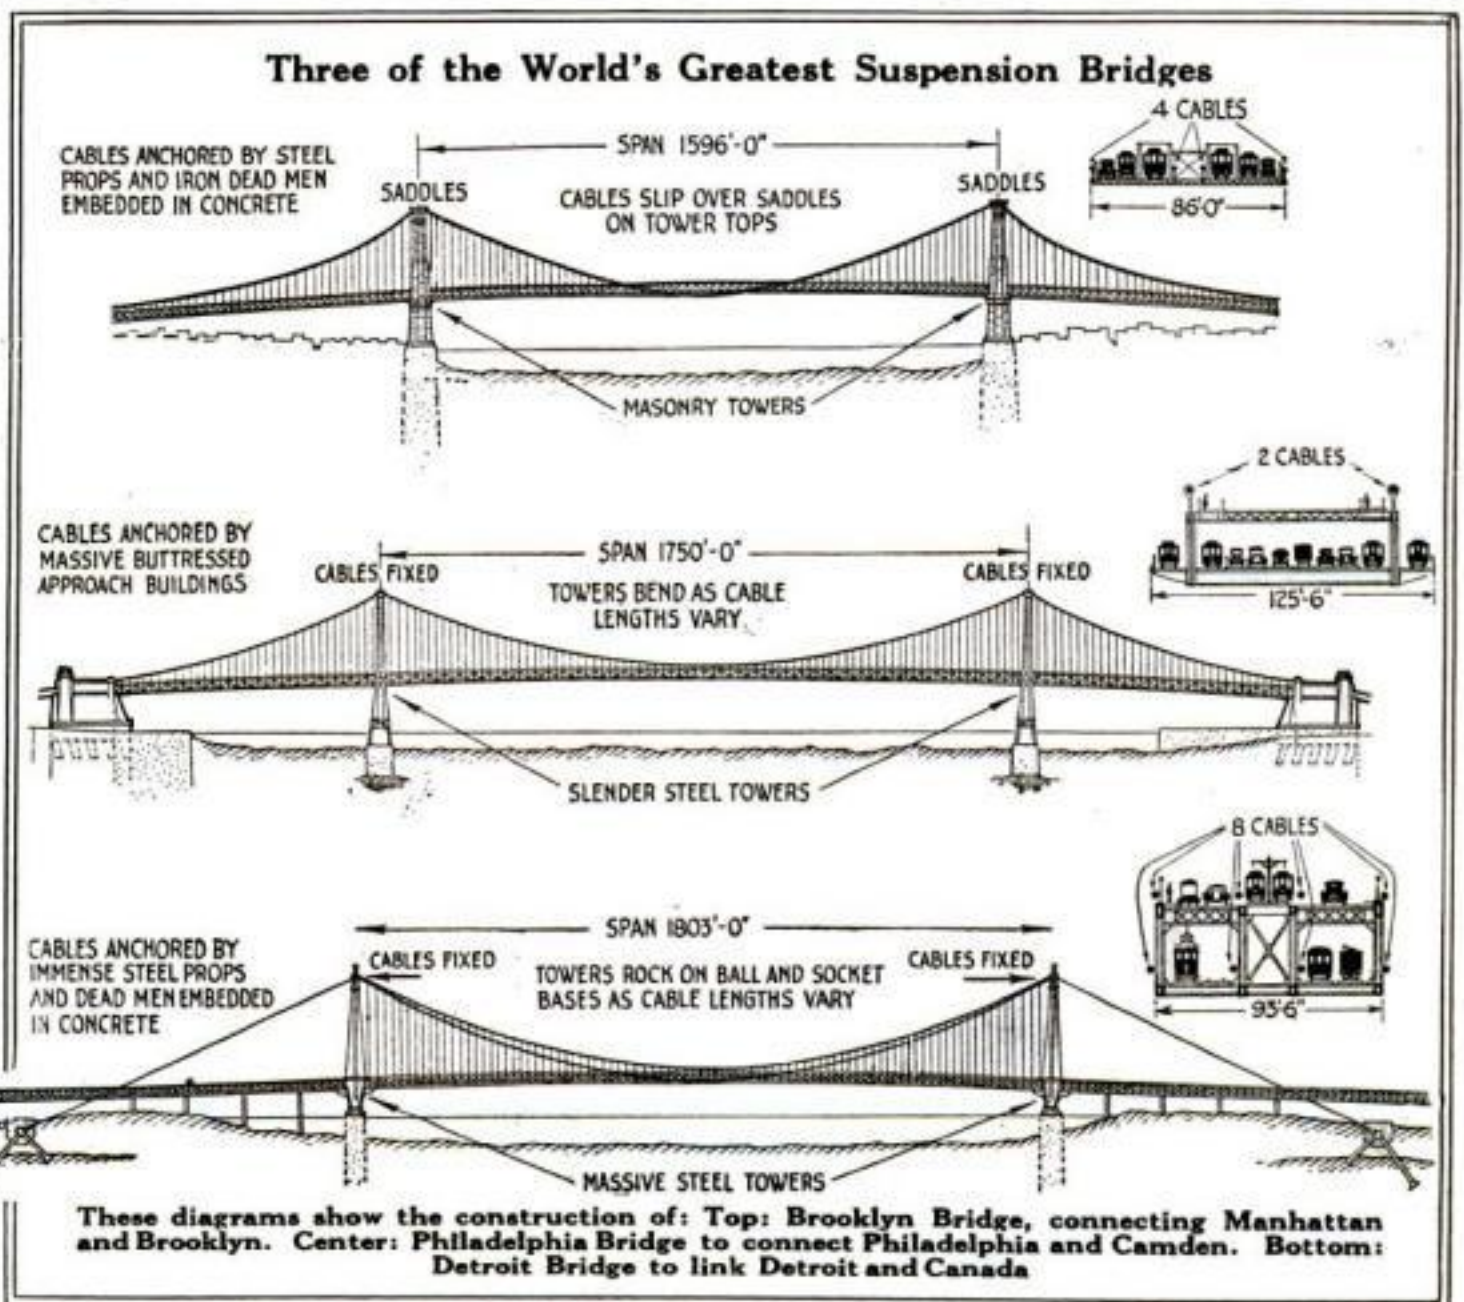

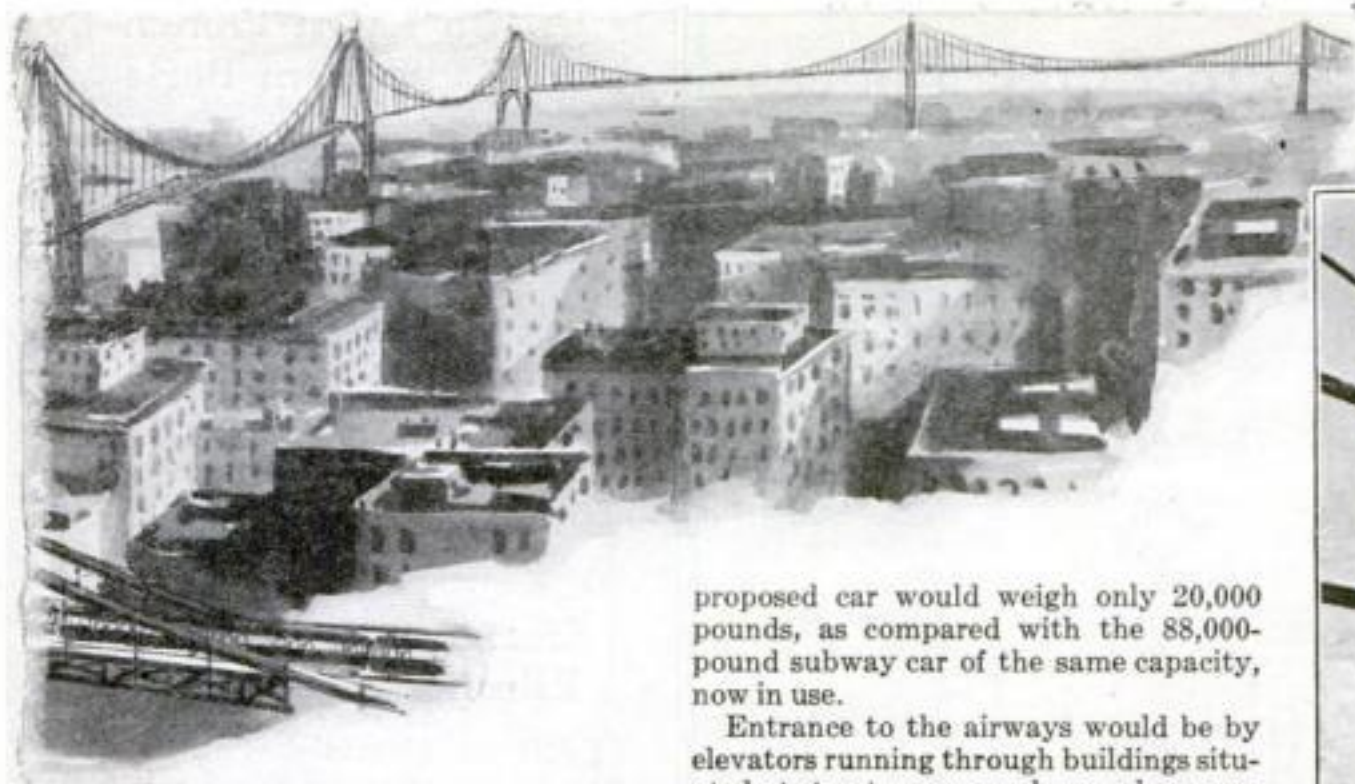

"The trouble with most of our large cities is that they have failed to look ahead," says Commissioner Enright. "In 1920 we had 50 per cent more automobiles than in 1916. The estimated increase in automobile traffic this year is between 30 and 33 per cent. In 1919, for instance, 39,210 automobiles passed through Columbus Circle, New York City, within a 12-hour period. Today that number has grown to about 70,000.

"We are doubling the number of automobiles, by conservative estimate, every three years. And, with Henry Ford cutting the price of his automobiles and men like W. C. Durant predicting the day of still cheaper automobiles, it is likely the increase will go on at an even greater rate.

"Traffic congestion affects every one in America, not only in discomforts and difficulties he encounters in his own city, but in increased cost of living. Congestion at the waterfront in New York adds to the price of every article that passes through the channel of that waterfront."

Commissioner Enright's Proposal

Enright has proposed long viaducts, stretching half the length of Manhattan Island on both sides, with ramps leading to side streets at long intervals, to take care of auto traffic and relieve congestion. But even he admits that this does not take care of increasing pedestrian traffic nor provide for adequate rapid transit.

Lafferty's plan makes possible the installation not only of Enright's proposed viaducts, but also of airways for rapid transit. He would eliminate the present unsightly elevated structures of New York, Chicago, Boston, and Philadelphia.


As supports for his proposed airway, Lafferty proposes to use strong steel braced pylons, or abutments, set into bed rock at distant intervals. Strong suspension cables swung between these pylons would support the roadbed. He provides for four tracks, two on an upper deck, on which would run long cylindrical steel cars. He would eliminate excessive wear and tear on cars by having them run on monorails, one rail above the car and the other below it. The car would be supported on the lower monorail by a large bearing wheel at each end, and would be driven by small horizontal power wheels forced by compressed air to grip the track from each side. The car would be held upright by means of idler wheels running on the upper tracks.

Since it would be unnecessary to depend on weight for traction, Lafferty's

proposed car would weigh only 20,000 pounds, as compared with the 88,000-pound subway car of the same capacity, now in use.

Entrance to the airways would be by elevators running through buildings situated at street corners, where pylons supporting the suspension bridges would be placed. This feature, of course, would eliminate the present ugly stairways to elevated roads as well as the kiosks for subways.

Below is shown the proposed method by which long, cylindrical cars would run on monorails of an aerial railway. Traveling on single wheels, the car would be propelled by smaller power wheels gripping the lower rail

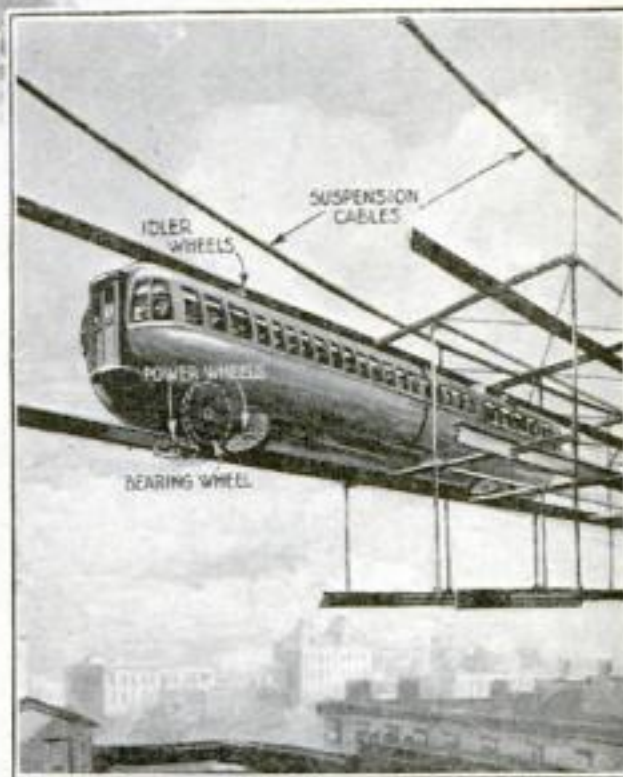

Close of Greatest Iron Bridge Era Is Near

By Gustav Lindenthal, Designer of the Hudson River Bridge

WITH this century will pass the age of iron suspension bridges. We are about to reach the furthest advance in the art of bridge building we shall ever know. Indeed, the Hudson River Bridge project, most stupendous structure ever proposed, may mark the ultimate in bridges.

Although the twentieth century will go down in history as the great era of steel bridge building, there is little doubt that the year 2000 will see the end of these projects. By that time iron will have become too costly, because of the diminishing supply of iron ore.


We can look back to the time when a suit of armor was almost worth its weight in gold or silver. We cannot see far enough ahead to predict that iron will again become such a costly product, but we do know that it will cost too much to

be used in great quantities for bridge building.

Only a century ago the age of iron bridges began. From the early simple bridges of iron were developed the greatest structures of the present—the Brooklyn and Williamsburg suspension bridges, the Firth of Forth cantilever bridge, and the Hellgate bridge, the greatest railroad arch structure the world has ever known. Railroads today are building the finest bridges.

Within the past 10 years the price of steel has almost doubled. The available supply of iron in the world is slowly but surely decreasing.

There may be improvements in the uses of newer materials for some parts of bridges, but in the main it is safe to assert that we are about to say the last word in iron bridge building.

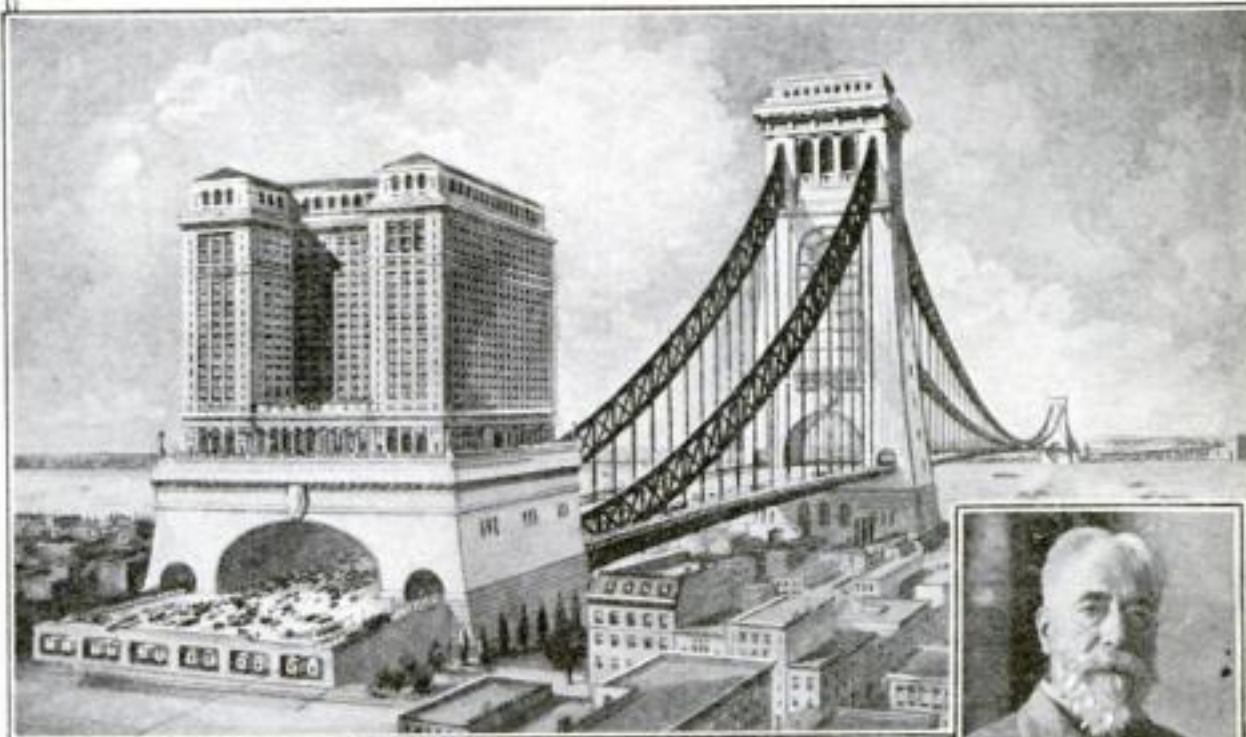

The projected suspension bridge across the Hudson River with central span nearly three quarters of a mile long. Its designer, Gustav Lindenthal (at right), says it may represent the highest possible limit the world will ever see in iron suspension bridge construction

© Paul Thompson

Stepladder Folds into Small Space

A NEW collapsible, rigid stepladder is a valuable addition to household accessories.

The ladder has a skeleton frame of wood fastened together with nickel-plated steel catches. Each step is of two pieces hinged in the center and, when in use, is supported at the center by steel braces. The top step is protected by guards. The ladder folds into $2\frac{3}{4}$ by $7\frac{1}{2}$ by 52 inches.



This rigid stepladder, when folded, can be hung on the back of a door, as shown below



British Learn French by Radio from Paris

MANY persons in London and vicinity are learning to speak and understand the French language as the result of the broadcasting of music and speeches from the Eiffel Tower in Paris. Thousands of British citizens listen in.

Most of the London department stores are selling a cheap standard receiving set from which good results are obtained. Hearing the spoken French over the radio and supplementing this with textbook study, makes it much easier for students to understand and speak the language.

Electrical Sealing Device Eliminates Fire Hazard


THE recent invention of an electric sealing machine marks the first important improvement in methods of applying sealing wax since King Solomon's time. The new appliance eliminates the fire hazard that accompanies the present crude method of heating the wax over a flame, as well as effecting an appreciable saving of time, wax, and postage.

The wax is placed in a container, where it is melted by means of an electric heater. Placing the machine over the spot where the seal is to be, and pressing a small lever releases a small amount of sealing wax. Pressure on the seal handle brings the seal down on the melted wax, completing the operation.

The New York concern that manufactures it claims that the new sealing machine effects a saving of 50 per cent in wax, 50 per cent in time and 20 per cent in postage. The additional expense of the electricity consumed is comparatively small—one half a cent an hour for continuous operation.



Electrical sealer, showing wax heating pot

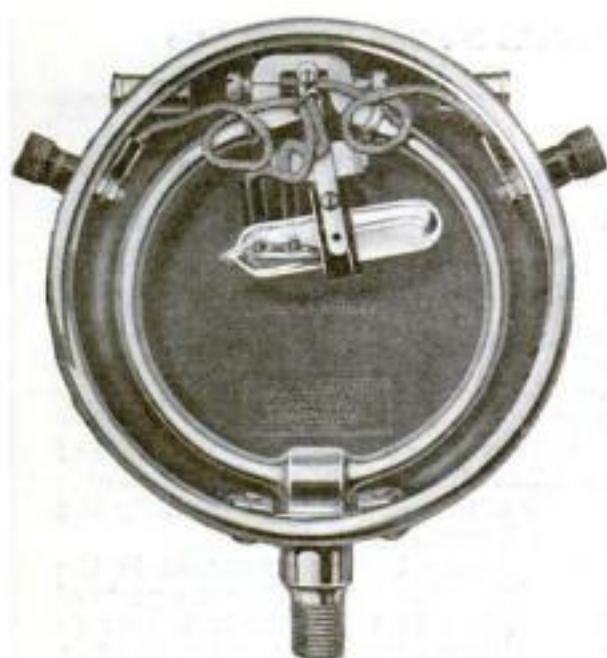


Mercury Circuit Breaker Controls Pressures

A GLOBULE of mercury inside a glass bulb filled with an inert gas is being used to control pressures by making and breaking electric circuits. The tube is usually attached to one arm of a Bourdon tube. When the pressure increases, the tube tends to straighten out and the action shifts the mercury from one side of the control tube to the other.

One or more electrical contacts located within the tube dip into the mercury when the liquid is in certain positions. As the mercury slides back and forth in agreement with the movement of the Bourdon tube, the electric circuits are made and broken.

The tubes have been made for pressure differences of .2 of an ounce, and will handle electric currents of 10 amperes at 110 volts.

Because of the inert gas that instantly kills any tendency of the mercury to arc, the little tubes are said to have a long life.



How mercury opens and closes circuit

Writing on "Everlasting" Pad Disappears

AN "EVERLASTING" tablet for memoranda, recently invented, consists of a rectangular sheet of metal, with edges bent over to form a frame, and coated on the upper side with a black composition of waxlike consistency. Over the black coating is a sheet of very tough tracing paper, held in place by a metal strap across the top.

Memoranda are written on the tracing paper with glass pointed stylus. As long as the thin paper remains pressed against the black coating the letters formed by the impressions of the stylus are visible; but when the paper is lifted away, the writing permanently disappears.



Handleless Camping Utensils Save Space

HANDLELESS camping utensils, which can be attached with a thumb-clamp to improvised handles, have been invented recently by a Canadian—

William J. Feldkamp, of Brantford, Ontario, to save packing space and weight—serious problems for all campers.

Handles may be made at the camping site from split or forked sticks and attached to the utensils—fork, spoon, toasting spit, or pancake turner—by means of a




clamp operated by a thumb-screw.

When the time comes for breaking camp, these handles may be thrown away.



Elevator Locks to Lift Barges over Dry Plateau

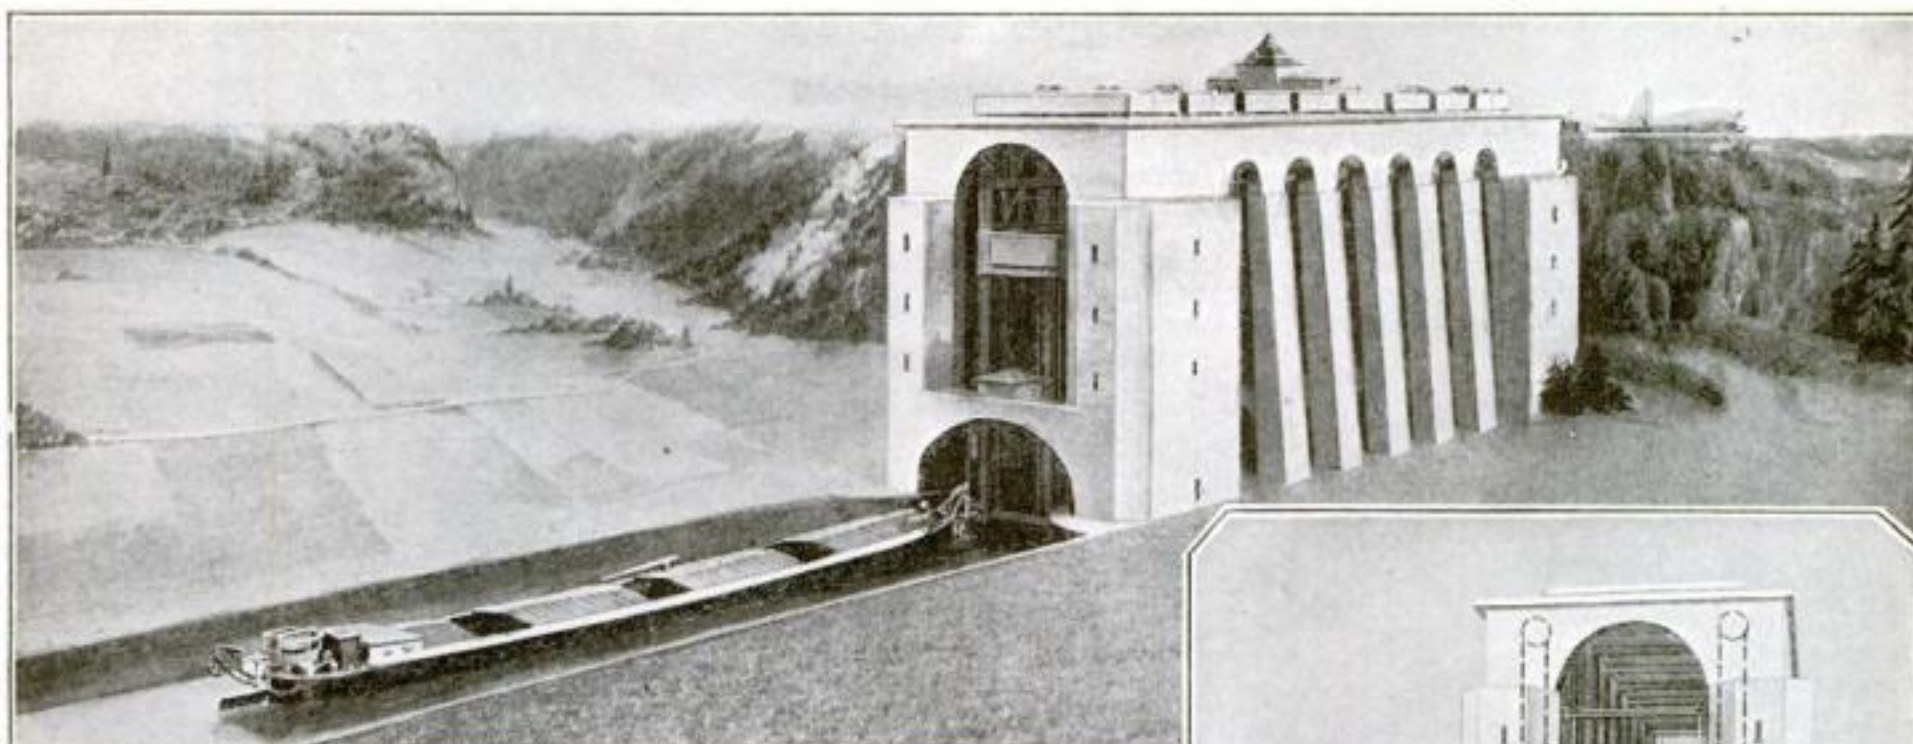


To carry boats through the proposed canal between the Rhine and Danube (see map), 26 massive counterweight lift locks like that shown above would be required

DESPITE unsettled industrial conditions, engineers in Central Europe are planning the construction of what will be one of the world's most important artificial waterways—a water route from the North Sea to the Black Sea, extending 2100 miles across the European continent, and linking the Rhine and Danube rivers in Germany. Tremendous engineering problems are involved, for such a canal would have to traverse the Alb plateau lying between the upper Danube and the Rhine, at a height of 1830 feet, in a region where water is scarce.

The scheme involves the canalizing of the Neckar River, a tributary of the Rhine, up to Plochingen, Würtemberg—a point 35 miles distant from Ulm on the Danube—and an extension of navigation up the Danube to Ulm. Between these two points the canal would have to be carried over high plateaus by systems of locks.

The absence of an adequate water supply for the operation of locks involves the most serious problem, which engineers propose to solve by using immense mechanical lifts.

Twenty-nine of these lifts will be required since the plateau rises nearly 1500 feet above the Rhine end of the waterway at Mannheim and 300 feet above the Danube end at Ulm. The proposed counterweighted lift lock is a massive structure of concrete and steel, capable of lifting 1200-ton boats

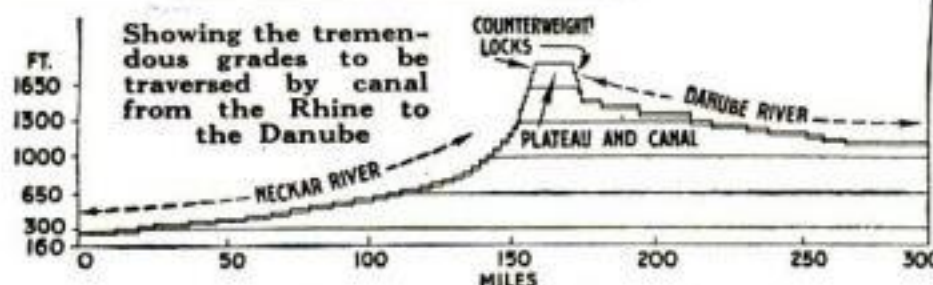

86 feet. The elevator consists of a trough filled with water in which the boat floats. This trough is suspended from the structure by wire cables that pass over drums at the top and are attached to counterweights. Electric motors, operating endless link chains, supply the power.

To elevate a ship the trough is brought to the lower level; then a safety mechanism opens the lower gate. The boat is drawn into the lock by means of a cable operated from within the lock and when in position



Entering the lock, the boat floats in a water-filled trough suspended on cables that pass over drums at the top of the lock. The elevator trough is lifted by counterweights and electric motors

the lower gate is closed, imprisoning the boat and sufficient amount of water to float it.

Power is then transmitted to the endless chain for the lifting. The counterweights are sufficient to balance the trough and its load so that just enough power is required to overcome friction in the operating parts.

When the trough has reached the upper level, the safety mechanism again allows the upper gate to be opened and the boat is free to continue its journey. Thus the water is conserved in the upper reaches and there is no danger of the canal running dry.

It is estimated that 50 ships could pass through the canal daily. This canal would be as important as the Suez and Panama canals, for it would provide a short and cheap route from the North Sea to the Mediterranean and the East.

Fortune for Inventor Who Saves Mountains of Grape Pulp

FORTUNE awaits the man who discovers a profitable method of converting into salable jellies, cream of tartar, oils, and extracts the enormous quantities of grape skins and pulp wasted each year by grape juice factories.

Reports of the Department of Agriculture show that the average quantity of grapes crushed yearly for beverage purposes in the five years ending in 1918 was 22,000 tons. Of this



More than 4000 tons of valuable grape pulp is wasted each year at grape juice factories in piles like this

amount 660 tons was discarded as stems and 4400 tons as wet pulp.

From the stems it would have been possible to obtain 13.2 tons of cream of tartar. The seeds in the pulp would have yielded 89.3 tons of oil and 526.7 tons of oilcake. Even the hulls would have added their share in the form of nearly 50 tons of tannin extract.

Experts estimate that 3300 tons of wet grape skins goes to waste annually.

Photo courtesy U. S. Department of Agriculture

Mysterious Birthplace of Eels at Last Discovered

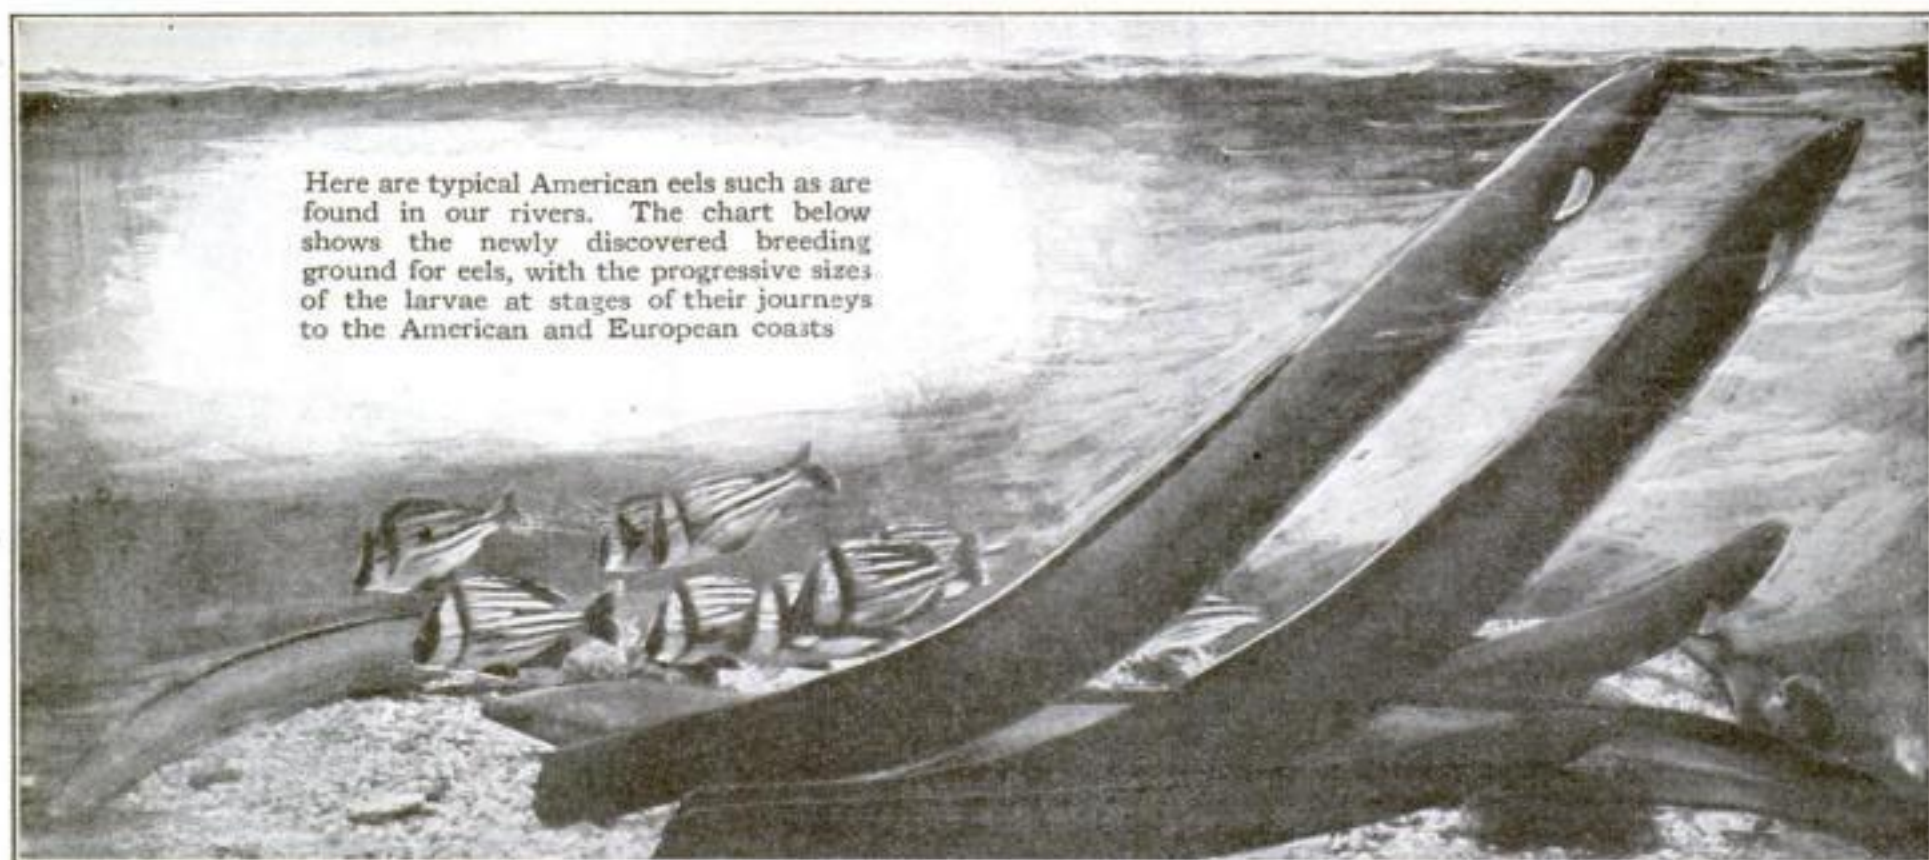


Photo courtesy N. Y. Zoological Society

“WHERE do eels come from?”

This apparently simple question has for many years excited the curiosity of scientists. Strange to say, the eels familiar to us in aquariums and museums have been a complete mystery to naturalists. Nobody had been able to find baby eels. Nobody knew where they were born. The grown eels appeared mysteriously along the coasts of Europe and America, and disappeared just as queerly. Where did they come from?


Now, a Danish zoologist, Dr. Johannes Schmidt, after years of research, has returned from an adventurous ocean voyage with the report that he has discovered a breeding place near the Bermuda Islands, in the Atlantic Ocean, from which all the eels that inhabit the waters of our rivers have migrated.

In 1904 a small transparent leaflike fish about two inches long was captured off the north coast of Scotland. Doctor Schmidt concluded that this was the larva of the common eel found in European waters. He set out in a small ship and fished all over the Atlantic Ocean, charting as he went, following trails which led him to the capture of smaller and smaller larvae, until he finally reached their breeding grounds.

How the Eel Develops

The history of the eel, as discovered by Doctor Schmidt, shows that the larvae during their first year gradually move away from the breeding zone, and by their third summer are off the coastal banks of Europe, in the case of the European eels, where they are about two inches in length. Then a strange change takes place, for the larva shrinks in width and length, becoming round instead of flat. It is then known as an elver, and begins to ascend rivers into fresh water, where it lives and feeds for from six to 20 years.

At some time during this period the reproductive organs suddenly develop, the eyes become larger and the female assumes a silvery bridal coat. Then the eel starts its journey back to the spawning grounds. What happens to the eel from

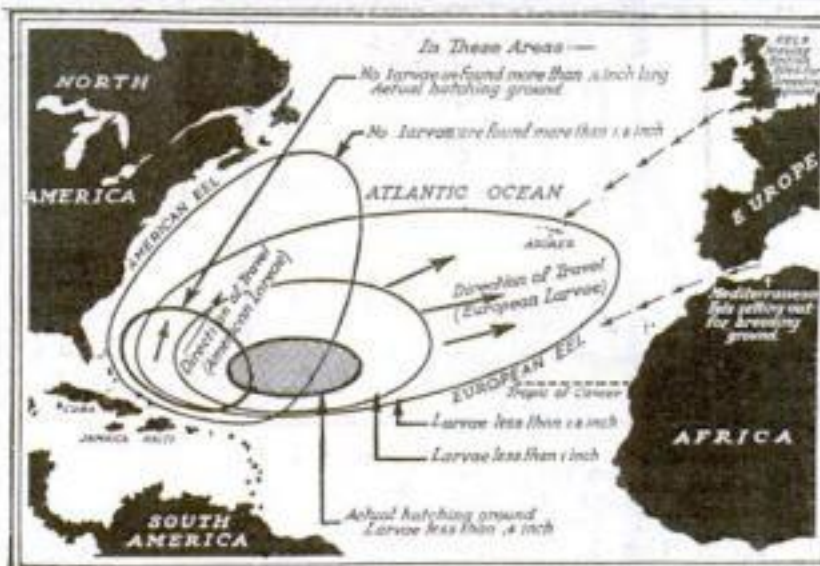


the time it leaves the river to the breeding time remains a mystery. However, it is known that the fish never returns after laying her eggs.

A difficult problem confronted Doctor Schmidt when two species of eels, the European and American, differing radically when full grown, were found together at the spawning grounds. How did the newly born eels know whether to start for Europe or America?

Since the journey to Europe takes a year longer than to America, Doctor Schmidt concluded that those European larvae which started for America, arrived there too soon, before they had grown sufficiently to reach the stage where they could live in fresh water. Therefore they perished before

maturity. Similarly, he believes, no American eels are found in European waters because they require fresh water long before they can get it.

Steel Arms Unload Ore from Lake Boats

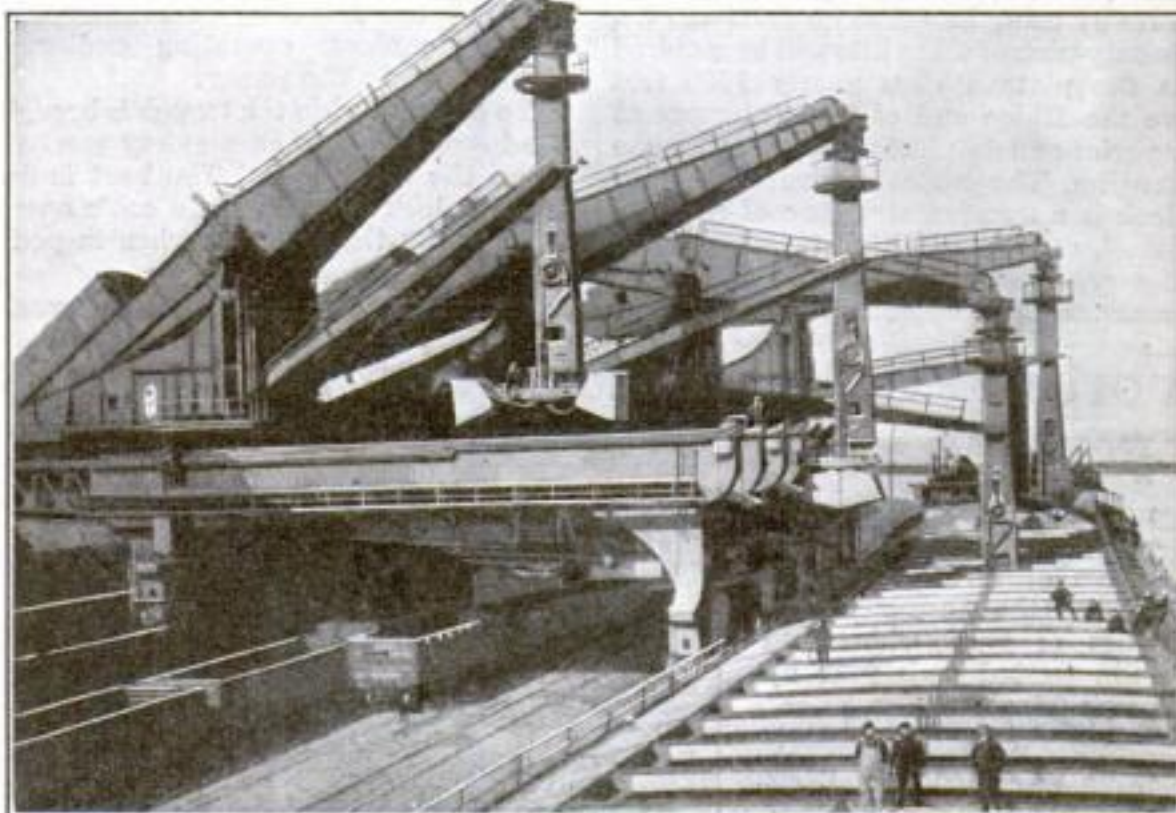

TWO carloads a minute is the rate at which these huge mechanical arms transfer ore from lake boats to freight cars at Ashtabula, Ohio.

Buckets are suspended from long steel plungers, the upper ends of which are pivoted to walking beams supported by movable trucks on rails

Science to Salvage Fuel from Mine Waste Piles

THE critical fuel shortage in the United States, due to diminishing available coal and to unfavorable industrial conditions, is commanding the attention of scientists and inventors, who are experimenting with methods of salvaging vast piles of "coal waste" containing enormous quantities of fuel.



The waste at the mines consists largely of slack—fine screenings of coal dust and dirt-culm, an inferior slatelike anthracite, and gangue, or mineral matter found in coal veins. Improvements in heating apparatus that permit industries to burn much finer coal than heretofore have aroused inventors to attack waste piles which, until recently, have been considered as not worth the cost and trouble of salvage.

Minerals Separated from Coal

One ingenious new salvaging machine works on the principle that gangue, particularly that containing iron, may be separated from the coal if brought into contact with a magnetized or electrostatic field.


The process consists first of crushing the coal waste and then sifting out coal particles of such fineness that they would be likely to form an explosive dust. An explosive-preventing gas is used also to treat the coal, to insure safety and also to remove some of the moisture that might retard separation. The crushed coal and gangue are then dumped into the apparatus for separation.

From a feed hopper, the mixture drops to a feed roll that tends to keep the flow slow but constant, then to the first of a series of electrostatic fields, where some of the iron-containing gangue is charged by electrodes. In passing from one electrostatic field to another, the mineral matter, as it becomes charged, is repelled by the charged electrodes and thrown to one side. Meanwhile, the non-conductive coal passes undisturbed from one field to another, finally falling into a container

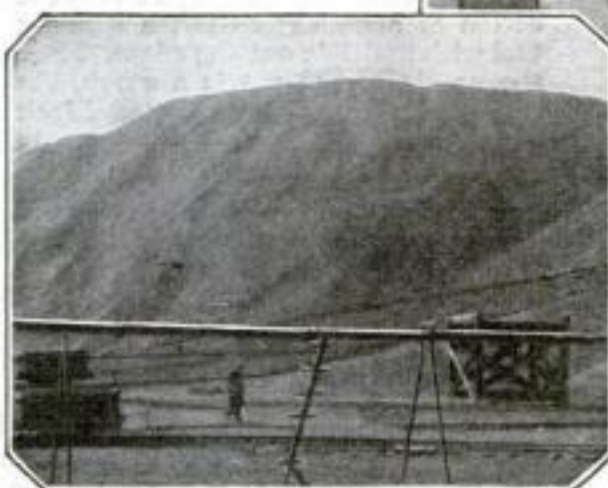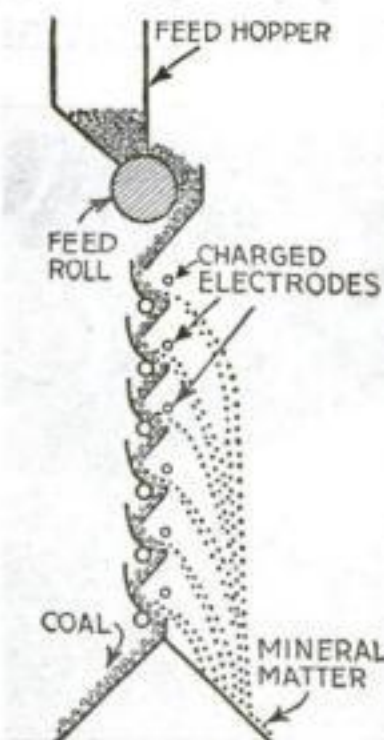

at the side of the machine opposite the minerals.

Thus, in one operation, most of the gangue particles are separated by repulsion from the coal particles. Repeating

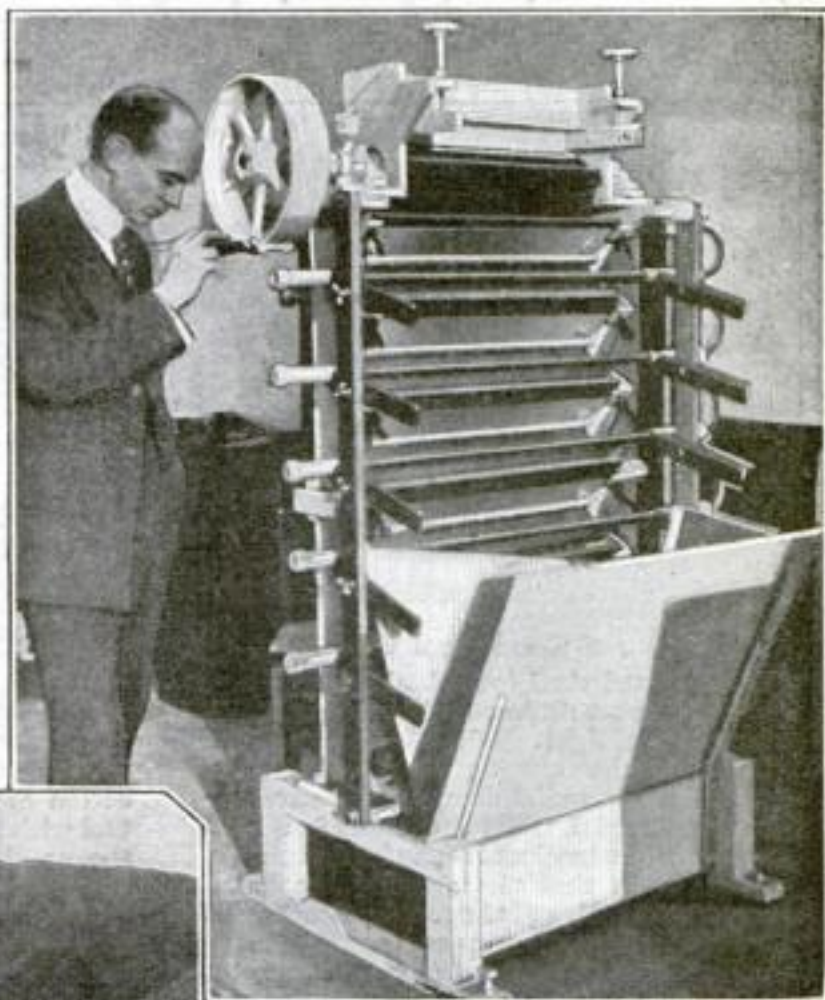

As coal mine waste passes through a series of electrostatic fields in this salvaging machine, mineral matter is sorted from coal by charged electrodes, as shown in diagram

The "coal mountain" shown at left is typical of the piles of waste containing vast stores of fuel waiting to be salvaged at our coal mines

the operation makes the separation more complete. An alternating current with a voltage of 15,000 to 25,000 has been found to give satisfactory results in charging the electrodes.


Eyeglasses Fitted on Plaster Casts of Patients' Noses

BY MAKING plaster casts of the noses of patients who come to him for eyeglasses and spectacles, Dr. Nelson Y. Hull, of New York City, is able to provide glasses that fit perfectly, even if the patient does not appear in person at his office after the first visit, when the cast is made.

Since no two noses are alike, the nose-piece of glasses for each individual patient must be delicately curved and adjusted. Some noses are very hard to fit because of unusual contour, and for this reason patients have sometimes been subjected to tedious fittings.

By using plaster casts, Doctor Hill not only obviates this inconvenience, but keeps permanent records of the

nose bridges of all his patients for future reference—which is found very useful, particularly when filling emergency orders for new pairs of glasses.

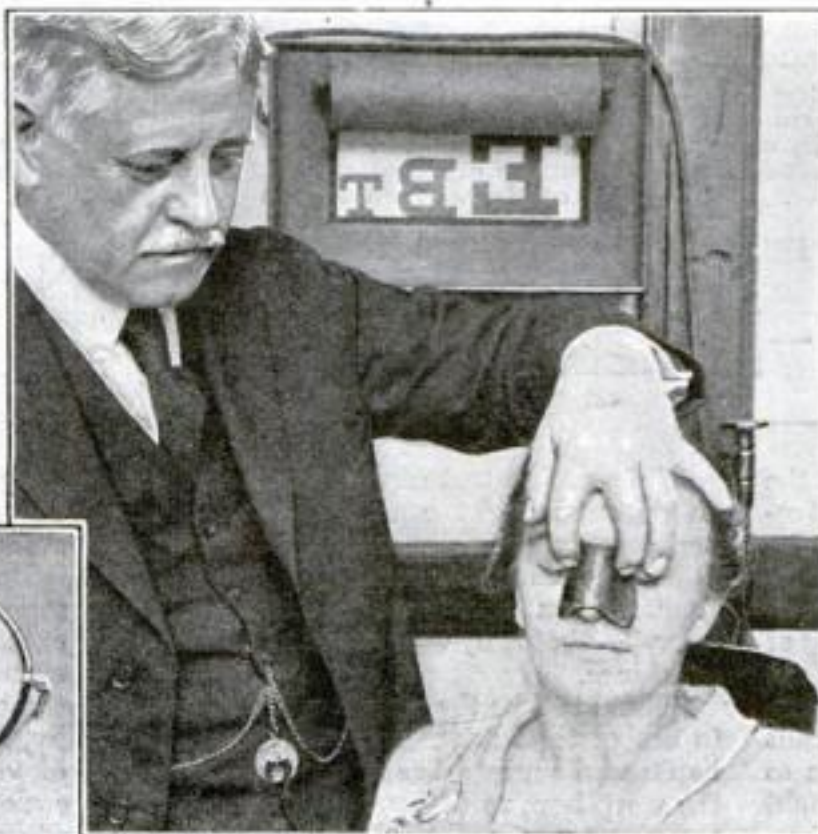

On a plaster cast exactly duplicating the contours of a patient's nose, spectacles are fitted as shown at the left

Markings are made on the plaster cast to indicate exactly where the nose-piece of the glasses should rest. In many cases, Doctor Hull has found it easier to make accurate adjustments on the cast than on the patient's nose.


Cows Thrive on Sawdust

DAIRY cows give just as much milk when a third of their food consists of hydrolyzed sawdust—that is, sawdust resolved into other compounds by taking up water.

The Wisconsin Agricultural Experiment station reports as follows:

"Two groups of three cows each were fed for 70 days. One group received a ration of alfalfa, hay, corn silage, and a concentrated mixture of 60 parts yellow corn and 20 parts linseed meal. The ration for the other three was the same except that hydrolyzed sawdust, made from Western white pine, was gradually substituted for ground corn at the rate of two pounds of sawdust for one pound of corn.


"When the percentage of sawdust reached 40 per cent, two cows failed to eat the mixture well; but when the proportion of sawdust was reduced to one third, no difficulty was experienced."

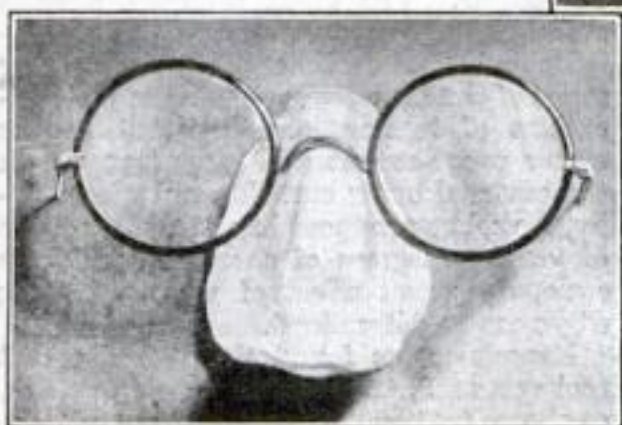

Rainbow Colors Betray Cutting Faults in Tools


Stresses in Materials Measured by Remarkable New Apparatus

Photos © Popular Science Publishing Co., Inc.

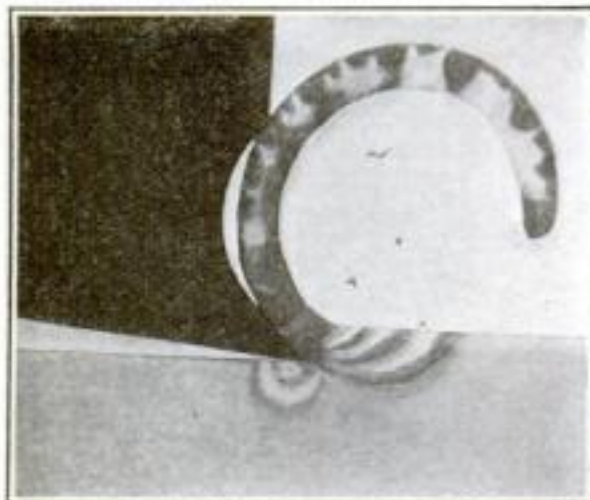


How a Good Tool Cuts

A sharpened steel tool planing a plate of translucent nitrocellulose in a polarized field of light. The color bands in front of the cutting edge indicate variations in radial compression stress in the material, while the bands in the rear measure tensional stress behind the tool. Note that the shaving breaks away at the edge of the tool, indicating true shearing action, as compared with wedgelike action of a dull tool, shown in the third picture

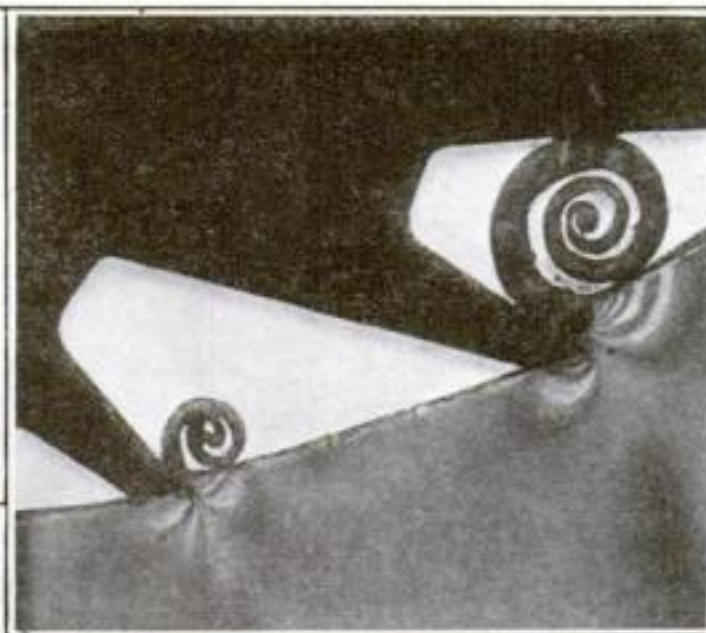

This remarkable photograph shows the action of a milling cutter, a rotating tool with multiple cutting edges. Since the profile of the cut is a curve, the shaving increases in thickness. Black stress patches in the shaving indicate that it is not sheared off as it should be, but is being wedged and torn off by jerky action of the cutter

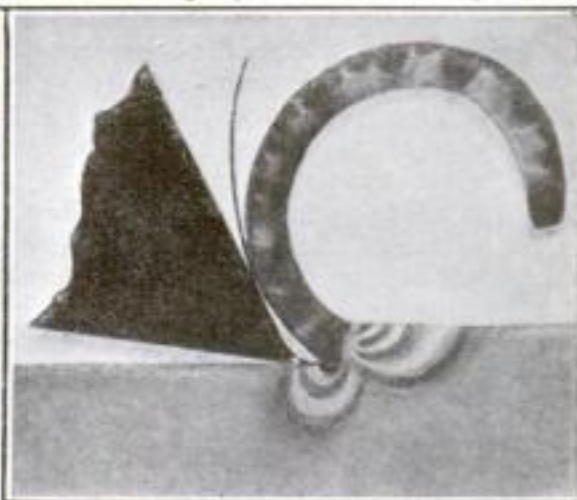

How a Poor Tool Cuts

An improperly shaped planing tool in action. The tool acts as a wedge forced between the shaving and body of material, tearing away the shaving by jerks and producing a rough surface on the material. Note that the imperfect tool has pared off a second threadlike shaving by a double cutting action. Because of the tearing action of the tool the shavings split away in advance of the cutting edge

WHEN you cut a piece of steel or other metal with a dull tool, just what happens in the metal?

Every mechanic recognizes the necessity of having keen edges on his cutting tools; yet the exact effect of dull tools on the material—in terms of strain and stress, in splitting and in jagged surfaces—has remained a mystery.

To obtain scientific knowledge of these facts—of tremendous value in every modern workshop—engineering experts of University College, London, recently discovered a remarkable way of studying the cutting action of tools by means of rainbow coloring of translucent material under stress, when subjected to polarized light. By this method they have obtained colored photographs, reproduced in black and white on this page, of such materials as they appeared during the cutting process.

The polarized light used in these experiments was obtained by passing sunlight through a crystal of Iceland spar. A light ray is caused by a vibration in the ether, which moves back and forth across a straight line that marks the direction of the ray. When this ray is passed through Iceland spar, only those vibrations that strike the crystalline structure longitudinally are permitted to pass, while the other vibrations are arrested. The peculiar property of the emerging ray is that all its vibrations are in a single plane. It is known as polarized light. The light affects transparent materials under stress in such a way as to produce colors that ordinary light would not reveal.

It has long been known that vivid colors are produced when polarized light is passed through a substance under stress. This is

due to the fact that material under tension elongates, and becomes distorted. Similarly, compression thickens the material with corresponding distortion. Thus, a definite pull on a translucent body may be expected to cause a definite distortion, and if light rays are passed through it, the shade and degree of coloring should be in proportion to the amount of stress.

mous saving of power now wasted by ineffective tools. Engineers will be greatly assisted in attaining "the one best way of workmanship."

In the polarized light experiments, nitrocellulose, a transparent substance, is used. While the material is being cut on a lathe, milling machine or planer, polarized light is passed through it in the vicinity of the


cutting edge. When this light is projected on a screen while the cutting operation is in progress, it is noticed that rings of color precede and follow the tool as it plows its way along the material. These rings are of varying shade and intensity and seem to circle about the tip of the tool.

Further tests on stationary materials under known loads have resulted in the compilation of a color scale by which the colors can be interpreted in pounds of stress. Thus, in a cutting


action, a series of concentric circles of color precede the tool, advancing like a rainbow through the material and ranging from black at the tip of the tool to reds that become paler at a distance from the cutter. This indicates that the material is under compression due to the forward motion of the cutter. The black indicates stresses sufficient to break apart the substance.

Behind the cutting point is another series of similar circles; but these are indications of tension, showing that as the cutter progresses it still pulls forward on the material being cut. Thus, by comparing the colors produced in material by edges of varying degrees of sharpness with the scale, the exact effect of various cutting edges can be determined.

Experimenters found that when a dull tool was used, the stresses were enormous, as shown by black fringes about the tool.

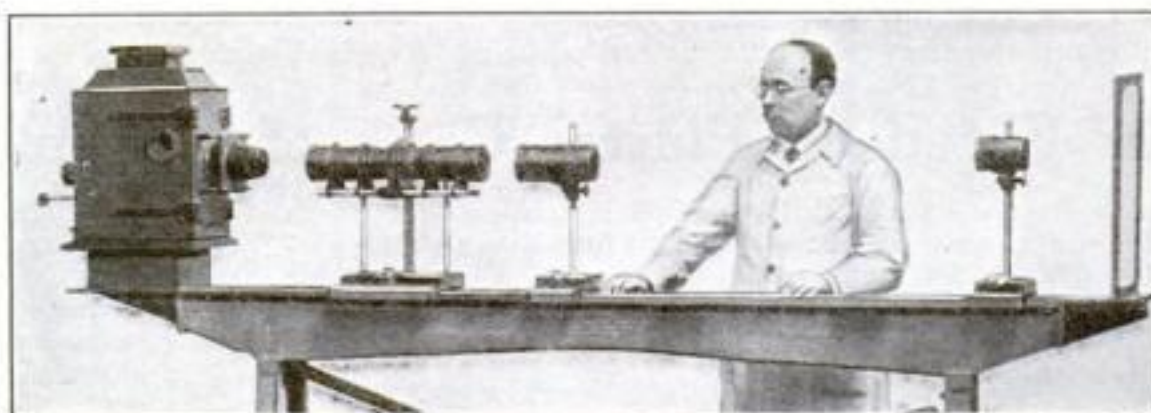

Translating varying degrees of stress in material under load in terms of rainbow colors, this ingenious apparatus for studying the action of cutting tools, explained in diagram below, projects polarized light through the translucent material under observation, and onto a screen. In photo, model was not shown

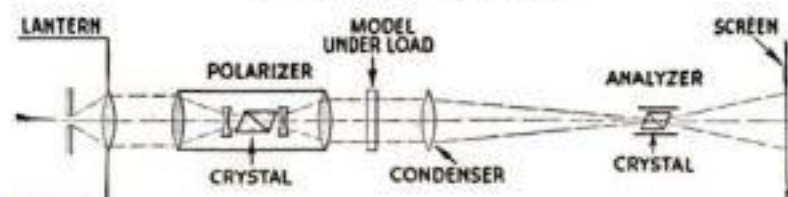

While such a test can be conducted only on materials light can penetrate, the experimenters have assumed that steel and other metals that must be cut follow similar laws and can be studied "by proxy"—that is by analysis of a translucent substance.

Should this be the case, it will be possible to design tools scientifically, instead of by haphazard guesses based on experience in the workshop, as at present. Photo-elastic measurements will indicate exactly the proper depth of cut that should be made when turning or planing a particular material and will undoubtedly result in enor-

New Low Voltage Tube Makes Radio Sets Simpler

Expert Reports Remarkable Success with Simplified Receiving Outfit

By Armstrong Perry

LONGER life for the vacuum tube, greater economy, a more simple and convenient receiving set, and one that may easily be carried about from room to room or to a friend's house—these things are made possible by the use of the new low-voltage electron tubes that require only a dry cell to light the filament.

Despite the whirlwind spread of radio in the past year and a half, there are still literally hundreds of thousands of people who would like to enjoy the advantages and pleasure of having a receiving set in the home, and somehow haven't got around to installing one.

The fact that the electron tube set has required a storage battery for the tube filaments has unquestionably deterred many of these possible purchasers. Not only has the storage battery seemed to them likely to be cumbersome and hard to place in a room, but in addition they have hesitated because of the nuisance of having the battery frequently recharged, and the fear that its acids might ruin rugs.

Portable Outfit for Beginners

Today these radio beginners may start with a single circuit set and the new low-voltage tube lighted by a dry cell battery of the kind used to ring the doorbell. Of course, when the storage battery can be permanently installed, and can be recharged without disconnecting or moving, it remains the stand-by of the full-fledged radio fan. It is essential to loudspeaking results with power amplifiers, and sooner or later every radio user gets to the point when he wants to own a two-stage radio set with a loudspeaker, so that all the family and guests may enjoy the evening's entertainment. So it will be seen that the storage battery is still to be reckoned with. But the fact remains that for the beginner who wants a simple and portable outfit, the new dry cell tubes have saved the day.

When a well-known concern advertised a receiver using tubes that would operate with only a dry cell to light the filament, and the usual compact and light B battery, I was skeptical but hopeful. I lost no time in trying out one of them. That was a year ago. For some time the low voltage tube could not be purchased except in connection with a complete set. Now it is available to any one who has the price, and it can

be applied to any style of tube outfit.

The development in these low-voltage tubes means not only portable radio enjoyment, but it means tubes of longer life; simply because they are cooler than the tubes we have been using.

Some progress has been reported in designing a tube that will operate with a cold filament, but to date the incandescent wire seems to be necessary for practical purposes. There must be a flow of current through the tube without contact between its internal metal parts, because it is by altering the flow of this current that we get sounds louder than can be produced by using only the current the antenna brings in.

A crystal detector set, using only the energy brought in from the distant transmitting station, is limited in its range. The electron tube set, using the energy from the distant station as a trigger to release many times more energy from a local source, is much more efficient.

Electron Tube Principle

In order to produce a flow of current through the electron tube, it seems necessary at present to heat the filament because it will not throw off electrons otherwise. Electrons are the minute divisions of matter that when flowing, make up the electrical current. The filament, when heated, throws them off; the plate, positively charged, pulls them in, and


the grid, standing between the filament and plate, varies the flow. Connected with the antenna, the grid receives the incoming impulses and uses them to alternately hasten and retard the flow of the stronger current and thus make it

ripple like the waves that radiate from the transmitter. These ripples are changed by the action of the phones into sound waves exactly similar to those produced by the speaker, singer, or musical instrument at the broadcasting station.

In the ordinary types of tubes that we have been lighting with our storage batteries the filaments glow brightly. To heat them to incandescence a comparatively large amount of current is needed. Metals deteriorate rapidly when heated. When overheated, as the filament is when we accidentally make a wrong connection and shoot 22½ volts from the B battery through it, it may burn off in a few seconds. At best the filament is shorter lived than we wish it were.


Tube Glows Dimly

The low-voltage filament is long lived because it glows dimly. I took a set using the dry cell tube up to a roof one day, hastily improvised an aerial, and turned on the juice to hear a speech in a town 50 miles away.

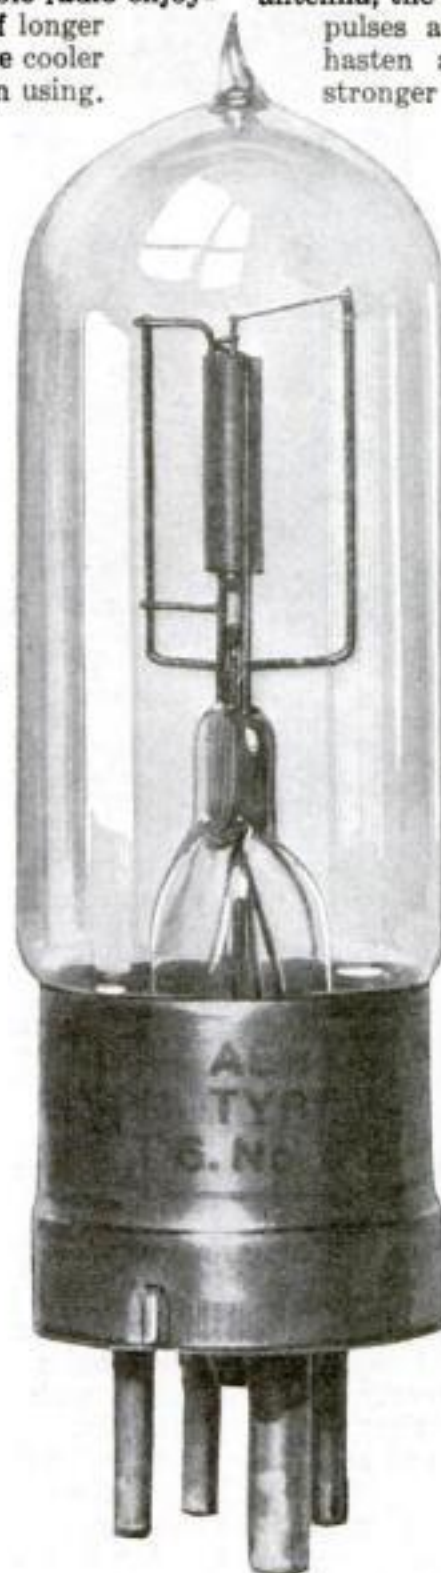


The new low-voltage vacuum tube shown above is a marvel of fine and compact workmanship. The delicate grid and filament, correctly spaced and carefully adjusted, are contained inside a small hollow cylinder that acts as the tube plate.

A two-pound dry cell does the work of a 40-pound storage battery

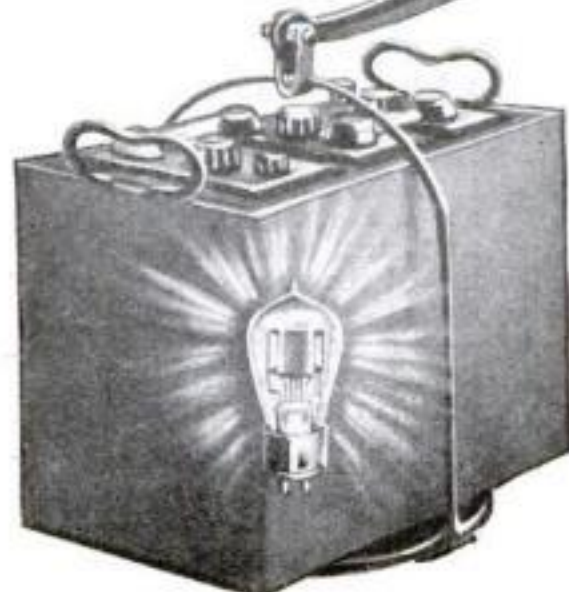

Compare the size of the bulky storage battery in relation to the ordinary high voltage tube (at left) with that of the compact dry cell in relation to the new low voltage tube (at right)

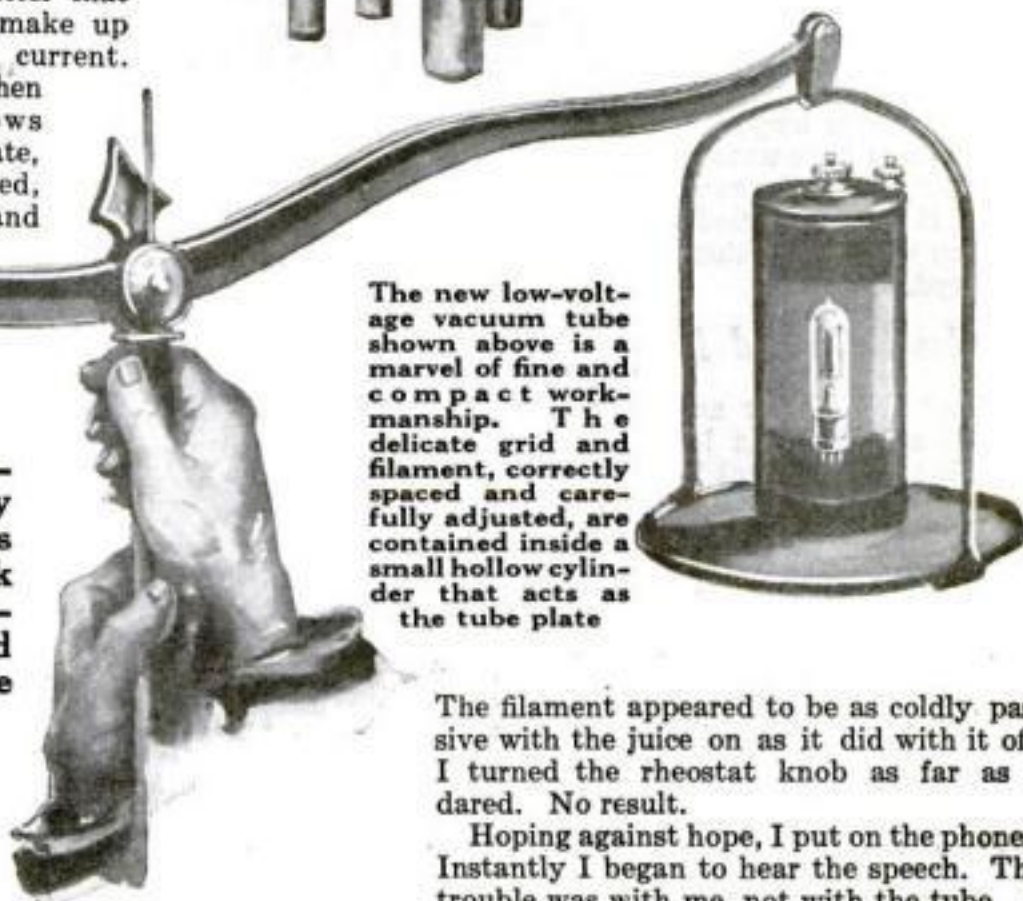

The filament appeared to be as coldly passive with the juice on as it did with it off. I turned the rheostat knob as far as I dared. No result.

Hoping against hope, I put on the phones. Instantly I began to hear the speech. The trouble was with me, not with the tube. I had forgotten the maker's admonition that the filament shines so dimly that in bright sunlight the glow of it may not be seen.

Not so long ago I visited a fellow who had

recently been bitten by the radio bug and had purchased a set with a dry-cell tube. It was all right as far as it went—brought in stations over a radius of two or three hundred miles—but he wanted a heavier volume of sound, so he bought a two-stage amplifier and a storage battery to light its filaments. I listened in with and without the amplifier, and so far as I could judge, the low-voltage tube delivered just as good average results as any other I had tested, both when the detector was functioning without amplifiers and when its output was fed to the amplifiers. I heard Chicago, Detroit, Louisville, Schenectady, and other broadcasting stations without difficulty and I was then in eastern Pennsylvania.

Many Users Satisfied

Recently in Washington it was noised around the government offices that the navy was selling crystal detector sets of very efficient design at a low price and that they could be converted into tube sets without difficulty. Two or three thousand sets were sold to government employees and other citizens. I am informed, and one reliable dealer told me that he sold as many as 50 low voltage tubes in a day for use with these receivers. He said that no complaints had been received and that the users were evidently satisfied with their performance.

Radio experts and dealers are not unanimous, however, on the question of tubes. I asked a salesman who is an expert if he would help me assemble a good low-voltage tube set for a friend.

"Yes," he said; "but you're crazy to get one. They are not nearly as efficient as the sets that use standard tubes and storage batteries."

This man, whose word I have learned to rely on, was giving me the best advice he could from his point of view. The difference in the evidence emphasizes the fact that different men have unaccountably different experiences with the same kinds of apparatus. It is hard to find two experts who agree on any proposition where tubes are concerned.

Tubes Withstand Rough Usage

At my club I saw an expert install a glorified set using six low-voltage tubes. One thing about it that impressed me was the ruggedness of the tubes, which looked exceedingly delicate, but stood up under very rough usage.

Radio experts, when testing out a set, change about the tubes a good deal, and this man was no exception. He tried every tube in every socket times without number. In his hurry—his audience was due in 15 minutes—the tubes rolled all over the place and fell off of boxes and were subjected to varying voltages, yet they all came through alive. Not one broke or burned out during the time they were under my observation.

This ability of low voltage tubes to

stand punishment is phenomenal in view of the delicacy of the filament, which is eight times thinner than tissue paper and only a hundredth of an inch wide. In welding the filament to end supports and attaching these to the springs that absorb shocks, the tube makers perform an oper-



Above is a complete low-voltage tube set, recently marketed, using an ordinary dry cell to light the filament. At right is the adapter that makes it possible to use the low voltage tube in any tube set without changing sockets or wiring. In using the adapter, care must be taken that the storage battery is disconnected from the circuit before the dry cell tube is inserted. Otherwise the tube may burn out

ation that for delicacy has anything the watchmaker does "skun a mile."

The low voltage tube has four prongs, like its larger cousins, but one of the prongs is fatter than the rest, so that it is impossible to put any of the prongs into the wrong holes and thereby connect the filament with a voltage intended for the plate only.

Soon after the new tube was made available to the public, some genius put on the market an adapter that made it possible to use the low voltage tube in sockets designed for the older types of tubes. Now any one who owns a tube set can try out the low voltage tubes without change of wiring.

Any one who has tried to light the old style tubes with dry batteries and has discovered that the batteries run down in a few minutes, naturally asks how long a dry cell will operate the new tubes. The new tubes, while using 1.1 volts as compared with the four to six volts required by the old, pull only 0.2 amperes as compared with 0.75 to one ampere required by the higher voltage tubes. The power consumption of the old type tube is three to five watts in the filament; in the new type it is only 0.25 watts. So an ordinary No. 6 dry cell may

last 90 hours or more, provided it is not used more than one hour in 24. The life of a dry cell is shortened by drawing on it for long periods.

The ordinary types of B batteries are used with the low voltage filament tubes. The plate takes the ordinary voltage—22½.

An increase to 30 volts may improve the results slightly.

The first of the low voltage tubes was not adapted for use as an amplifier, but the manufacturers have now produced an amplifier tube that also can be lighted by dry batteries. It can be used for increasing the power of a crystal detector set.

Radio on the Road

This victory of the dry cell tube in making possible a light, compact receiving set of long range, marks an important epoch in the extension of radio usefulness.

Now we can take our radio set with us wherever we go, receiving the best that the air has to offer. We can pack our receiving set in the bag with our collars and toothbrush. On our hunting or fishing trips, or on our auto camping expeditions we can tote it along with little trouble.

With a portable tube receiver and an antenna plug for connecting with

lighting circuits, the traveler can keep in touch with the world from his hotel room. Or, by stringing a short length of wire or using a coil aerial on his automobile, he can make it a traveling radio station without carrying bulky apparatus.

More important still—the dry cell tube receiver will carry the joys of radio to thousands of persons to whom it is still an unknown mystery. Contrary to the general impression among radio men that almost every one was initiated to radio last winter, I discovered during a recent trip through small towns and country districts in six states that more than 90 per cent of the folks I met had never heard anything about radio. Most of them never had seen a radio set.

Thousands to Learn of Wireless

To these thousands, salesmen with portable sets now can carry radio. In demonstrating their goods they will find an enthusiastic welcome.

Finally, think of what the portable receiving set will mean in carrying cheer to shut-ins, entertainment and education to out-of-the-way places, and up-to-the-minute information to offices and workshops.

No longer is the enjoyment of radio programs confined to those who can afford a storage battery. The introduction of the dry cell tube has halved the cost of a vacuum tube outfit.

To make a long story short, radio has caught up with the cartoons which, in the hectic winter of 1921-22 pictured for us the manifold possibilities of this marvelous agency for carrying the human voice to listeners hundreds of miles away.

A Low Voltage Tube Set for \$20

OUR radio editor has just completed a remarkably simple and easily tuned low-voltage tube set at a total cost, including phones and aerial, of about \$20. Every reader will be interested in the construction of this outfit. It is to be fully described in the April issue.

Hunters with Lasso Capture Polar Bears Alive

COWBOYS of the Western ranches whose business has outgrown their art, except in the movies, have found a new field in the Far North, using their lassoing skill to capture live polar bears. A recent expedition employing about a hundred men skilled with the coiled rope, recently caught about a thousand full grown bears in this way. Some of the bears were killed for their meat and skins, while others were kept alive to be sold to zoos.

The polar bears bask on ice floes. The hunters' boat, a fishing schooner, was maneuvered in and out of the ice floes until a bear was spied. Seeing the boat approaching, the bear invariably took to the water and the hunters found that they could effect a capture only by following him with an auxiliary high-speed power launch.

When the power boat came within casting distance of the bear, a skilled rope artist threw a lasso over the animal's head, manipulating the rope so that the bear struggled to



Captured alive, a full grown polar bear is hauled aboard ship after the animal is lassoed, as shown at right. Nearly 1000 bears were caught in this manner during a recent polar hunting expedition

release himself. The result was that the bear worked his head and shoulders through the loop and the rope could then be tightened without danger of strangling the animal.

As soon as the bear was securely roped, the launch towed him long-side the ship and he was drawn aboard by means of a derrick. The hunters report that the sport was equal to anything they have ever experienced, for long battles were sometimes necessary before the animal could be hoisted aboard the schooner.



Automobile Body Skeleton Serves as Chassis Frame

A "FRAMELESS" automobile chassis, radically different in principle from the conventional design, was an interesting feature of a recent Paris automobile show. Although the question of just how a car of this general type would perform over rough roads, is a disputed one, experts generally agreed that some of the principles employed may find wide use in the future.

An important advantage of the new frameless car is its extraordinarily light weight and comparatively simple construction. The body of the car is the only structural member connecting the front and rear axles. Metal sheeting cut out with a die performs the double service of carrying the weight of the body and its contents as well as taking the place of the chassis frame.

Metal Frame Can Be Enamelled

It is this arrangement that gives the car its light weight, while the strength is as great as that of a heavy frame. A secondary advantage is that durable baked enamel finish can be applied throughout, whereas the present wooden frame prevents the use of high temperatures required in the application of this process.

The suspension and air brake ar-




Spring suspension and brake arrangement of front wheel, showing cylinder mounting in which coiled springs and a piston operating against water pressure absorb shocks

rangements on the front wheels are other unusual features. The front wheel is mounted to slide on a vertical guide pressing against the action of coiled springs and, through a piston, against water pressure in a vertical cylinder situated alongside the wheel. This arrangement eliminates the springs and shock absorbers now in use.

Brakes are provided on all four wheels, those in front being operated by a wire cable attached to a lever, the movement of which governs the brake band. All four brakes are operated simultaneously by pressing on a single foot pedal.

A Vacuum Clothes Brush

THEY are saying good-bye to the whiskbroom in barber shops in Chicago. Attendants are using a small vacuum type dust collector, weighing no more than the electric flatiron. It is far more hygienic than the whiskbroom germ scatterer.

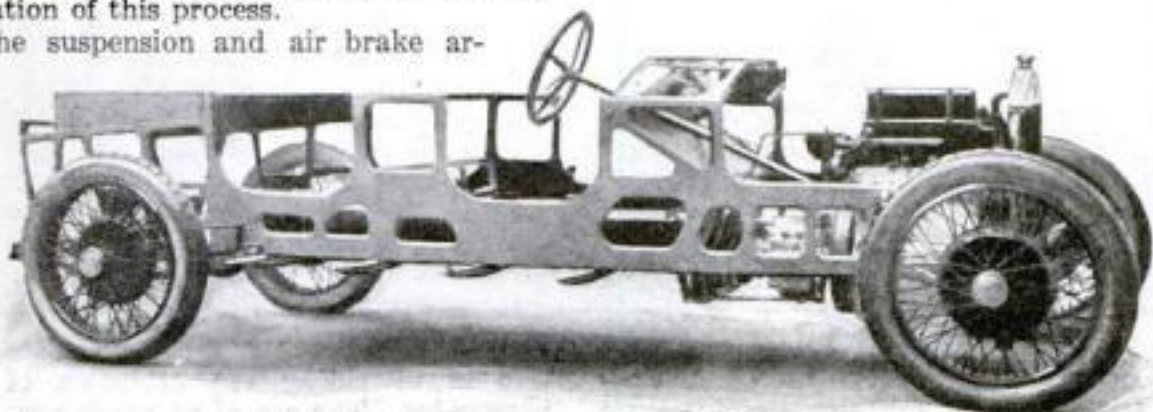

Photos courtesy Automotive Industries


A light sheet metal skeleton—the only structural member connecting front and rear axles—takes the place of a chassis frame in the new "frameless car"

Suction Knife to Revolutionize Slaughterhouse Methods

DESIGNED to eliminate the barbarity of slaughtering methods now in general practice, a new butchering device, manufactured by a concern in Kansas City, Mo., provides a cleaner and quicker method of killing animals.

The mechanism consists of a suction pump to which is attached a hose equipped on the end with a sharp blade. As used in slaughterhouses, a centrally located vacuum pipe provides the suction for a battery of blades. The animals are hoisted and suspended from a rod by chains attached to their hind legs. The "sticker" inserts the blades in the animals' throats and the suction draws the blood from their bodies in 43 seconds. Thus, the animals die in a

Blood is saved by clean, quick suction method shown below

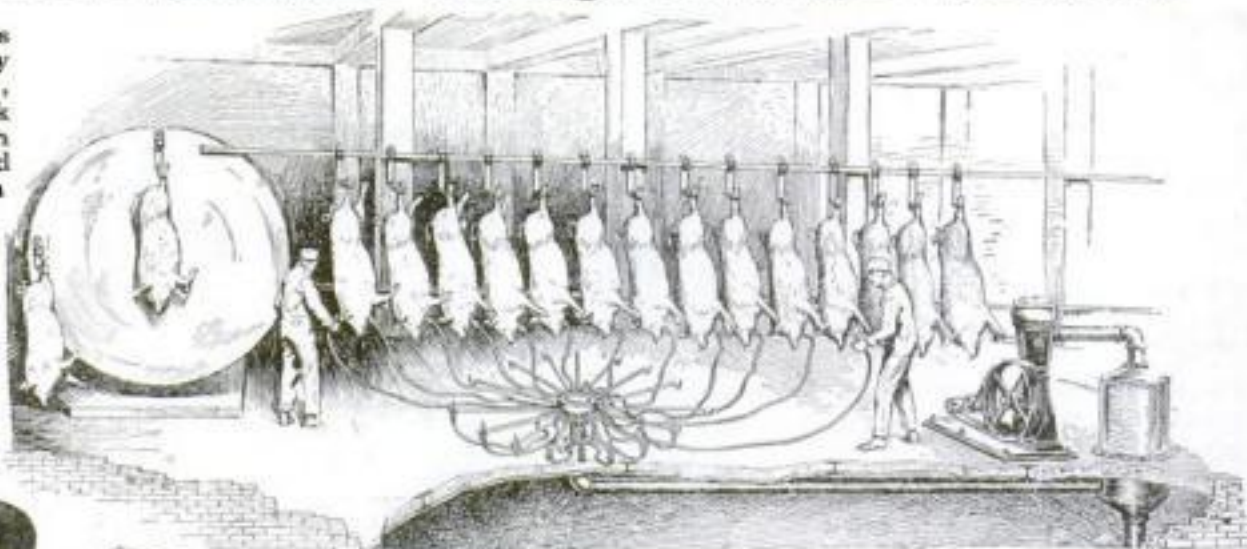

In the slaughterhouse, suction for a battery of knife blades inserted in the animals' throats is supplied from a vacuum pipe

most humane way and their blood is conserved and kept clean throughout the entire operation. In cleanliness, the invention will transform slaughterhouses, where butchers now wade in blood as they work.

Although the present tendency in butchering

is to relieve suffering as much as possible, yet killing by the present methods requires from two to five minutes. The saving that may be effected by the new slaughtering implement may be realized when it is considered that the line of cattle, sheep, and swine killed each year in America for food and serums, would extend a distance of 181,000 miles, or about five times the distance around the world.



Easily Fitting Pipe Wrench Threadless and Nutless

ONE of the recent additions to the pipe-fitter's toolchest is a threadless and nutless pipe wrench, invented by Walter I. Brockover, of Tipton, Ind., which can be used on pipes of varying sizes without preliminary adjustment.

The wrench consists of three parts: a handle and upper and lower movable jaws. The upper jaw and the handle each have two arms that are pivoted in such a way as to allow room for motion of the lower jaw about its pivot in the handle.

In use, the wrench is hooked over the pipe and the lower jaw is raised to contact with the other side of the pipe. Bending the wrench by pressing down on the handle causes the lower jaw to move forward and the pipe is thus very firmly gripped by the teeth of the jaws.


To release the pipe wrench, it is necessary only to raise the handle. The lower part is drawn back by this motion and the teeth are disengaged.

Three-Wheeled Auto Built of Old Parts

FROM a few spare Ford parts of standard type and connecting parts made at home, J. O. Michaud, of Fort Kent, Me., has built a serviceable three-wheeled automobile.

The Ford parts used were three front wheels, front wheel steering spindle, rear axle, drive shaft, pinion ring gear, and bearings. The chassis frame was of iron pipes, while the reducing coupling, the transmission, and the drive shaft housing were made from available material.

A nine-horsepower engine from an old car gave satisfaction. The entire car weighs 610 pounds.

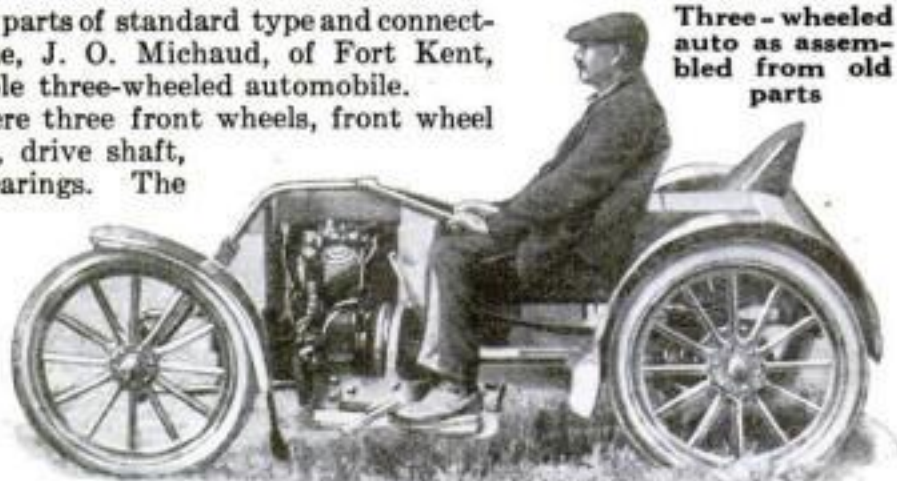

Three-wheeled auto as assembled from old parts

Sea of Soapsuds Novel Window Display



BY FORCING compressed air through a soap solution in an electric washing machine, a furniture store has adopted a novel window display scheme which has proved effective in attracting the attention of passers-by. The sea of soapsuds produced covers much of the display.

play scheme which has proved effective in attracting the attention of passers-by. The sea of soapsuds produced covers much of the display.

Photo courtesy American Museum of Natural History



This monster South American bat is first cousin to our leather-winged species. Scientists now say bats may be used to police our homes against insects

Until recently the bat was one of the least known American mammals. There are 150 species, some of which have as large a wing spread as five feet

Proposes Pet Bats to Drive Insects from Our Homes

RESearch that soon may result in the employment of the ordinary leather-winged bat to police our homes against flies, insects, and mosquitoes, is now being carried on by certain scientists who have undertaken a thorough study of the subject. San Antonio, Texas, and some cities in Florida have already used bats successfully to fight malaria bearing mosquitoes.

These men picture the bat making its home in a dwelling, darting here and there, and killing all invading insects. To prove this is entirely feasible, they introduced two bats into their own homes after being bothered by mosquitoes. The result was that

the bats disposed of all of the insects in a single night.

Two difficulties have arisen, however. In the first place, they have not yet found an adequate way to keep the bats alive in captivity. They feed only while on the wing, and unless supplied with large numbers of insects, do not get enough food when kept in a laboratory. Secondly, since the bat is little more than a winged mouse, women feel somewhat timid about having such a policeman around the house.

The real importance of the research lies in the discoveries of the value of bats as destroyers of insects that damage crops on farms and as annihilators of mosquitoes.

They are confident their studies will enable them to devise a way to keep bats in captivity so that they may be domesticated to farm uses.

The bat is a nocturnal animal, hiding in dark caves in the daytime. Some varieties migrate with the seasons, while others hibernate, hanging suspended from roofs of caves by their hooked claws, sleeping for periods as long as ten weeks. They never build nests.

As soon as young are born—never more than two to a pair—they attach themselves to the breast of the mother bat, remaining with her until they have gained strength enough to fly.



Converted Auto Mirror Is Useful in Rowboat

TO A person rowing a boat, a knowledge of what is going on behind him is even more important than to one driving an automobile, and therefore the automobile mirror has been put to this second use.

Attached to the side of the boat immediately in front of the rower and tilted to reflect images at the proper angle, the mirror affords a good view of what is ahead, making it easy to keep the boat in its straight course and avoid collisions.


Nearly Two Billion Stars

LATEST estimates made by scientists of the Royal Observatories at Greenwich, England, are that there are approximately 1,600,000,000 stars. Of this number between 3000 and 4000 are visible to the unaided eye. The late Franklin Adams made a set of 206 photographs covering the entire sky from which it was possible to estimate the number of recorded stars at about 55,000,000.

"Talking Lamps" Warn Autoists of Danger

"TALKING" signal lamps, with complete traffic regulations printed on their sides for the benefit of the passing motorist, are being widely used in some of the larger cities and at dangerous crossings.

The lamps are of two types, one of which is a lamp box on a pedestal, supplied with red lamps that flash regularly night and day. The other type is similar, except that the lamp box rotates.

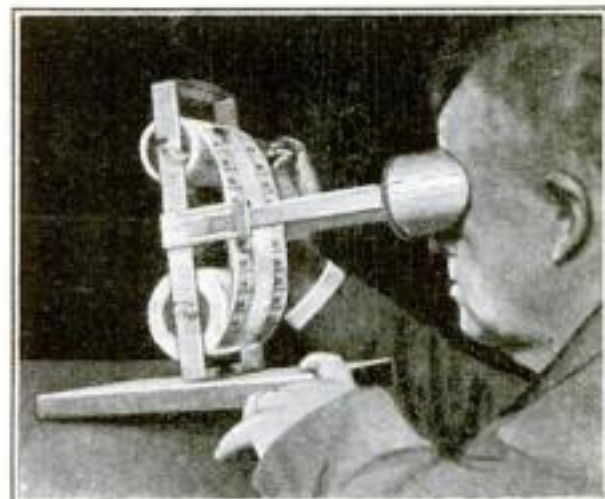

Workman Studies Expert's Actions in Movie

IN ORDER to instruct workmen in the best methods of manipulating a machine or performing an industrial operation, Major Frank B. Gilbreth, noted efficiency expert, has perfected a small stereoscopic movie machine that enables the workman to study each movement of an expert in minute detail.

When a man accomplishes results in a minimum of time with the least exertion, he is termed an expert. To educate other workmen to become experts, this man can be used as an example. Stereoscopic motion pictures are taken of the expert in action and printed upon a paper roll. To each of the separate pictures is attached a caption that calls attention to the faults or correct actions of the individual in the picture. Thus a study of an expert's actions can be made by the less experienced man by observing the film through a stereoscope while continually passing before the eye the successive movements that go to make up a complete operation.

Each device for taking these pictures includes a microchronometer, or rapid clock, that records the time on each picture, which shows paths of motion, as well as the exact time taken.

Why Boilers Explode—This One Traveled 200 Feet

THE most spectacular recent boiler explosion—just one among the 500 that annually snuff out from 700 to 800 lives in the United States, causing property loss of more than half a million dollars—occurred in a sawmill



The price of carelessness—all that remained of the sawmill

at Le Roy, Ohio, when the shattered boiler was hurled high across a stream for a distance of 200 feet from its foundation.

The boiler was of the horizontal tubular type, 30 years old. It was designed for a



— 200 feet —

pressure of 80 pounds. Two years previous to the accident, the operator had increased the pressure to 100 pounds, but later, it is said, he adjusted the safety valve, as he thought, to blow off at 80 pounds as before.

Some Causes of Explosions

Although the safety valve could not be found after the explosion, it is believed that it may have been screwed up for a higher pressure rather than down.

Aside from carelessness, some of the chief causes of boiler explosions that could be avoided are summed up by experts in a few simple "Don'ts," the most important of which are:

Don't fail to test the water gage every day to make sure that the boiler contains the proper amount of water.

Don't neglect to test the safety valve every day.

Don't forget that a badly scaled boiler is unsafe.

Don't neglect the steam pressure gage or fail to have it tested



The wrecked boiler lying where it landed, 200 feet from the mill

occasionally—say, about once every year.

Don't try to raise steam in a cold boiler too quickly.

Don't depend on others to see that everything is all right.

Master Gear Molds Perfect Gear Teeth in White Hot Blanks

INCREASED accuracy and greater wearing qualities in the production of toothed gears of all types have been achieved recently by the invention of a revolutionary machine that forms gear teeth by rolling a plastic, white hot gear blank in mesh with a water cooled, accurately formed master gear.

Gear Teeth Hot Rolled

Replacing the usual method of cutting the gear teeth cold from blanks in milling machines, the new hot rolling process is said to be one of the most important developments in the machine tool industry in a decade. Hot rolled gears already have been adopted by several automobile manufacturers, and are said to represent an important saving in time and material.

The drop forged steel blanks from which the gears are made are similar to those supplied to standard gear cutting machines, except that they are from 20 to 40 per cent lighter, since the rolling process uses all the material in the blank, whereas the cutting process necessitates cutting away a large amount of the material.

The blank is heated white hot in a small gas furnace at one end of the machine. Then it is mounted in the machine and a gear die is gradually brought into mesh with it as the two rotate in unison, the


die slowly meshing deeper and deeper until the hot blank is a perfect mate for the die. In twenty seconds the job is finished and the machine is ready for another blank.

The machine has four bevel gears, as shown in the close-up view on this page. Two large gears drive the two shafts of the machine in perfect unison. Inside one of the big bevels is the die gear and opposite, meshing with it, is the finished hot rolled gear.


When the hot blank is placed in the machine, it is held securely by the action of a hydraulic or pneumatic cylinder located on the end of the shaft upon

which the blank is mounted. The shaft that turns the die gear is connected by bevel gears with an electric motor.


The other end of this shaft has a large

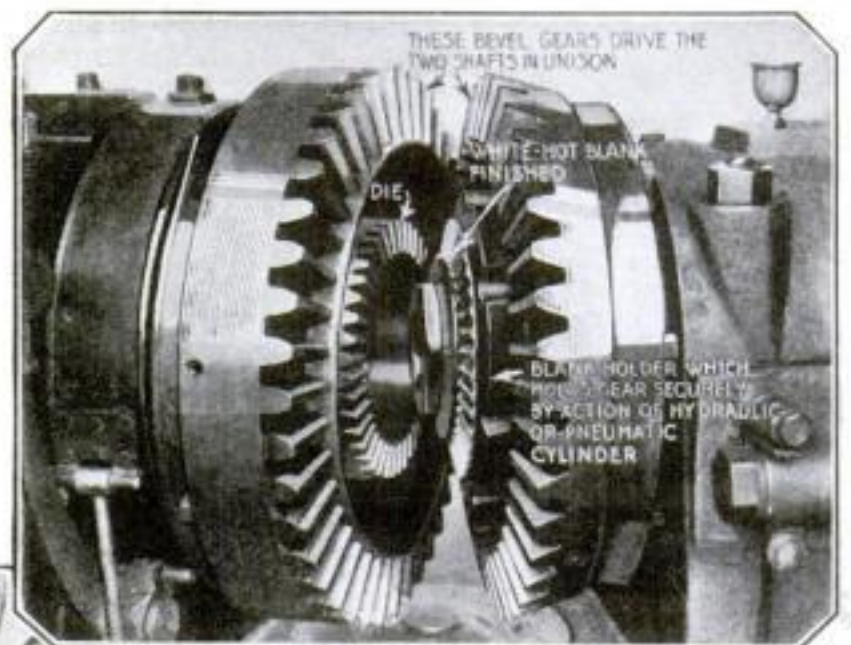

Close up of the gear rolling mechanism, showing large bevel gears that drive the die and blank shafts in perfect unison, and, within, the die and finished gear blank

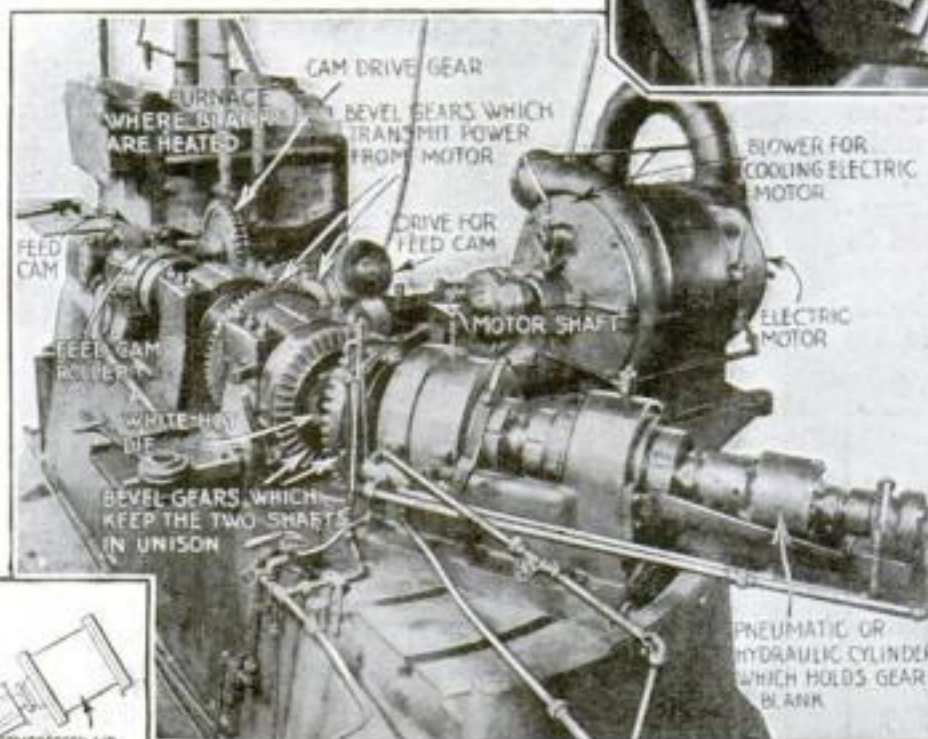

In this machine the teeth of a perfect gear die are pressed against a white hot gear blank, as shown in diagram, until the blank is a perfect mate for the die

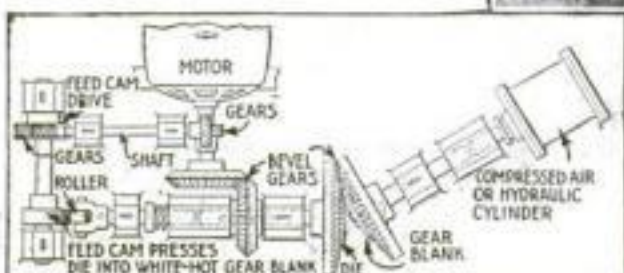

roller against which the feed cam bears, and is rotated by the large drive gear. This gear is operated by auxiliary gearing from the motor shaft.

The motor does not run continuously in one direction, but instead, makes a fraction more than one revolution, then reverses to make a little more than a revolution in the other direction. The movement in one direction is slightly less than in the other so that no two revolutions bring the same teeth of the die into action.

A 5000-Mile Trip to the Arctic in a Flying Boat

IN THE most complete and luxurious flying boat ever constructed, six nationally known American sportsmen, accompanied by four newspaper and movie men and a crew of three, will fly from New York to the Arctic Circle next summer in an effort to establish an aeromarine line that will bring New York within 72 hours of the Arctic.

The Sailing List

The sportsmen who have said they will make the trip are I. M. Upperco, president of the Cadillac Motor Car Co.; Howard E. Coffin, president of the National Aeronautical Association; Harold H. Emmons, president of the Detroit Board of Commerce; Dr. James W. Inches, police commissioner of




© Aeromarine Airways, Inc.

Businessmen-Hunters to Travel in Ship of Luxury

Workmen are shown above putting the finishing touches on the spacious flying boat in which six American businessmen-sportsmen

will travel from New York to the Arctic Circle over territory shown on the map at the right. The diagram below shows arrangement of cabins

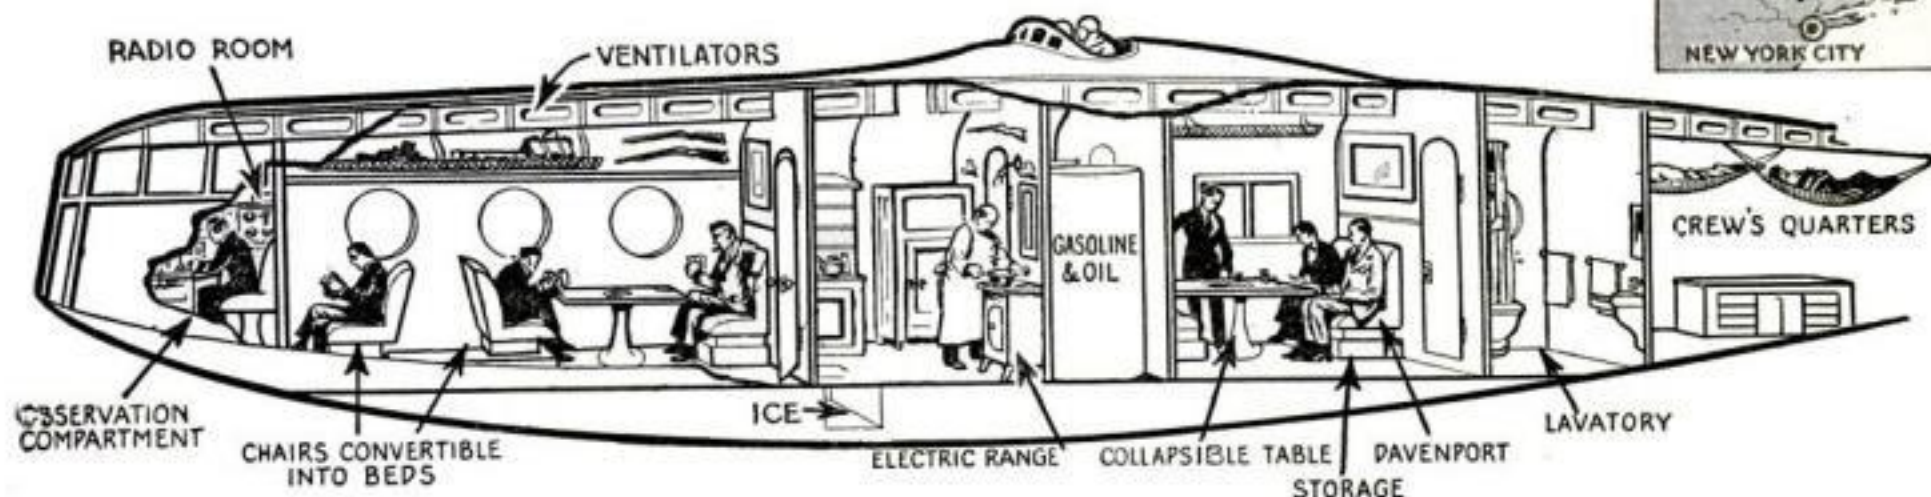

Detroit; William E. Metzger, president of the Detroit Athletic Club, and Charles Redden, president of Aeromarine Airways.

The flying boat, for which the hull and cabin are now complete, will have a wing spread of 104 feet, and will be driven by two 400-horsepower Liberty engines. The entire machine will weigh 7½ tons, and will attain a maximum speed of 100 miles an hour.

An Infinite Variety of Scenery

The journey of 5000 miles will take from two to four weeks, since it will be made by easy stages. Leaving New York, the boat will go to Montreal, and from there will follow the Ottawa River and a chain of lakes northward through Quebec to James Bay, thence through Hudson Bay to the Arctic Circle, where the sportsmen will enjoy themselves shooting caribou and other big game.

Complete equipment, an electric range for cooking, convertible beds that turn into chairs in the daytime, and an inclosed observation compartment at the nose of the machine will be just a few of the conveniences embodied in the boat. The radio outfit will have both the loudspeaker and head phones. Several broadcasting stations have arranged to give special radio programs for the sportsmen, supplying continuous entertainment throughout the trip.

The epoch-making air voyage was conceived by C. F. Redden who, while flying over Quebec recently, became impressed with the possibility of flying over water to the Arctic Circle. He declares that the journey involves no danger and will provide novel sport for the tired business man.

Plow, Harrow and Roller Combined

A ROTARY soil tiller that performs simultaneously the operations of plowing, harrowing, rolling, and disk-ing, has received the approval of an English horticultural society.

The motive power is supplied by a single cylinder engine, giving 4.17 horsepower at 1800 revolutions a minute. The power is transmitted through worm gearing to a set of eight spring

tines located side by side on a shaft extending across the machine. These tines, rotating at high speed, churn up the soil to a depth depending upon the setting of a shoe in the rear, which can be adjusted in five different positions.

Part of the power is transmitted to a pair of wheels on either side of the machine, which serves to move the tiller forward at any desired rate. The machine is kept in line by the operator, who walks in the rear of it.

When it is desired to use the implement as a power plant, it is necessary merely to throw out the clutches and connect the engine with the machine by belting. The entire machine weighs only 350 pounds.



By turning a handle in this combination power plow, harrow, disk and roller, the operator controls its movements. In diagram, note tines that rotate at high speed, churning the soil

Science Opens Wonder Caves to Tourists

Marvelous Lighting Systems, Safe Underground Paths, Automobiles and Good Roads, Combine to Exploit Nature's Age-Old Cavern Architecture

IN THE Shenandoah Valley of Virginia, where many of the historic battles of the Civil War were fought, science is putting the finishing touches on marvelous works of underground architecture begun by nature millions of years ago, and is converting them into scenic attractions of rare beauty to entice the touring public.

Electric lights, tunneled pathways, automobiles, good roads and many other modern achievements are being combined in one commercial project, backed by a rapidly growing organization known as the "Cave Men's Club of America," to draw nature lovers from all parts of the world to the portals of natural caves surpassing in size, beauty, and perfection anything that human builders have ever done.

Natural caverns, with their glistening stalactites and stalagmites—long varicolored and rock-like icicles of crystal—have been exploited in a haphazard way for centuries. But during the past year, the conversion of caves into show places has developed into an amazing business enterprise, especially in the Shenandoah Valley.

Many of the most fantastic caverns in America are in this valley, which runs northeast from Staunton, Va., to Washington, D. C. Of these the best known are the Luray Caverns, which have displayed Nature's wonders to thousands of visitors for many years. But it is only lately that the Endless Caverns, four miles south of Newmarket, Va., in the Massanutten Mountains, have been vying with the Luray caves, due to the completion of modern improvements and roads.

A few million years before the prehistoric mammoth went crashing through the jungle of his native haunts, the irresistible forces of nature began the preliminary work of building the Virginia caverns.



O. Josh Wilson, oldest cave guide, at Mammoth Cave, Ky., has shown the caverns to 36,000 visitors, handling fees aggregating \$108,000



The only home in the world ventilated by cave air is Limair, owned by T. C. Northcutt, of Virginia. At the extreme right is an air shaft with corridor leading cave air from it to the residence


But probably it was not until centuries later that the excavations actually were in progress. This is how it was done:

Ages ago, a tiny stream crept through fissures between the rocks, dissolving and gnawing away the limestone. In time, the stream grew to be a river, which enlarged the cavities into chambers and passages, leaving sentinels of jutting rocks of various sizes. Before the erosion was complete, the building of the lime, or calcite, structures began—a work that is not yet finished.

The manner in which the limestone was chiseled away is one of the most interesting of Nature's works. Ages ago level strata of limestone, formed on a lake or ocean bed—


caused by shrinking of the earth's crust or by local geologic action.

Because rainwater contains carbon dioxide derived from the air or from decaying vegetation of the soil, it has the properties of dilute acid and is able to dissolve limestone, thus forming caves in the limestone formations through which it filters. The rain, of course, found entrance through cracks and crevices. It dissolved some of the limestone. Then, as the water evaporated, the lime was deposited again in the form of great "icicles," of which those hanging from the roof are called "stalactites" and those formed by drops that fall to the floor are called "stalagmites."

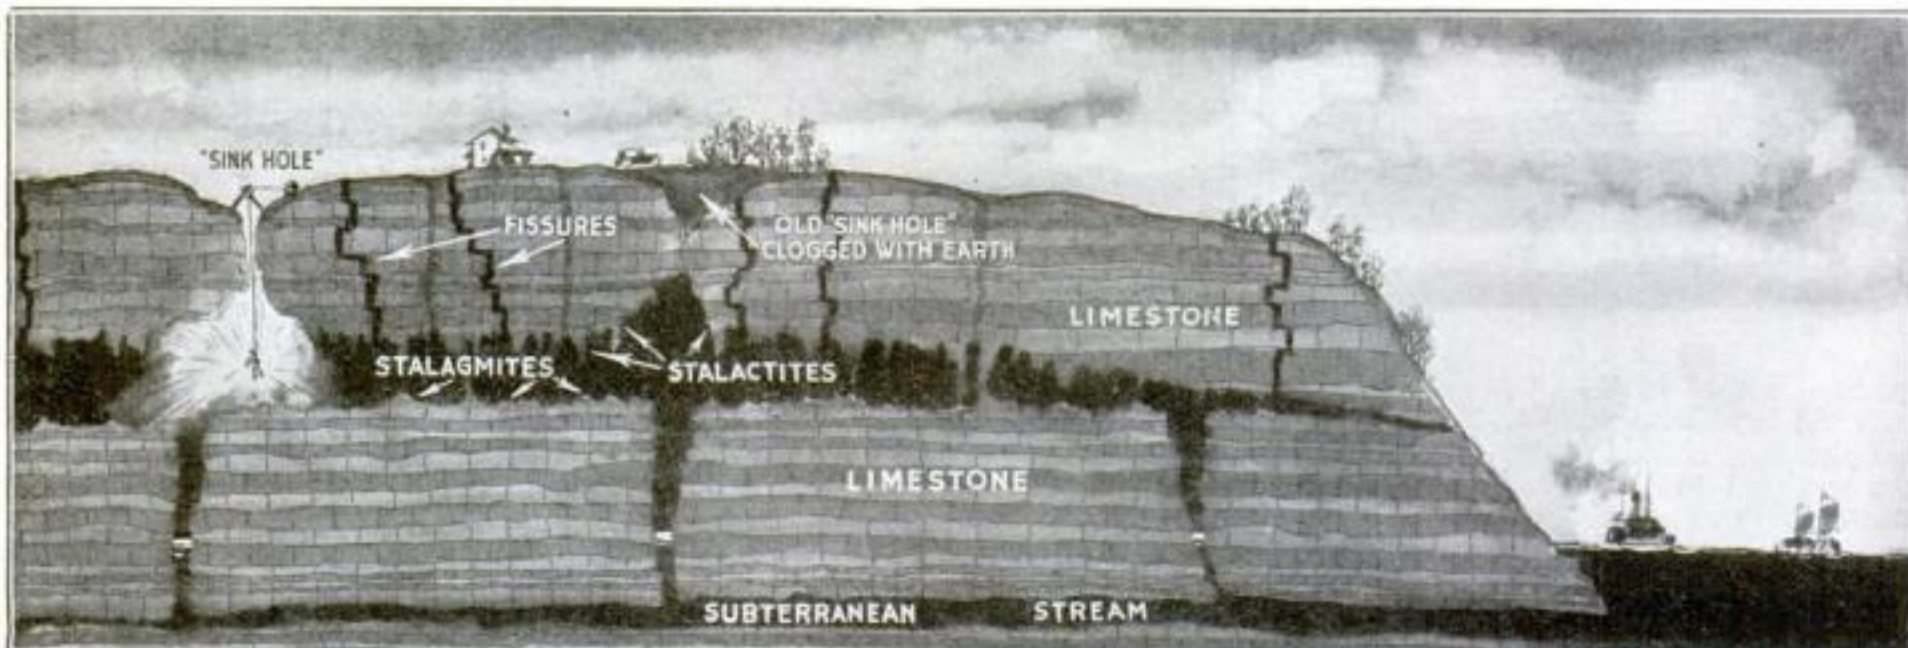

How marvelous Shenandoah Valley caverns were formed. Strata of limestone, broken by the shrinking of the earth's surfaces, are attacked by rain water containing carbon dioxide, which dissolves the limestone strata, chiseling out caves

indicated by dark portions in diagrammatic cross section above. Dissolved lime drips into the form of great "icicles" called "stalactites," which hang from the roof, with corresponding "stalagmites" on the floor of the cave

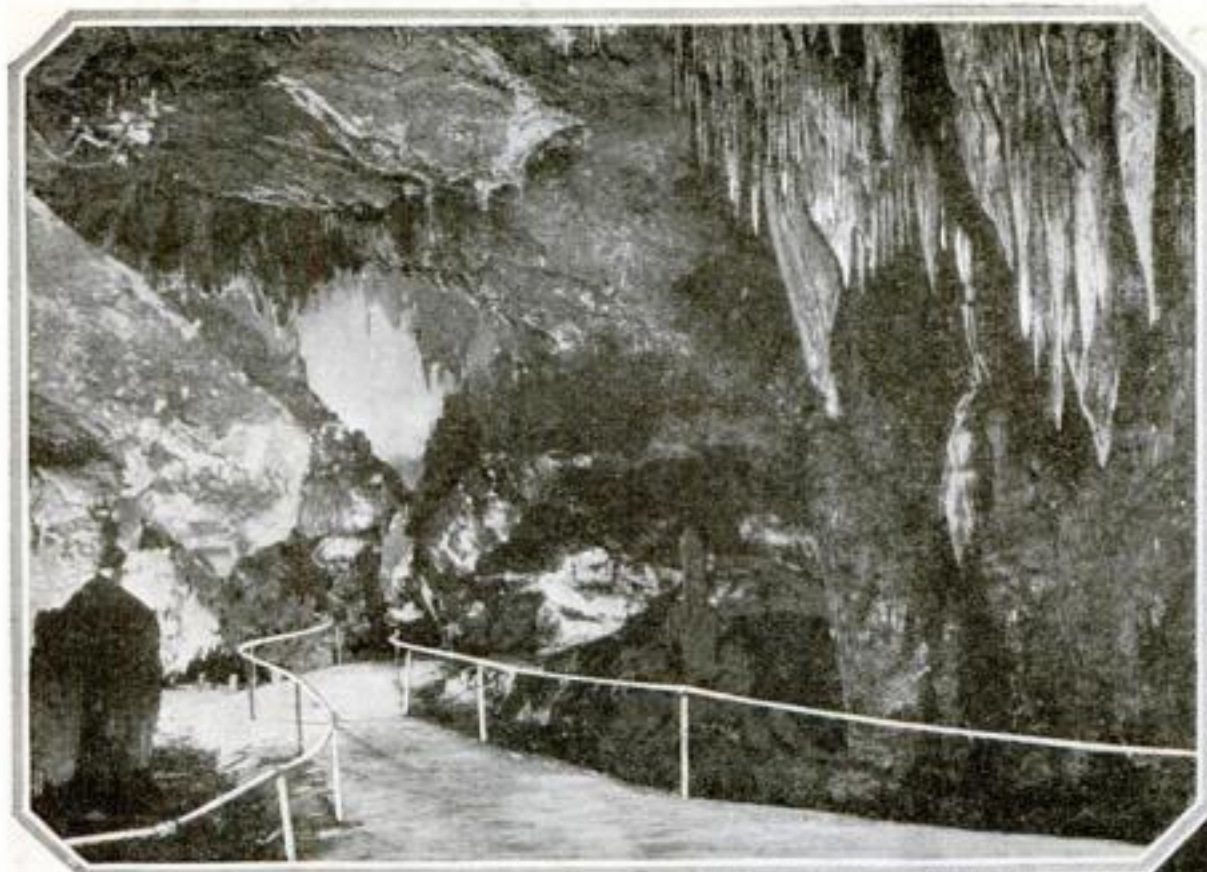

An Underground "Ballroom"

THE entrance to the magnificent "ballroom" of the Luray Caverns is shown at left. With smooth paths, guard rails, and electric lights, caves such as this have been made as safe as hotels for tourists.

Photos © J. D. Sickler

Through the underground passages eaten out by the acid, water runs from the surface at times. The Shenandoah Valley is full of potholes that, lacking surface drainage, quickly empty rain water into underground water courses until cracks in the rock beneath them become filled with earth or stalactitic material. At one time a hole that had held water for many years suddenly opened as if some one had pulled out the stopper, and a small lake disappeared with a mighty roar into the bowels of the earth.

Nature's Drainage System Makes Caves

A cave system in limestone is really a drainage system such as formed by rivulets, creeks, and rivers. If a cave is dry, it means that the stream that formed it has lowered its bed by erosion and that the cave waters have found a lower level. In many caves, several levels—deserted creek beds—can be found. In most limestone caves water can be found, though hidden many feet below the level of the cave in an underground stream that flows to the sea. And, if no water is found in the bottom of a cave, there is a mud sump with marks showing where the water has run out.

The newly commercialized Endless Caverns and the Shenandoah caverns, three miles south of Mount Jackson, have become tremendously popular. More than 10,000 persons paid admission fees during the first 10 weeks after the Shenandoah caverns were made accessible to tourists. The perfect highway from the Valley Pike to the entrance of the Endless Caverns has drawn many more thousands, and smaller caves in the vicinity have reaped some of the profits.

\$250,000 Spent to Exploit Caves

Improvements in the Endless Caverns, representing an investment of more than a quarter of a million dollars, include a great stone restaurant, a stone ledge over the entrance, an adjoining farm that supplies the restaurant, an observation tower and searchlight on a near-by hill, a power plant that floods the dark underground passages with radiance, and a proposed stone hotel.

From the moment you follow the guide into a narrow passage that appears at first to be a blind alley, but turns out to be an entrance, you are dazzled by the glittering splendor of delicate and massive formations, a riot of exquisite coloring.

(Continued on page 62)



THIS photograph of the spacious "Saracen's Tent" in the Luray Caverns, gives an idea of the massive underground formations on which Nature has worked for centuries. Note size of

gorgeous stalactites hanging from the dome and of the huge pillar at the left, as compared with the two men in the photograph. The cave's natural beauty is enhanced by ingenious lighting


Trick Forces Tide to Lift Steamer from Rocks

WITH the aid of a 20-foot tide and an ingeniously constructed cribbing, engineers recently succeeded in floating the steamer "Empress" from the rocks in the Bay of Fundy, after every effort to pull the vessel into deep water with tugs had failed.

The Canadian Pacific steamer was on her regular run in the bay when she poked her nose high on a ledge of rock in St. John harbor in such a way that a point of the ledge became firmly hooked into plates on the ship's bottom.

When tugs attempted to pull the steamer away, they served merely to fasten the rocky hook more firmly into the ship.


It was decided that the only way to float the steamer was to raise her entirely off the

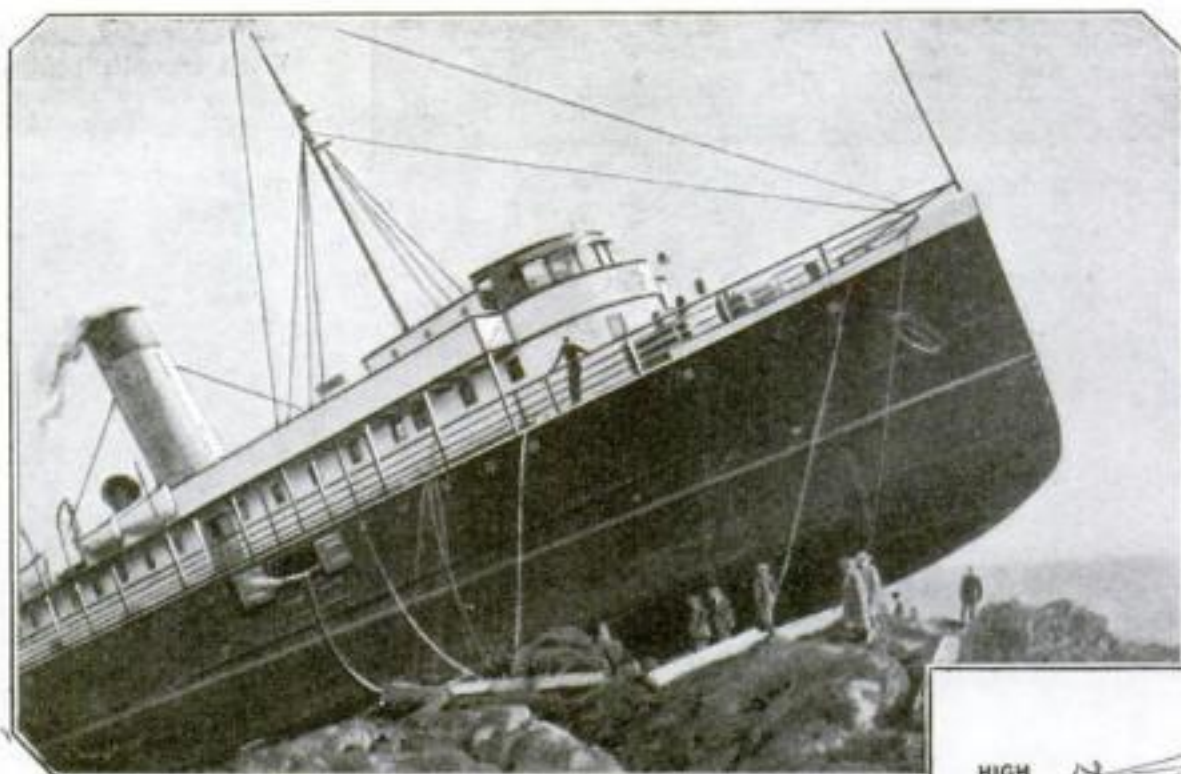

Steamer "Empress" on the rocks, showing workmen constructing cribwork that lifted her free of the ledge, as in diagram

ledge. Therefore, at low tide, a portion of the rock was blasted from beneath the bow, and there a cribbing was constructed so

that as the stern rose with the rising tide, the weight of the ship was thrown on the cribbing. Finally, at high tide, the hull was lifted clear of the ledge, and the bow rested on the cribbing. Since the top of the crib had been thoroughly greased, it was an easy matter to pull the boat into deep water. The few plates bent by the collision were held in place by a concrete backing and the ship was towed to drydock at Halifax.

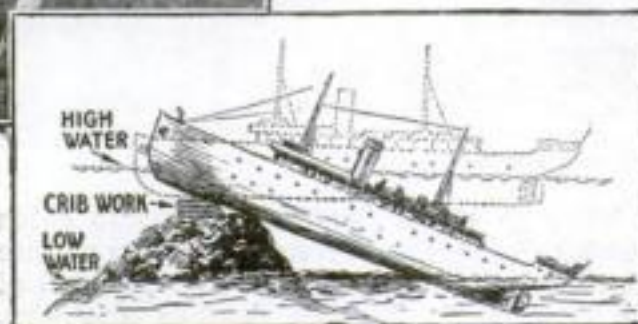

Caverns Open to Tourists

(Continued from page 61)

Perhaps most impressive of all sights is the Diamond Lake in the Endless Caverns. You reach a point in the caverns where you see a cleft about two feet high and about three feet from the floor. Suddenly the lights go out and the entire cavern is in darkness.

"Face the end of the passage, please," orders the guide. You comply, wondering what is coming. In a moment there is a "click," followed by a flood of ruby-colored light that turns Diamond Lake into blood red water, reflecting countless rubies in the banks and ceiling over the tiny crescent shaped lake.

Fantastic Forms and Colors

Once again the cavern is in darkness; then soft yellow lights transform the lake cavern into a jeweled castle of yellow diamonds. Then green lights, creating an emerald lake that excites gasps from the spectators who remember Diamond Lake as one of Nature's most beautiful scenic spots.

There are other scenes in the Endless Caverns just as fantastic—the Palace of Fairies, where a forest of crystal formations suggests all manner of elfin, fairy, and goblin-like figures, enhanced by skillfully placed electric lights. There are formations of pure milky white, delicately colored stalactites and stalagmites of tints and shades ranging from reddish brown (made by iron compounds) to soft gray blue (caused by the presence of manganese). There is the Hall of Giants, where tremendous stalactites and stalagmites lie prostrate, one of them weighing 400 tons and believed to have fallen nearly 4000 years ago.

Perhaps the most awe inspiring of all is a milk white specter standing guard over what is known as "Pluto's Chasm," a rift 40 feet deep, and 500 feet long. Dainty shawls of translucent calcite, falling in graceful folds ornamented with a narrow band of reddish brown; cascades of glistening white, terraces, pools of crystal clear

water, countless formations of white and colored calcite formations, combine to make the chasm one of the most beautiful pieces of underground architecture in the world.

There are endless wonders in caves. To some persons the silence is ghastly; to others it is soothing. It is broken only by the dripping of water or the rolling of a pebble. Bats hang in clusters from the wall; sometimes you run across nests of wild animals, often containing bones; seeds brought in by birds or beasts send up shoots of pallid white; colorless translucent cave crickets hop about with proverbial liveliness; ghostly eyeless fishes and crabs swim about in the underground streams.

In historical interest and in size Mammoth Cave, Ky., surpasses all known caverns. It was made a show place as early as 1816, passing into various hands and finally to Dr. John Croghan, who bought it and 2000 acres of surrounding land for \$10,000. O. Josh Wilson, oldest guide there, has shown the caves to no less than 36,000 people, receiving fees estimated at \$108,000. Saltpeter miners, tuberculosis colonists, mushroom farmers, Indians, theatrical stars, singers, and even presidents, have visited the place even though in the early days they were forced to go on mule-back.

Other famous caverns are Wyandotte Cave in Indiana; Penn's Cave, near Centerhall, Pa.; Washington's Masonic Cave in northeastern West Virginia, where the first president is reputed to have held Masonic meetings; the caves of the Winds at Niagara Falls and in Colorado, and the caves of Arizona, New Mexico, and Ohio. All of these fall under the classification of exploited caves from which a business mounting into millions of dollars is derived.


But the unexploited caves are the ones that are attracting the interest of the Cave Men's Club of America.

At every opportunity members of the club seek out little known caves, enter by ladder or rope, and explore the unknown depths, risking their lives and getting from the adventure thrills they feel are great enough to justify their trouble.

Electric Iron Can Be Set at Any Temperature

USING a new "even heat" electric iron, the housewife can set her iron for low, intermediate, or high heat; thus regulating the temperature to give the best results on the particular material being ironed.

When a control button is set for low heat, a thermostat consisting of a laminated

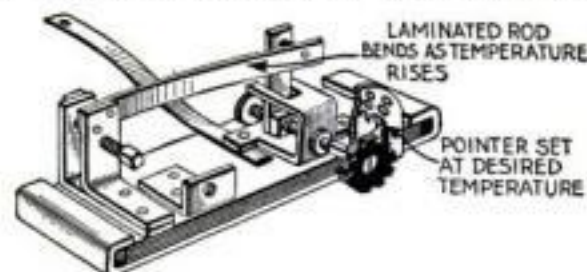

When heat passes desired temperature, bending metal rod breaks the circuit

metal rod is so bent that any temperature above 150 degrees will cause a further bending of the rod and will break the circuit until the excess heat has been consumed and the rod contracts to its original position, when the current is again permitted to flow.

When set for high heat, the thermostat acts at a temperature of 400 degrees. Any



Heat of this electric iron is controlled by pressure on a button

intermediate setting places a definite pressure on the thermostat and causes the current to be shut off at whatever temperature is demanded by the work in hand.

Will Women Athletes Win Men's Crowns?

Former Woman Swimming Champion Says Masculine Title Holders Must Look to Their Laurels—Girl First to Smash Record

By Ethelda Bleibtrey

Former Amateur Swimming Champion of the World

FOR the first time in history a woman athlete, in competition with a man, has broken a world's athletic record.

When Sybil Bauer, an 18-year-old girl student at Northwestern University and member of the Illinois Athletic Club, recently swam 440 yards backstroke in six minutes, 24 4/5 seconds, she not only smashed the world's record for that event, held by her own teammate, Harold Krueger, but she issued a challenge in behalf of all womankind against the supremacy of man in the world of sports.

An Era of Women Champions

In itself, this college girl's feat might be of only passing importance were it not for the fact that hundreds of women are crowding to the front in sports, creeping closer year by year to the championship laurels that until now have been worn exclusively by men in all lines of athletics. I predict that Miss Bauer's swimming record definitely marks the beginning of an era when the world's sport crowns will fall, one by one, before the conquests of the "weaker sex," and that eventually women will wear as many of these prizes as men.

I believe this so thoroughly that I am now coaching a class of super-swimmers at the Ambassador Hotel in Atlantic City directly preparatory to trials for some of these world records.

The tremendous advance of women in athletics during the past twenty years, and especially in the past five years, has been a thrilling drama to me. Let us analyze some of the records in which women approach the marks set by men:



Ethelda Bleibtrey—Former amateur woman swimming champion of the world and now coach of a class of women swimmers, some of whom, she predicts, will capture world's records now held by men

of one minute and soon they will be down to the time of 56 seconds, the record set by men. Other backstroke marks, besides that for the 440 yards, will be among the first to fall.

In golf, women are slowly but surely driving to the front. Just how near they are to the excellence of men in this vastly popular game may be ascertained from the fact that the longest drive by a man is 341 yards, the record set by Abe Mitchell, the British golfer. Yet Glenna Collett, an 18-year-old girl champion, who has not yet reached her full powers, has actually driven a golf ball 313 yards!

Tennis Marvels Vie with Men

In tennis, one of the first games women took up, man's supremacy is being threatened. I am quite sure that Molla Mallory or Suzanne Lenglen could defeat all but two or three of our best men players. Mademoiselle Lenglen's drives, according to Vincent Richards, the young tennis marvel who has played against her, are as hot and as difficult to handle as any man's. Experts predict that Miss Helen Wills, 15-year-old star, will eclipse both Mrs. Mallory and Mademoiselle Lenglen.

Englishwomen have become experts in hockey, one of the roughest of games. Only a short time ago the Sheffield women's soccer team from England played Philadelphia Field Club Men's team at Philadelphia, Pa., and the latter, playing at full speed, were barely able to scrape through by a margin of one point. American girls also are proficient in hockey, and in ice racing. Miss

Gertrude Mohler attains speed very close to that of men skaters.

Women are steadily gaining on men in basketball, offsetting man's natural superior weight by their greater natural agility and team work. Even in baseball the Kansas City Bloomer Girls' team recently played one of the best semi-professional men's teams of New Jersey and emerged victorious.

When I first began to swim, a mark of one minute and seventeen seconds was a splendid one for women swimmers competing in the 100-yard event. They have gradually cut down that mark until they are approaching a time



The first woman in history to capture a world's athletic championship from a man—Sybil Bauer, 18-year-old college girl, setting a new record for the 440-yard backstroke swim



Flying tackles, line bucks, forward passes—all the grueling plays of the gridiron—are enjoyed by these girl football players at George Peabody College, Nashville, Tenn.




A golf champion at 18, Glenna Collett has driven a golf ball 313 yards, or only 28 yards less than the world's record drive by Abe Mitchell, famous British golfer


Records that Show Women Athletes Are Running Close Second to Men




Hundred-yard dash

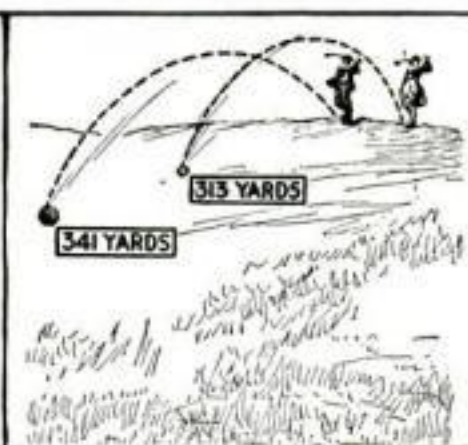

Driving golf ball

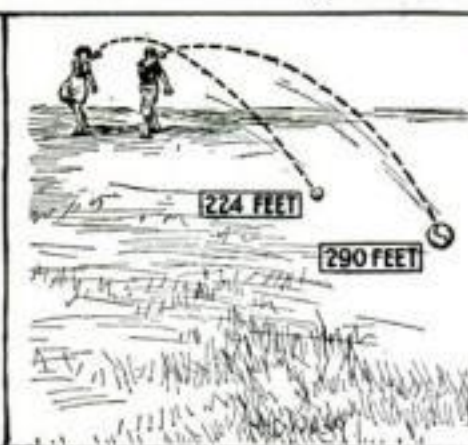

Throwing the baseball

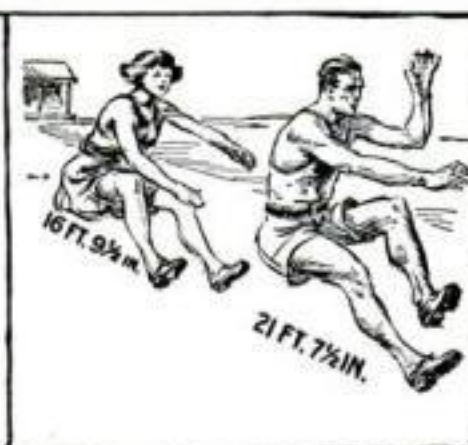

Running broad jump

And women are now throwing themselves into a supposedly exclusive sport for men. The football team of the George Peabody Teachers College of Nashville, Tenn., attracted considerable attention last season.

The first real track meet for women was held last summer in New York. Yet the marks set compare favorably with those of young men of the same age and development. School-girls can now run the 100-yard dash in 12 seconds or better, as compared with $10\frac{1}{5}$ seconds for boys of the same age; Miss Rhea Riedel threw a javelin 98 feet! Maude Rosenbaum threw a basketball 94 feet two inches; and Eleanor Churchill a baseball 224 feet four inches, as compared with a man's record of

Are You Getting the Right Kind of Exercise?

IMPORTANT new truths about exercise in relation to your particular job or profession—facts that you can use every day in the year to keep yourself fit—will be revealed for the first time in next month's issue of **POPULAR SCIENCE MONTHLY** by a national authority on the subject, Dr. C. Ward Crampton, aide to Secretary of War Weeks in his nation-wide campaign for better American manhood.

Doctor Crampton will tell you exactly what sort of exercise you need—whether you are a business executive, a clerk, a mechanic, or an outdoor worker—and why you need it. And he will give you some simple tests that will enable you to determine whether you are keeping your physical condition up to normal.

290 feet. Ellen Hayes hopped, skipped and jumped 33 feet six inches, and Maud Devore broad jumped 16 feet $9\frac{1}{2}$ inches, or only four feet 10 inches less than the world record set by man.

Just a few weeks ago, four girls of the

Valcour Club, without preliminary coaching, ran a 440-yard relay, each running 110 yards in $55\frac{3}{5}$ seconds, a really fast time for boys of their age.

Will women ever approach men in throwing weights and other feats of sheer strength? One girl, Margaret Mitchell, already has "put" a 12-pound shot 28 feet four inches, and is likely to shatter that mark soon. A high school boy of her age would do well to heave it 35 feet.

Sybil Bauer's swimming record, of course, will spur women on to accomplish greater athletic achievements. What she did, others can do, and in a few years I believe you will see many of the marks set by men falling before sturdy women athletes.


Pocket "Gun" Shoots Tobacco into Pipe

AMONG recent novelties for pipe smokers is a pocket "gun" holding eight tobacco cartridges. The case is equipped with a plunger that forces the tobacco from the cartridge and rams it into the pipe. When not in use, the plunger rests in the groove that separates the two layers of tobacco cartridges.




A plunger forces cartridge of tobacco into the pipe

"Feeler" Car Records Bridge Clearance

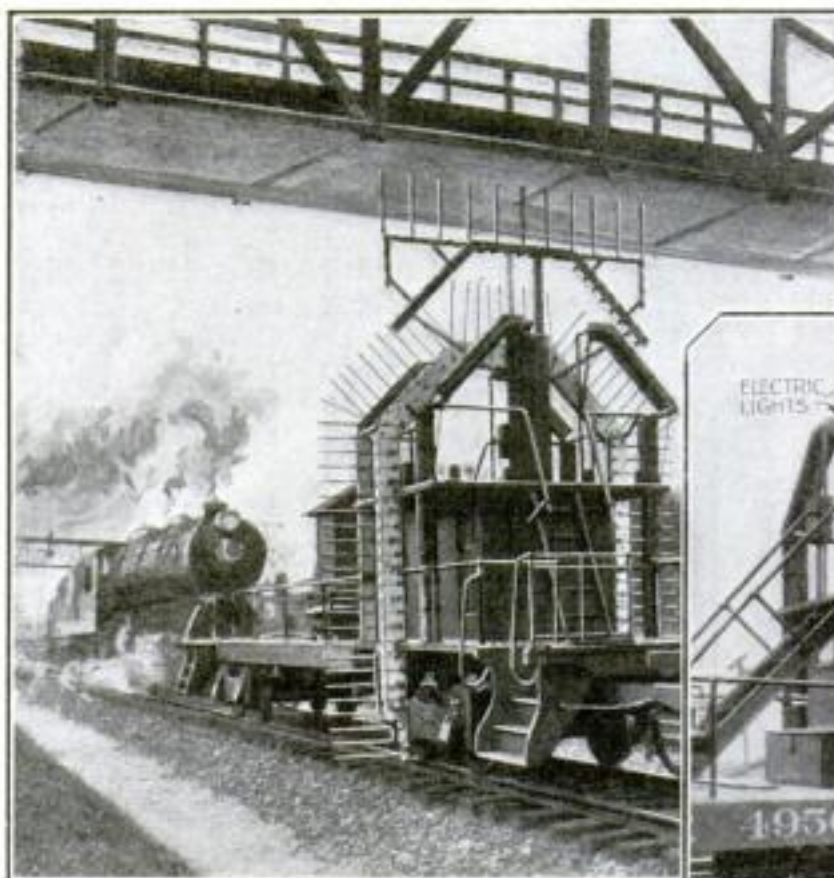

When "feelers" on this queer looking railroad car strike the sides or top of bridge or tunnel, they record clearance in feet. Another device measures curvature of rails

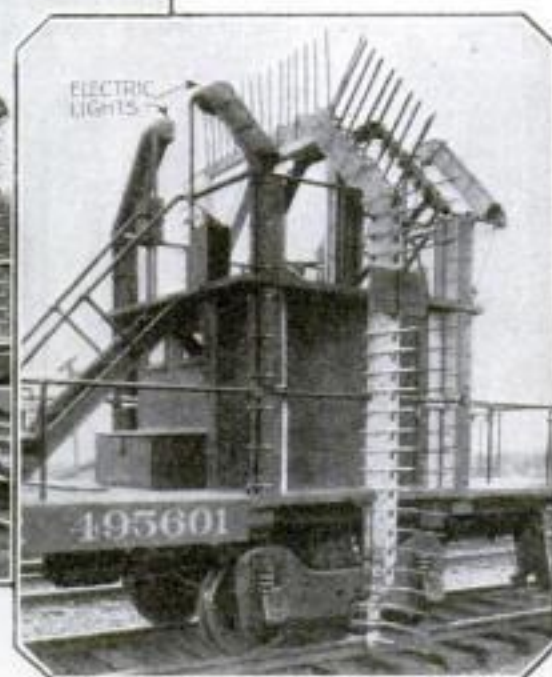

A SPECIALLY designed railway car, which not only measures accurately the clearances of bridges and of other objects along the line, but also records the curvature of rails and the height of one rail above the other where tracks are banked at curves, is being operated by the Pennsylvania Railroad.

The car makes its record while traveling at four miles an hour. It has two templets, one of which has attached to it a number of hinged extensions or feelers of steel, spaced six inches on centers. In passing a bridge, the feelers strike the sides and top

of the bridge and are deflected to the angle that permits clearance.

The amount of this deflection is recorded automatically. For higher bridges a second templet is raised by a jack screw and similar readings are taken.

The movement of a pendulum located in the center of the car, shows the height of one rail over another, while still another arrangement shows the curvature of the track.

Millions of Tons of Fuel Lie Unused in Peat Bogs

WITH his coalbin depleted of its last shovelful, W. T. Cox, state forester of Minnesota, went out into his back yard during the past winter and dug up enough peat to keep him in fuel. In so doing he set an example for thousands of other families in his state, who "mined" enough of the long overlooked substitute to tide them over the coal shortage.

In 65 of the 86 counties of Minnesota, according to Cox, there are more than 6,000,000 acres of peat lands. He says that nearly every farmer in the state could be independent of the coal dealer if he would only consume the substitute used so widely in Europe.

Billions of Tons Available

And Minnesota is not the only state in the Union thus neglecting its fuel resources, for the total deposits in the United States are said to contain 14,000,000,000 tons—enough to supply Europe, at its present rate of consumption of 20,000,000 tons a year, for 700 years. A large part of this peat is well adapted to power production. Peat ashes also are useful in tanning leather and in making antiseptics, cement, and fertilizer.

Peat is a spongy substance, found in almost every bog or marsh. It represents one of the phases in the slow decay of vegetable matter through the ages. When plant remains fall upon drained soil, they are promptly attacked by bacteria and soon disappear. But when they fall into water, the acids formed retard the decay by destroying bacteria, and a large proportion of the carbon matter in the plant material is saved. In color, peat varies from light brown to black, and in



Why worry about a coal shortage when you can dig peat out of your yard and burn it in the furnace? Above is part of the winter fuel supply of W. T. Cox, Minnesota state forester. Blocks of peat that he spades from his yard, as shown at the right, are stacked in piles to dry for several weeks until needed for fuel.



consistency from that of bran mash to that of clay. Most coals were transformed from peat.

Some advance has been made in the recovery of commercial peat in other states than Minnesota. In the great Dismal Swamp, in Virginia, for example, peat deposits covering almost 1000 square miles to a depth of from 15 to 20 feet are being mined by two large corporations that were awake to its marketable value.

The harvesting of peat is still generally done with a hand spade with sides and back forming a mold. Blocks removed by this tool are placed in piles in the air,

and are turned time after time. When dry, they are ready for burning. In Europe a pressure method of drying peat in large quantities has recently been invented.

In its natural state peat has not the heat capacity of coal, but when pulverized to a fine flour and blown under a boiler, it is an excellent fuel for commercial work. The natural peat blocks, however, can be used effectively in a small furnace, stove, or fireplace.

Print Radio Newspaper "On the Run"

THE feat of editing and printing 10,000 copies of the Yankton (S. Dak.) *Press and Dakotan* in 23 editions in 23 towns in the course of a 300-mile automobile trip was recently accomplished with the aid of radio.

From a radio car fitted with complete receiving apparatus, up-to-the-minute state news and Associated Press

despatches sent by Yankton College wireless station, were received. This news, together with local news, was edited, set up, and run on a multi-graph press in a press car. Type was set while a stop was being made and the next edition was run off while the cars were on their way to the next town.



Here is the complete automobile newspaper plant. At left is radio car showing operator receiving news despatches, and at right is automobile multigraph plant




A Desk "Office Boy"

A SIMPLE office desk device that does the work of office boy or secretary in informing visitors whether the business executive is absent, where he is, and when he may be expected to return, consists of a stand that supports a drum in which is a rotating cylinder. Upon this cylinder are 17 readings that cover periods of time in the ordinary business day. The departing executive need only turn a knob until the proper reading appears.

When not used for this purpose, it forms a convenient paper holder and tray for pens and paper fasteners.

THE Editor will be glad to supply, wherever possible, names and addresses of manufacturers of devices mentioned in this issue.

Postal Inventor Devises Miles of Belt Conveyors to

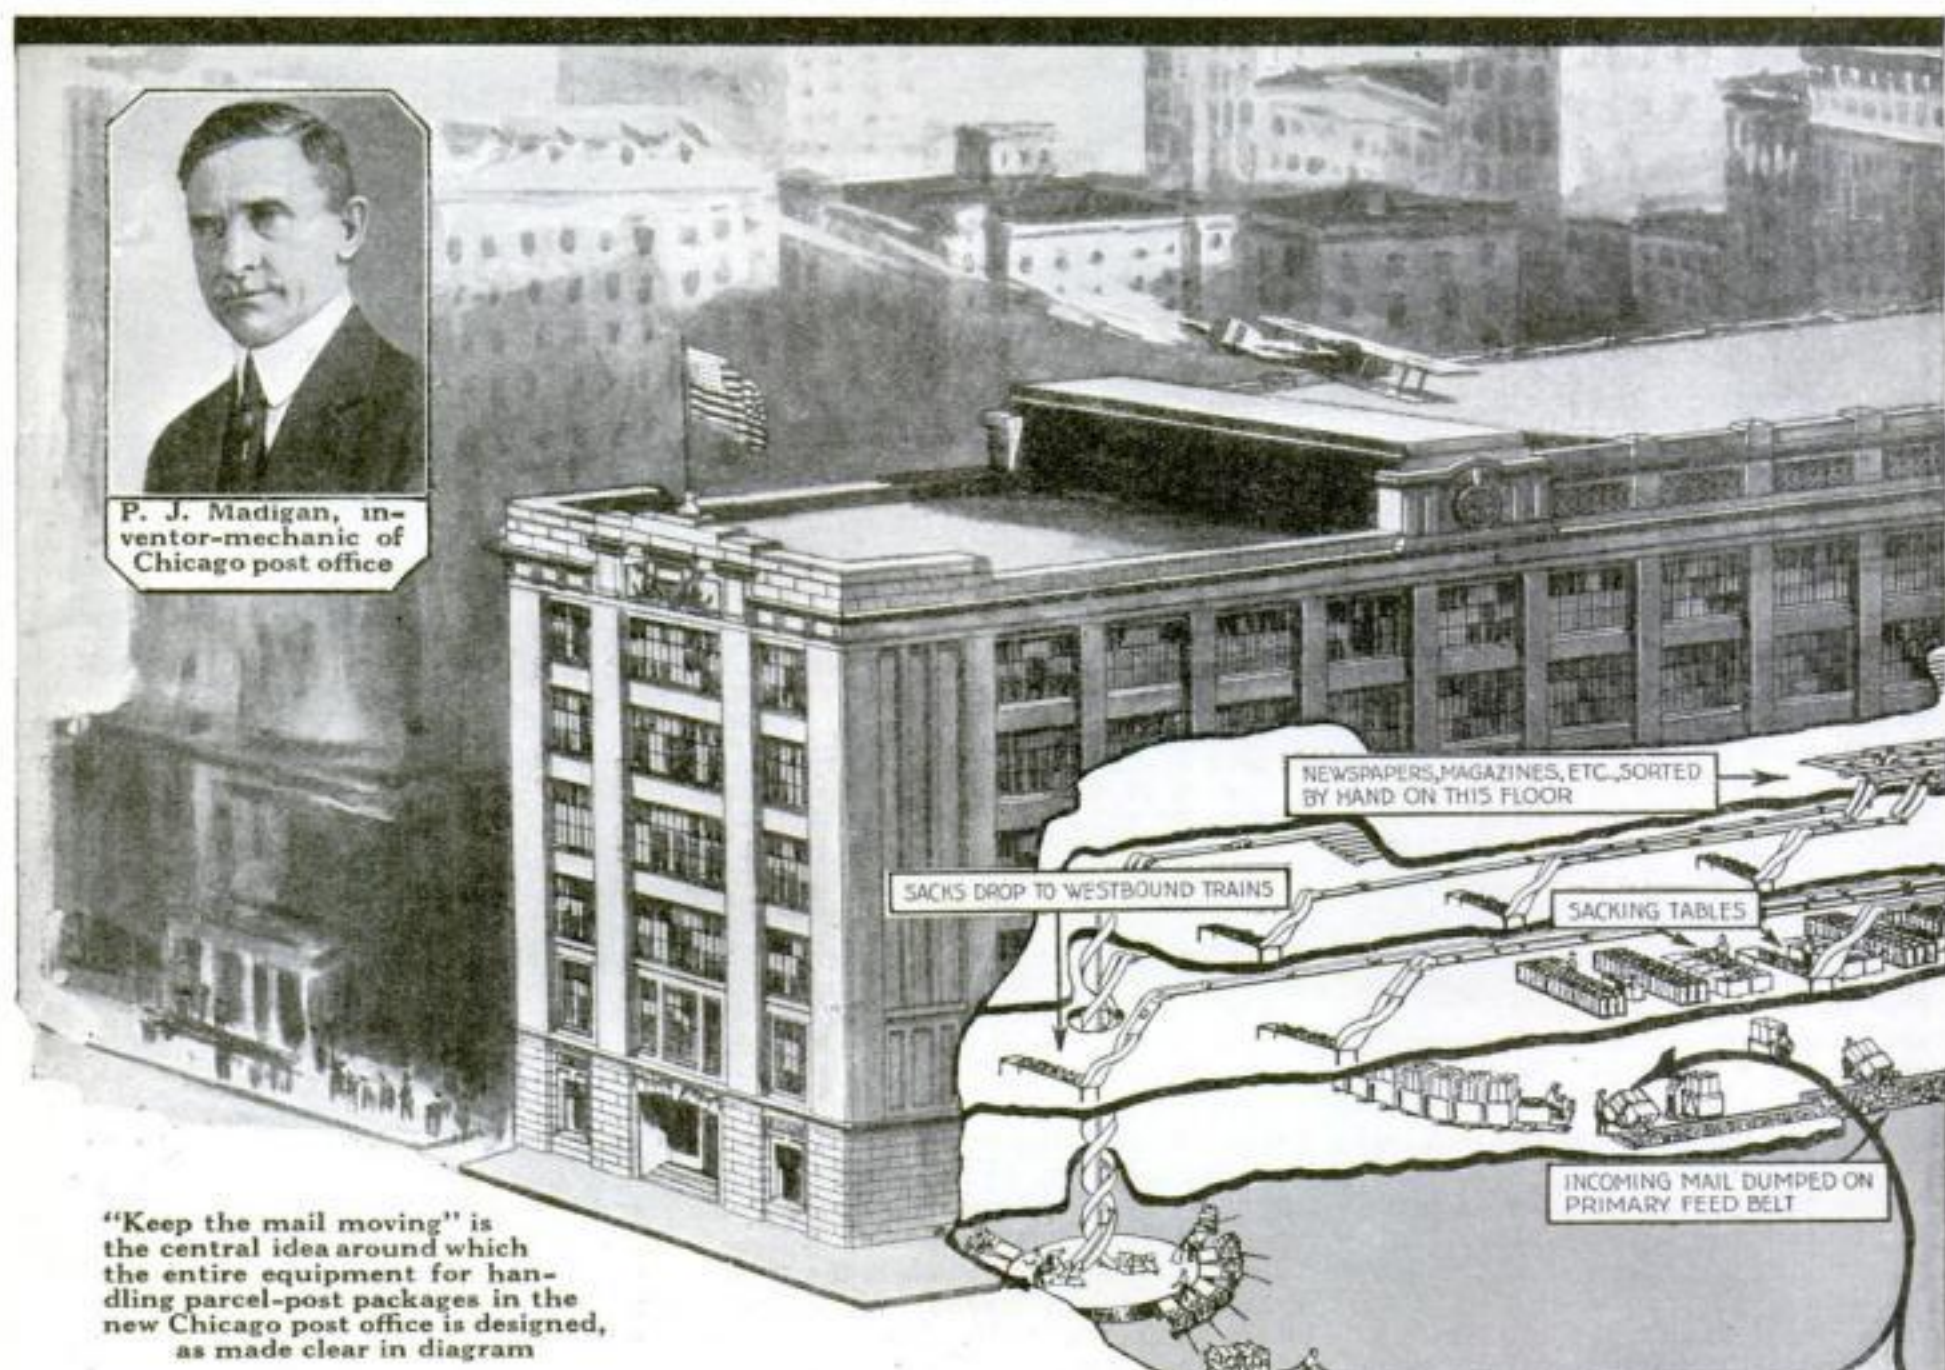

P. J. Madigan, inventor-mechanic of Chicago post office

"Keep the mail moving" is the central idea around which the entire equipment for handling parcel-post packages in the new Chicago post office is designed, as made clear in diagram

CHICAGO has practically completed the most marvelous post office in the world—a post office built for speed, where dozens of ingenious mechanical inventions will keep parcels on the move every minute of the day, from the time they enter the building until they are loaded on trains for their destinations.


Machines that Spell Speed

More than four miles of belt conveyors that will handle 10,000 sacks of parcel post every hour; ingenious mobile hand trucks that can be loaded with mail at business houses, hauled to the post office on motor trucks, coupled into miniature freight trains and dumped with lightning speed; amazing sorting belts, chutes, and overhead carrier systems—these are just a few of the working parts that will make up one immense post office unit of half a million square feet capacity. Running with machine-like precision, making use of every square inch of its capacity, substituting machinery for sorting and tossing by hand, Uncle Sam's new mail clearing house in Chicago is expected to establish a world's speed record of more than 800 tons of parcel post a day!

And not the least of the marvels of this gigantic postal machine is the fact that it was conceived and designed, almost in its entirety, in the mind of a single man, P. J. Madigan, of the Chicago postal service—a man of unusual mechanical skill, whose chosen work has been the

improvement of methods of handling mails, who tinkered with old half efficient machines, stuck to his job, and finally won distinction and success. Nearly every inch of the Chicago post office is the product of his study and experiment, as are a score of new machines.

When Madigan joined the Chicago postal service in 1894, nearly all the work was performed by hand. Cancelling machines were the only machines in general use. Since then, gearless cancelling machines, improved carriers for pneumatic tube systems, belt conveyor facing tables, an overhead system for handling primary mail, and a score of other time and labor saving improvements have been added; and a large proportion of

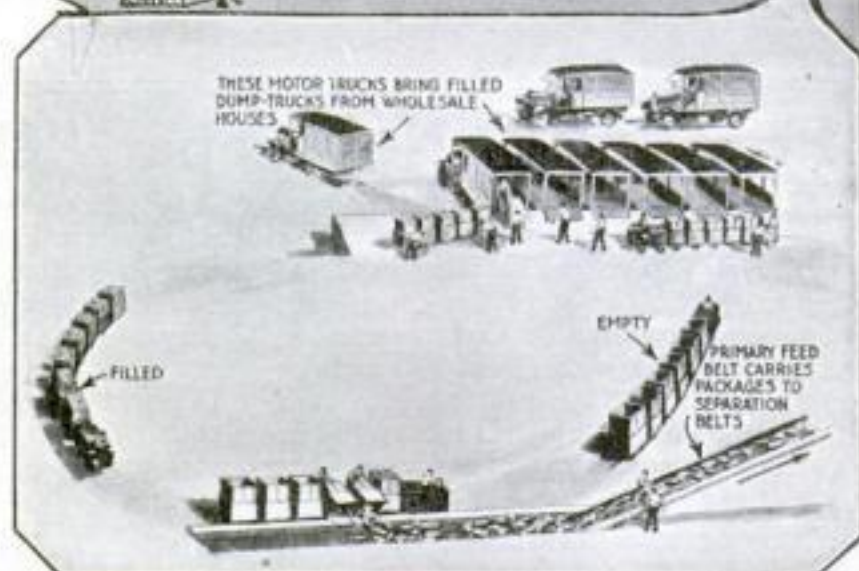

Specially designed container trucks on wheels, used for mail receptacles at Chicago business houses, are picked up by motor trucks, unloaded at the post office, hitched together in a train, and drawn by tractor to a feed belt, where they unload their mail without stopping

them have originated in Madigan's brain.

His inventions were installed first in the Quincy Street station, Chicago, where he was in charge. There they proved so successful that they were adopted on a larger scale in the new post office.

Every unit for handling parcel post was designed to keep parcels on the move. And in accomplishing this, the simple little hand truck container already mentioned, is perhaps the most effective of all. Mounted on casters and equipped with a tilting device that permits the top of the truck to swing forward toward


Why Some of Your Letters Go Astray

STATISTICS gathered by the Chicago post office department show that last year one out of every 150 packages received went astray because of incorrect address.

Of 2,266,243,054 pieces of mail, statistics show that: 6,788,000 were returned to the sender; 1,021,300 were corrected and forwarded; 4,370,500 were held for postage; 97,800 bore no address of any kind; and 2,905,000 had to be disposed of as waste.

This made a total of 15,182,600 pieces of mail incompletely or wrongly addressed or wrapped.

Keep the Mail Moving in New Chicago Post Office

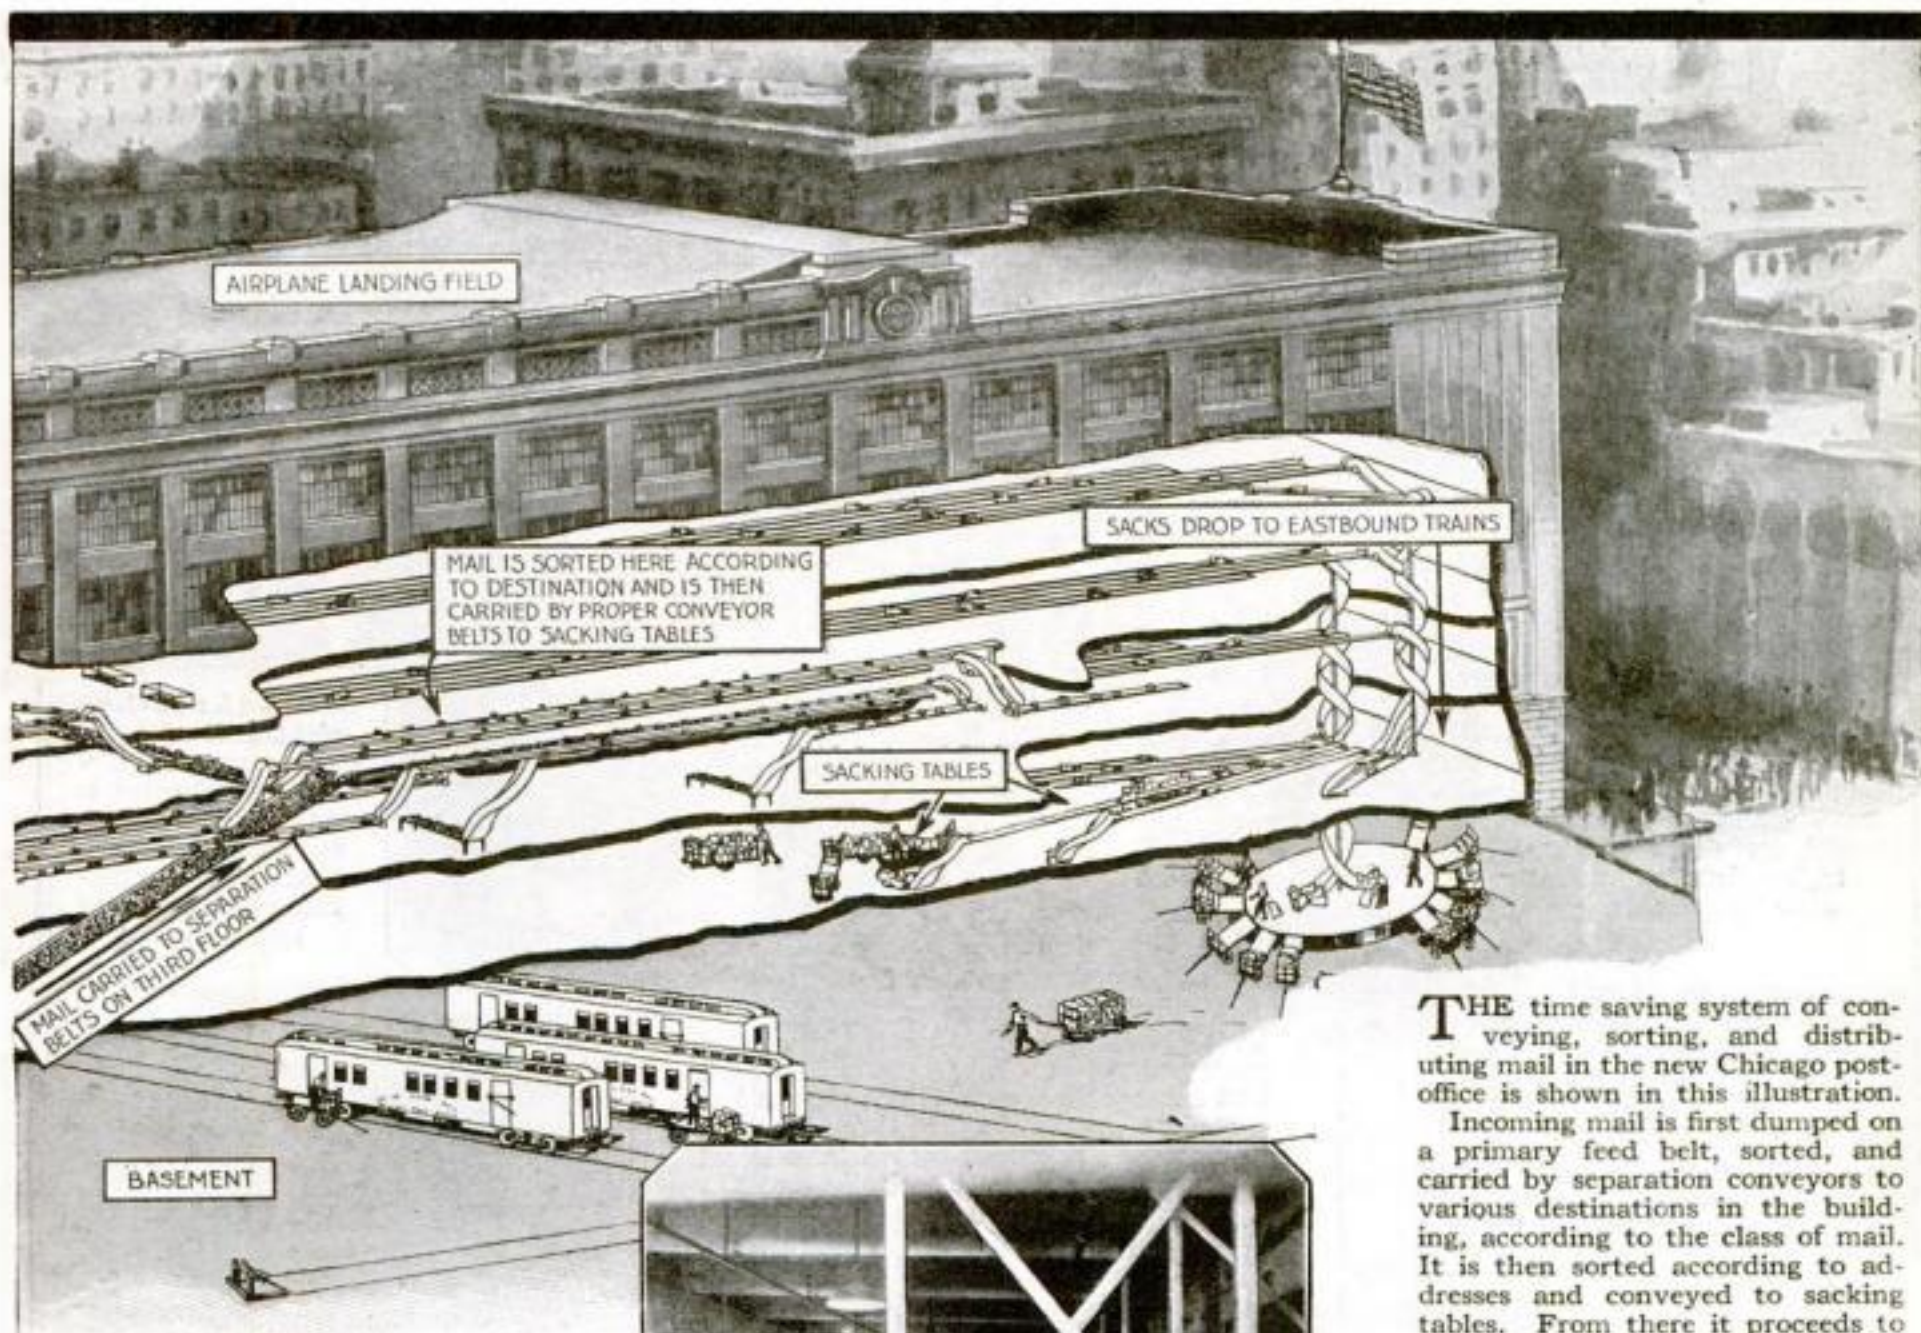

THE time saving system of conveying, sorting, and distributing mail in the new Chicago post-office is shown in this illustration.

Incoming mail is first dumped on a primary feed belt, sorted, and carried by separation conveyors to various destinations in the building, according to the class of mail. It is then sorted according to addresses and conveyed to sacking tables. From there it proceeds to chutes, dropping to outgoing trains

the operator and the bottom to open, this truck entirely eliminates the time-consuming sacking of parcels.

Nearly 80 per cent of loose packages received at the post office comes from business houses. By the new system seven or eight loaded truck-containers can be picked up by one motor truck and driven to the post office. There they are rolled off the truck and eight or ten of them are coupled together, forming a train. A baby tractor then comes along, hooks onto the miniature train, and pulls it past a trough into which the



arrives, unloads, and reloads with empty containers in just seven minutes.

Once on the feed belt, the parcels travel to "separation units," or distribution points, on the third floor, where they are sorted. Belts moving from these separation units carry the parcels to their various destinations, all uncanceled mail being carried back to the first floor, where it is cancelled and delivered by another belt to the feed belt on the first floor.

All separation belts on the third floor, except that which handles uncanceled mail, deliver to spiral chutes leading to the second floor, where parcels are sacked and dropped through openings in the floor to ceiling belts that deliver through chutes to the train level. During the process of sorting, 40 men can stand at the terminal of each feed belt.

Mail Congestion Is Prevented

The saving of time effected by Madigan's overhead conveyor system is shown by the fact that under the old method letters posted in the early afternoon and dumped on the facing table might be buried by a later batch of mail dumped on top of them before they could reach the cancelling machine. The overhead system of handling completely eliminates such delays.

An idea of the expected capacity of the new post office may be gained from the fact that its equipment is expected to double the speed record of the equipment installed by Madigan in the Quincy Street station, which last year handled 422 tons of parcel post in one day.



Forty men stand at the terminal of each feed belt and sort mail in the Chicago post office, as shown in upper photograph. Sacking at the bottom of the delivery chutes is made easier by the racks shown in lower view



packages are dumped from the trucks by a special device.

Along the trough a feed belt moves in the opposite direction to that taken by the train, making it possible to unload moving containers without clogging the conveyor or stopping the train. As soon as the containers have been emptied, they are loaded back on motor trucks and returned to business houses. By this system one motor truck


Three-in-One Washtub—New Household Inventions



Tying this new mop head over a kitchen broom provides a mop for floor or wall dusting, and is very useful for dusting high moldings

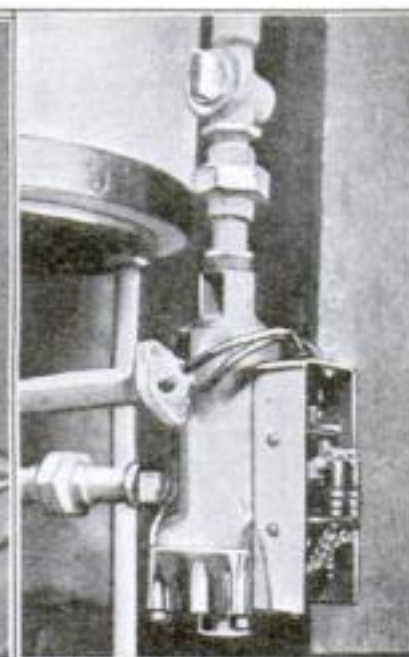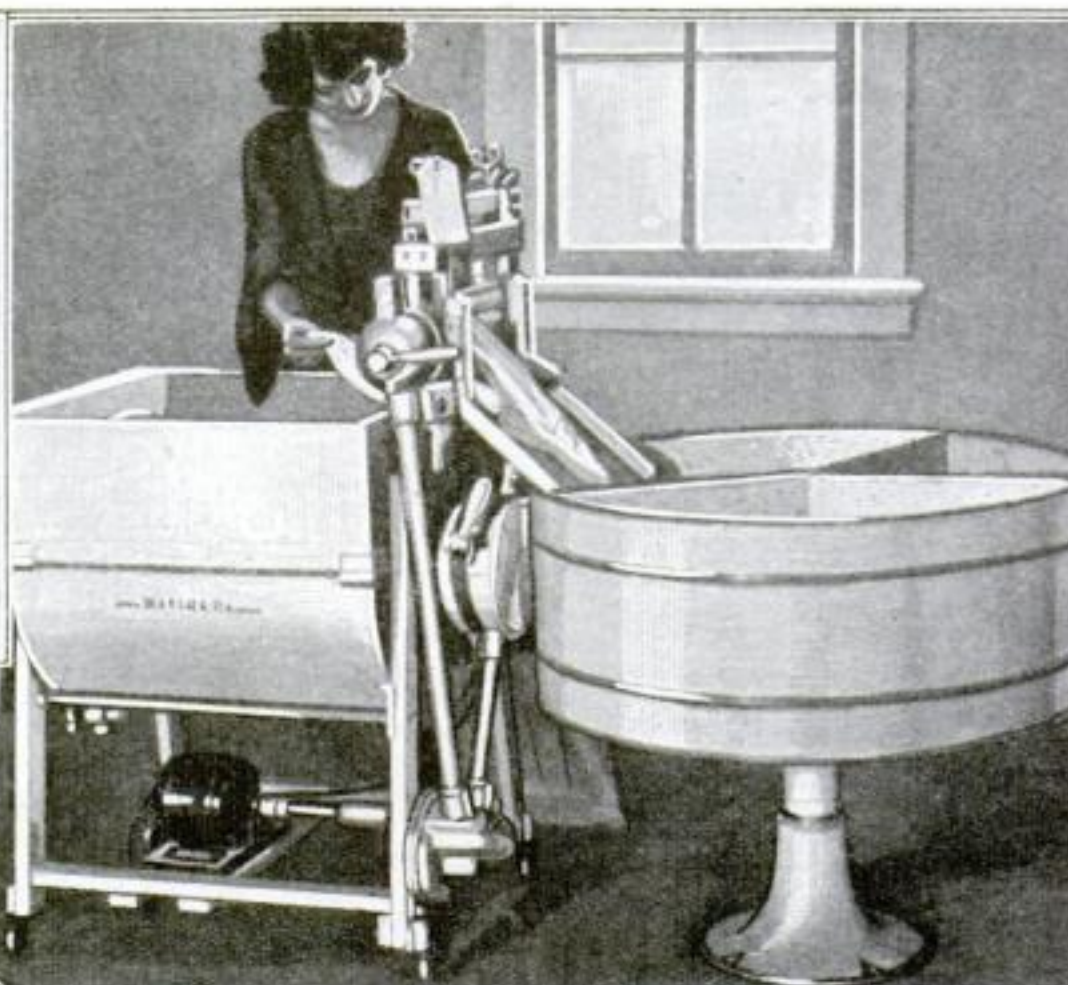


This three-by-eight-inch detachable automatic electric tank heater is equipped with a thermostatic switch that keeps temperature constant and saves current

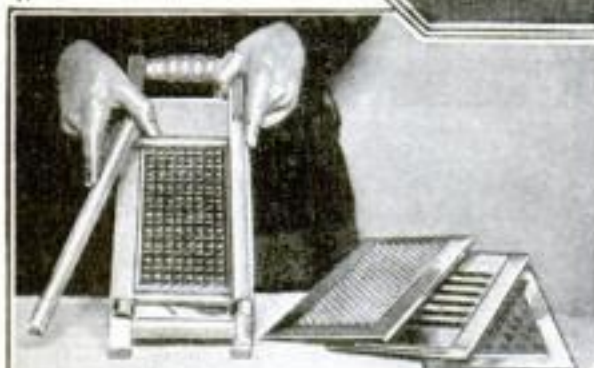


Every kind of grater comes with this adjustable frame, one side of which slips out to insert new grater

Slipping rugs and upturned edges are prevented by the anti-skid catch, at the right, which buttons the rug to the floor

This revolving washtub has three compartments, one for hot water, one for cold, and another for starch. Each section has a stopper and waste hole through which liquids are discharged into a funnel and hose leading to sink. Especially useful in conjunction with an electric washer

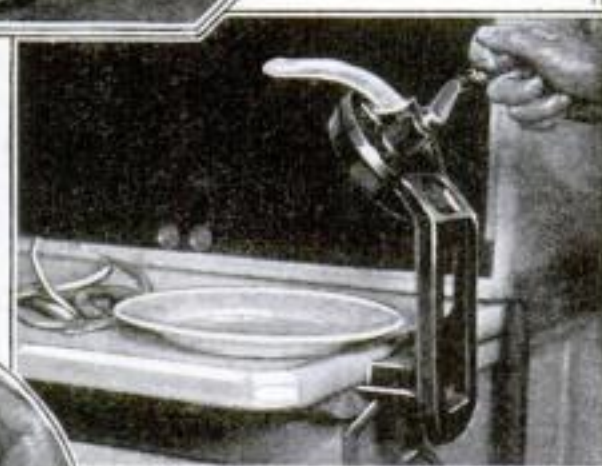

Beans are stripped of their strings by the turning of a crank on this mechanical bean stringer

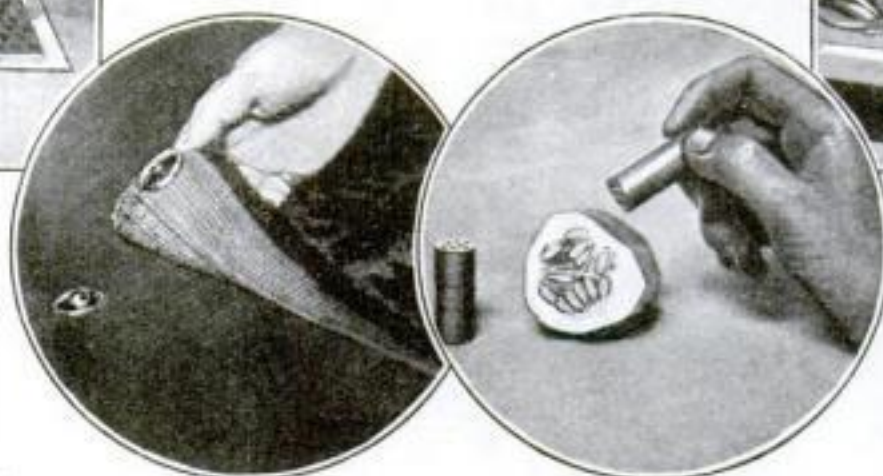

Small and inexpensive salt and pepper shakers made of paper (at left) solve a lunch problem for picnickers

Cheaper Print Paper Made from Weedlike Water Plants

THROUGH the invention of a process for the production of cellulose in commercial quantities from reeds, rushes, and other weedlike water plants that clog lakes, rivers and swamps, German scientists claim to have solved the print paper problem, providing a comparatively cheap substitute for the world's diminishing supply of wood pulp.

The most common plants used in making the cellulose from which paper is manufactured are reeds, rushes, flax stems, savannah grass, sugar cane, jute, and bamboo. It is said that almost any kind of grain




A mower mounted on a small flat boat cuts and harvests reeds and rushes from streams for use in manufacturing print paper

stems can be used also. New crops are available at all seasons of the year in various parts of the world.

The actual manufacture of the paper, according to reports, requires only two hours and is far cheaper than the wood pulp process. In fact, it is claimed that the price of the new paper will be 60 per cent less than the present price of pulpwood paper.

Cardboard also is produced by the new process. Indeed, despatches from Berlin say that already more than 50,000 inner soles for shoes have been manufactured from reeds and rushes.


Sky Writing to Tell New Facts about Airplanes

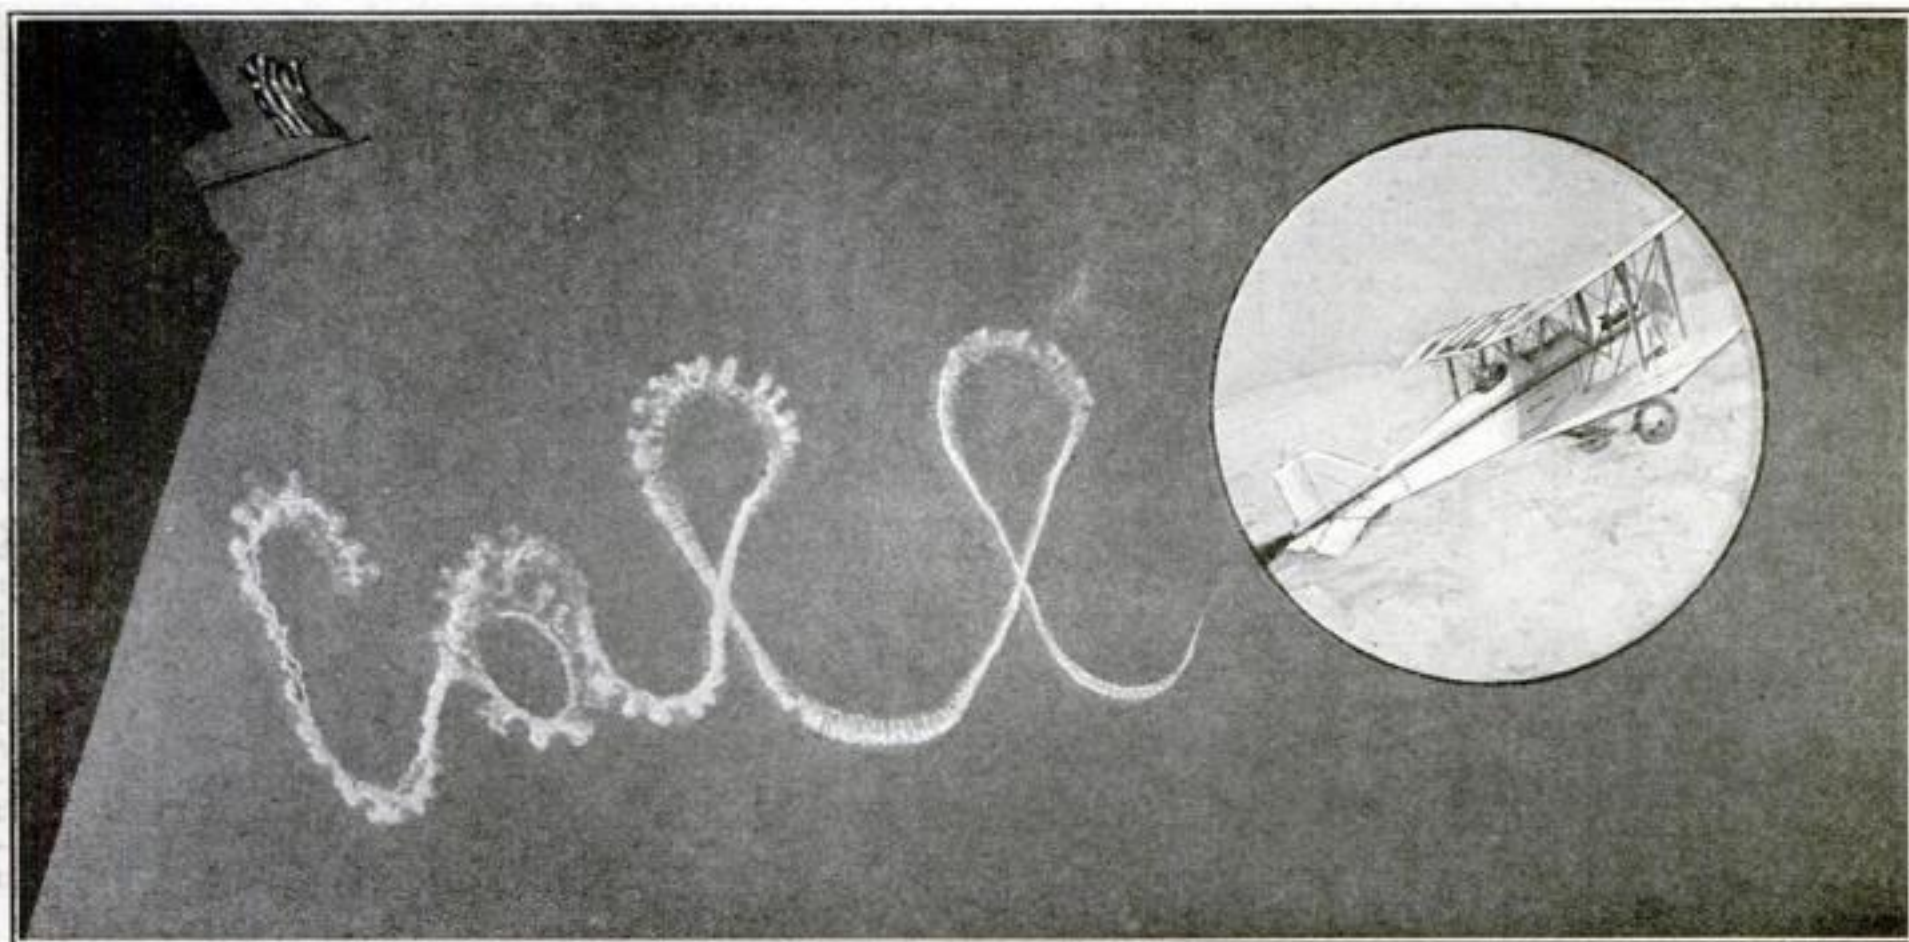

The word "Call" written across the sky above New York in smoke letters half a mile high by an airplane piloted by Capt. Cyril Turner

GIGANTIC words of smoke written across the sky by an airplane in letters half a mile high recently startled New York. The new method of advertising was invented and perfected by Capt. Jack Savage in England.

The words are written by maneuvering a plane carrying special smoke generators that discharge smoke produced at the rate of 1,000,000 cubic feet a second by chemicals that react on each other without producing combustion. When written at a height of 10,000 feet, the letters are visible over an area of 100

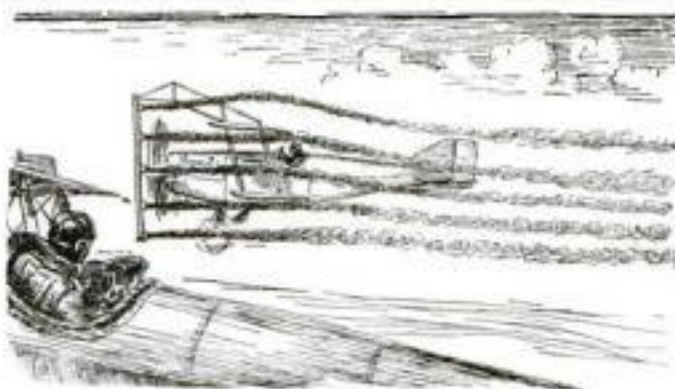

square miles for a period of from 20 minutes to an hour.

Sky writing, of course, has tremendous advantages in advertising because of the fact that an ad that may be seen by 1,000,000 people (if made above New York) may be produced for \$200.

At left—How the inventor of smoke writing proposes to use his invention to study new airplane designs by photographing ribbons of smoke

Captain Savage also sees in the scheme a method for studying air currents and the efficiency of planes. For this he proposes smoke generators located in the forward part of a plane. The downwash, slipstream, and eddies of air around the wings and projecting parts of a plane may be studied by photographing from another plane the ribbons of smoke enveloping the machine being tested.

Captain Savage is now investigating a plan for sky writing at night, using luminous smoke.

"Burbank of Strawberries" Pays \$50,000 for New Variety

WOULD you pay \$50,000 for the right to propagate a single strawberry?

That is what Frank E. Beatty, president of a Three Rivers, Mich., fruit growing concern, did recently. And yet, the buyer does not consider the price he paid too great. In fact, he is willing to risk his reputation on the statement that "the plant will revolutionize the strawberry industry."

Beatty, an expert in strawberry culture, has been unusually successful with four varieties of the plant. He claims that the \$50,000 strawberry plant, which will be known as the "Rockhill," in honor of its originator, Conrad Rockhill—

Produces more, larger, and better berries in early summer than any of the varieties now being grown.

Continues its heavy fruiting during fall months until snow flies.

Produces berries of firm texture, which will withstand long shipments.

Surpasses all other varieties, irrespective of climatic conditions, in productiveness and quality of berries.

Beatty further claims that the plants root deeply, grow luxuriant, tough leaves free from plant diseases, and possess surprising vitality that enables them to produce abundantly.



For the right to propagate the immense strawberry plant above, Frank Beatty, the "Burbank of Strawberries" (at right) paid \$50,000

According to the Department of Agriculture, the strawberry is the most valuable of all our small fruits, covering three fourths of the total fruit raising area in the United States. From a commercial standpoint, the chief value of the Beatty plant lies in the durability of the berries after they are picked; for the price of strawberries on the market is largely governed by the fact that so many spoil while being transported to market.

The garden berry is an American product, the result of a cross between the "pine" strawberry of Europe and the American wild strawberry, produced by Hovey, "father of the American strawberry."

Mechanical "White Wings" Guard City Health

ONE of the most pressing problems of modern municipal administration is keeping the streets of our great cities clean," says Commissioner A. R. Taylor, of the New York Street Cleaning Department.

"The tremendous increase of pedestrian and motor traffic makes it increasingly difficult to keep our highways free from germ-laden dust which not only spreads disease, but destroys our clothing, buildings, and merchandise. In New York City 1280 miles of paved area is cleaned daily, 4700 cubic yards of dirt collected, and 3,000,000 gallons of water used to flush the streets."

Street Vacuum Sweepers

The day of the familiar "white wing" is passing, for hand methods no longer can cope with the mountains of dirt and dust deposited by the increasing horde of autos. Other cities, both abroad and in this country, are meeting the problem with cleverly designed motor driven vacuum street sweepers.

These vacuum sweepers not only pick up dust and dirt from the street, spraying at the same time, but also have attachments for cleaning gutters, into which much of the refuse necessarily is swept.


One ingenious machine, the product of a Sandusky, Ohio, firm, operates like a vacuum carpet sweeper. A huge rotary broom in front throws the dust which has been sprayed into the field of vacuum suction. In St. Louis, within a period of 12 months, or 232 nights of sweeping, these

vacuum cleaners picked up 3,448,300 pounds of dirt and dust, cleaning an area of 54,843,152 square yards.

Another machine found to be extremely efficient is produced by a Springfield, Ohio, firm. It was designed to eliminate these features objectionable in earlier motor driven sweepers: excessively wide pick-up brooms, requiring excessively wide elevator belts and perishable wooden brushes.

Fine rotary disk steel brushes scrub

Replacing the familiar "White Wing," motor driven sweepers like those shown below are cleaning city streets of refuse and disease breeding dust

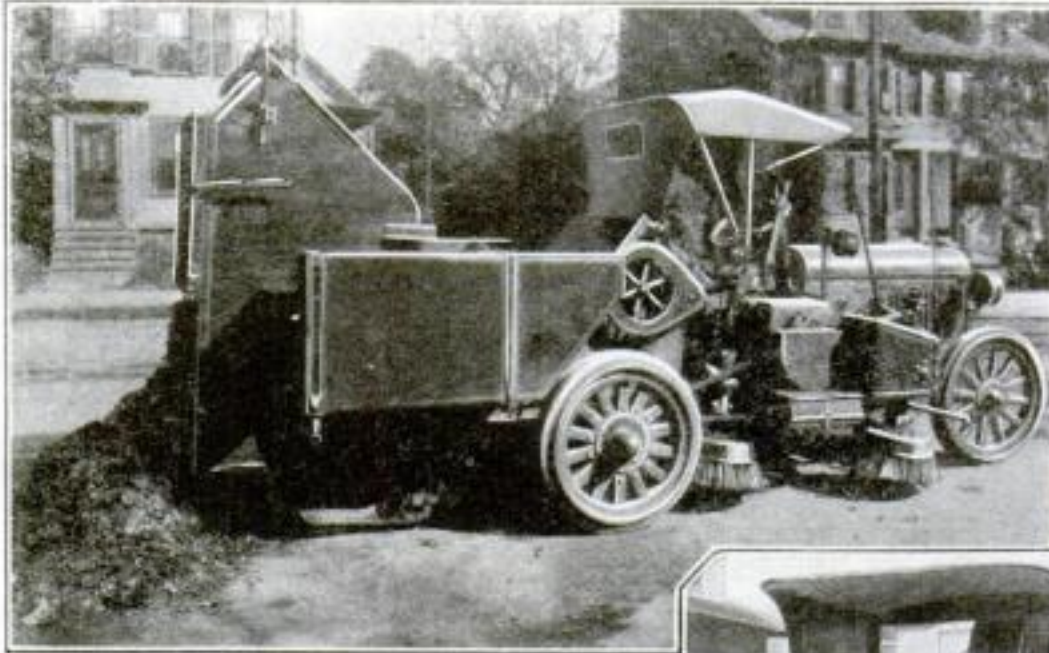

Brushes at the side of the machine shown above sweep dirt with a "scrubbing" motion into a windrow, deliver it by broom to an elevator belt and finally to a dumping hopper

Operating like vacuum carpet sweepers, the machines at right suck up dirt and blow it into trailer vans



material into a windrow so that a pick-up broom, 30 feet wide, delivers it to the elevator belt, which carries it to the dumping device in the rear. Steel brushes last longer and sweep cleaner than the wooden brushes formerly used. A spraying machine keeps down dust while the machine is operating and reduces disease caused by flying germs.

Ancient Planting Machine Used in India

THREE hollow bamboo poles fastened in an upright position to the front edge of a thick plank so that their ends come just in front of three wooden harrow teeth, are the essential features of a semi-auto-

matic seeding machine invented centuries ago by the natives of India, and still used by the farmers of the South Deccan.

The bamboo poles act as pipes, and at the upper end all pass through the bottom of a small wooden bowl that holds about a quart of grain. An abundance of cheap handmade rope is wound around the structure to give strength.

One man drives the team of bullocks that pull the seeder over the plowed field, and a second man operates the contrivance. The sower fills his loin girdle with grain, and stands upon the plank. As the team gets under way, he puts small handfuls of grain into the bowl. The seed falls through the poles to the ground, where it is covered with earth by a harrow fastened underneath the plank.



Seeds fed into a small bowl drop through bamboo tubes to the ground and are covered with earth by harrow teeth

Nozzle for Auto Washing Fits Palm of Hand

AMONG the novelties in garage accessories is an aluminum nozzle small enough to fit in the palm of a person's hand, and which may be used for washing automobiles. It is screwed to the end of a hose attached to a hydrant faucet and emits a fine but powerful spray for rinsing purposes.


When used with a sponge, the nozzle does not send out a spray, but allows a copious supply of water to percolate through the pores of the sponge, keeping constantly wet while it is in use.

In using the washer, the nozzle is held in the right hand, with the fingers over a curved bar. Pressure on the bar turns on the water, and releasing the pressure shuts it off. If a sponge is used, it is held over the spray with the fingers of the hand holding the nozzle, while the other hand guides the hose.



Pressure on grip turns on water

Does Dust Shot from Sun Cause Storms on Earth?

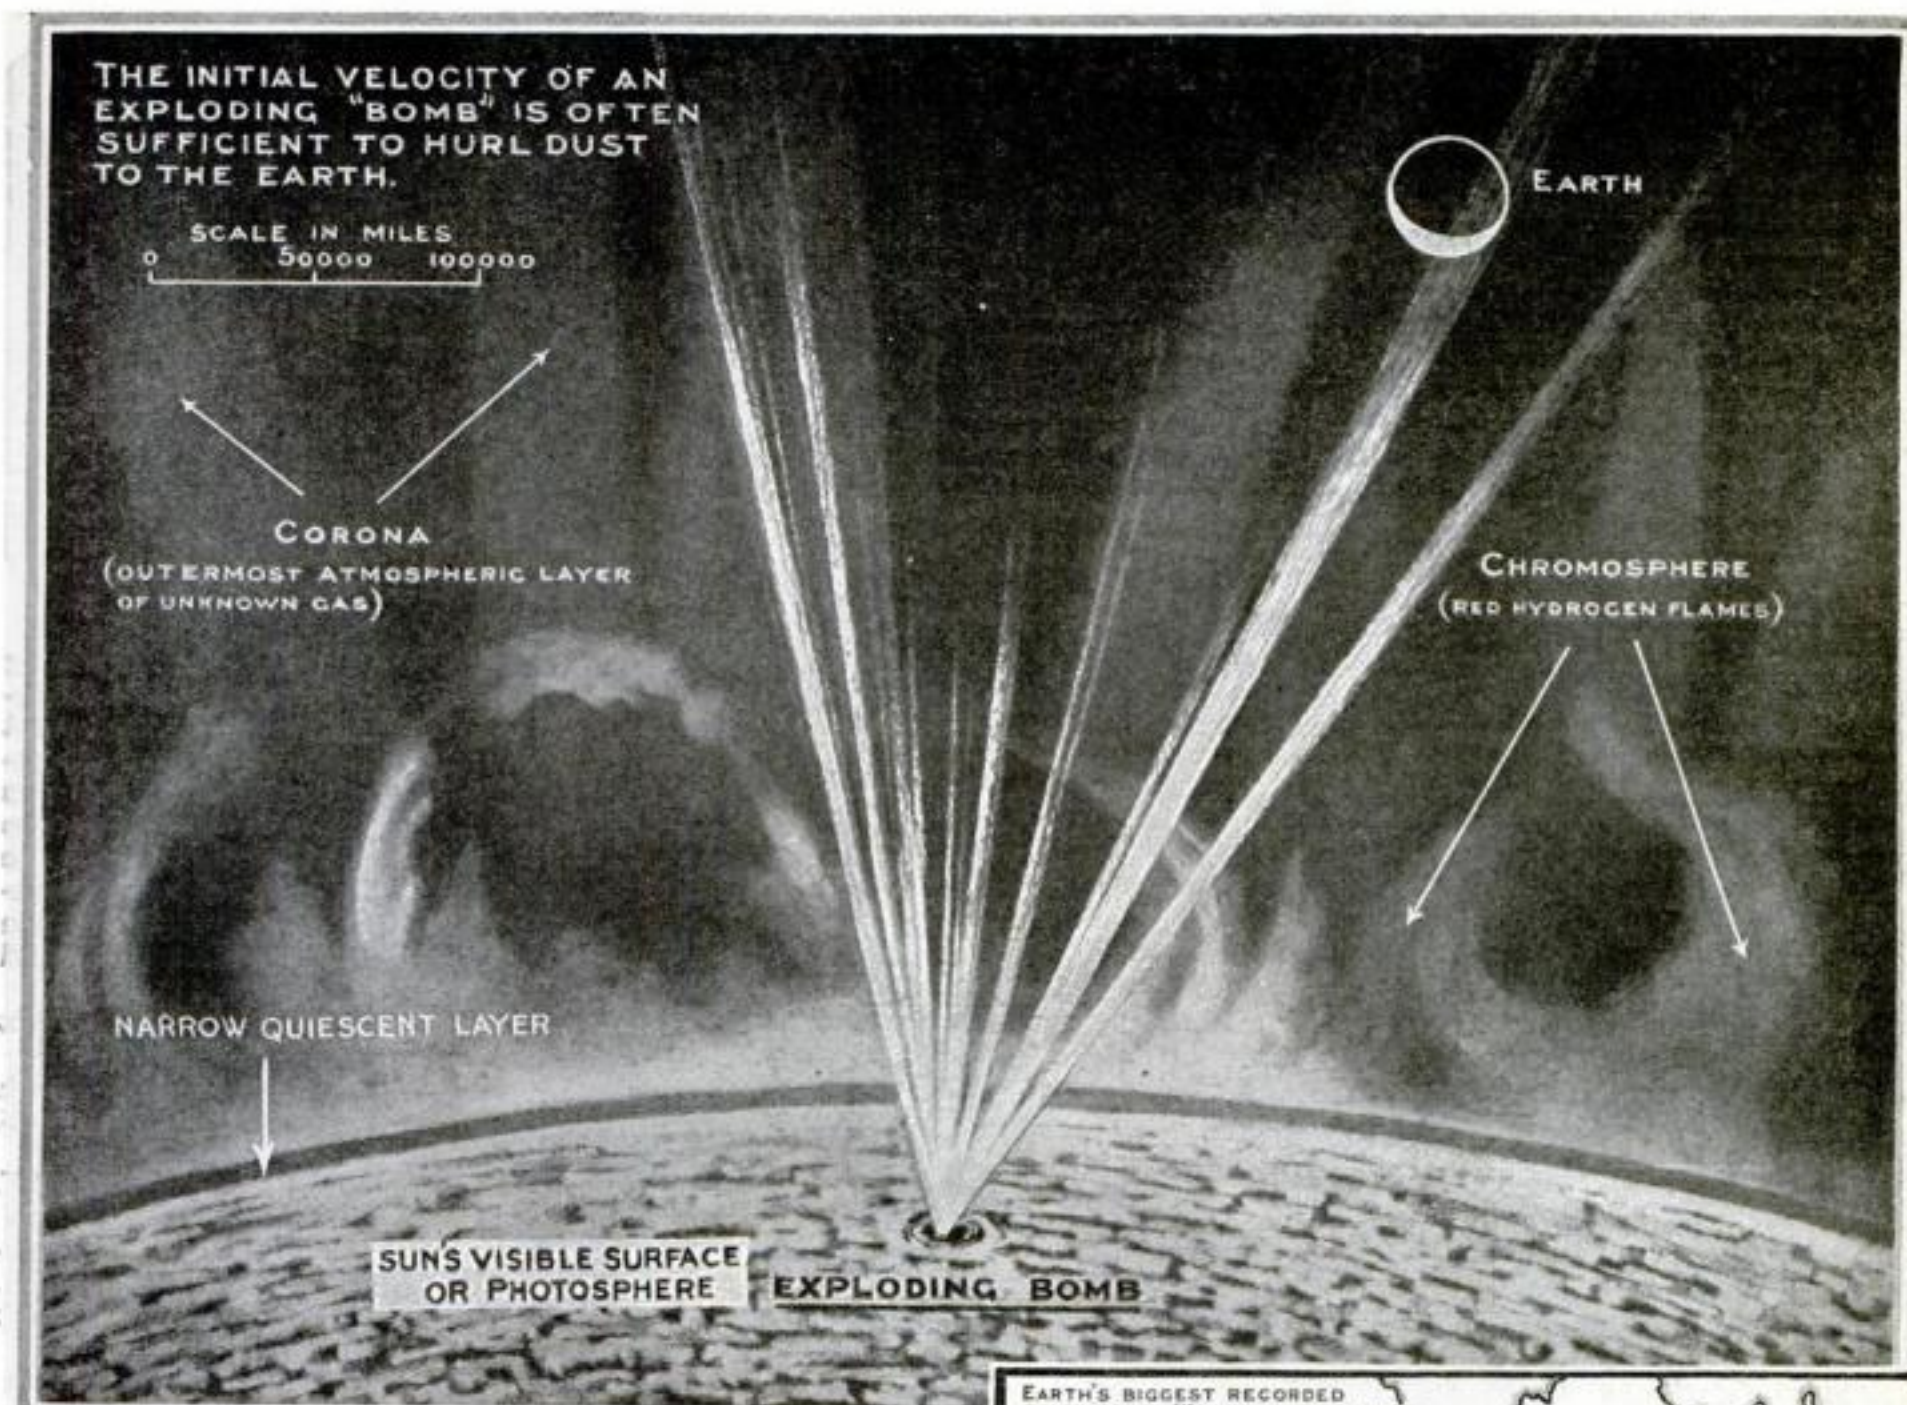

© Popular Science Publishing Co. Inc.

By Scriven Bolton, F.R.A.S.

IS THE earth being bombarded continually by explosions of huge solar "bombs," shot from the sun's surface? Science believes that it is and that the air we breathe often becomes abnormally charged with this "bomb" dust, causing unnatural vagaries of the weather such as rain and electrical storms.

These solar explosions, powerful enough to hurl electrically charged dust particles 93,000,000 miles to our earth, are 50,000 times as tremendous as the greatest terrestrial convulsions ever known. Shot forth like great Roman candles from the sun's fiery interior, the bombs are often 1000 miles in diameter and are composed of incandescent hydrogen estimated to have even a higher temperature than that of the sun's surface—15,000° Fahrenheit.

50,000 Volcanoes in One Bomb

Just how terrific the explosions are may be imagined from the fact that the greatest terrestrial convulsion on record—the eruption of the volcano Krakatoa in Sunda Strait, near the island of Java, August 27, 1883—represented but one fifty thousandth part of the energy believed to be released in a single explosion of a solar bomb. The reverberation from the Krakatoa eruption shook our entire globe, sending measurable ripples of air twice around the earth and hurling fine dust to a height of 80 miles. Yet one solar explosion hurls dust particles millions of miles into space.

On the surface of the sun the force of

This diagram shows present scientific knowledge about the sun. From the sun's surface exploding bombs of incandescent vapor, exerting a force 50,000 times as great as that of the world's most terrific volcanic eruption (Krakatoa, 1883) bombard us with dust clouds



gravity, irrespective of atmospheric friction, is powerless to check an upward initial velocity exceeding 385 miles a second. Particles exceeding this velocity when hurled upward by a tremendous solar upheaval fly into space, never to return.

These particles, it is believed, form the dust shoals that bombard our earth and other planets. Since the dust is electrically charged, it probably causes phenomena such as severe magnetic storms during which the compass needle is agitated. On rare occasions the surplus electric charge has been known to paralyze telegraph and tramway services. Moreover, some meteorologists firmly believe that clouds and raindrops would not form in our atmosphere without the presence of this dust. It becomes obvious, therefore, that when the earth is passing through a dust shoal, clouds and rain may be more prevalent, and seasons subjected to bewildering vagaries.

Astronomers now are seeking to discover the cause of these strange solar bomb explosions. While they know practically

nothing about the heart of the sun, they have learned that this nucleus is surrounded by definite concentric layers, first by a luminous envelope of vaporous matter called the "photosphere," which we see when we look at the sun; then by a second layer of glowing gases cooler than the photosphere and forming a smoky veil from 500 to 1000 miles thick; thirdly, by a sea of red, surging fire, consisting chiefly of flaming hydrogen vapor, and called the "chromosphere." From this sea great tongues of hydrogen and calcium vapor flames are driven outward for thousands of miles by some mighty unknown force.

Finally, the outermost region of the sun is an atmospheric layer, consisting of unknown gas, called the "corona," a silvery halo that we can see during an eclipse of the sun.

Scientists tell us that much of the light of this halo probably is sunlight reflected from particles of dust like those that tremendous solar explosions drive to our earth in clouds.



Fog Dispelled by Oil Film on River Surface

ARMED only with a city sprinkling wagon placed on a government barge, a mixture of oil and organic acid, and data obtained in laboratory experiments, Pittsburgh, Pa., scientists, co-operating with the United States Engineering Department and the Weather Bureau, recently outwitted nature, proving that fog prevention is possible.

By pouring an oil film over the surface of the Monongahela River from Rices Landing, 35 miles south of Pittsburgh, to a point 1½ miles upstream, the scientists succeeded in cutting a distinct lane through the river mists, demonstrating that any city situated on an inland body of water can rid itself of much of its fog nuisance. In Pittsburgh, where the Monongahela and Allegheny rivers join to form the Ohio, the fog nuisance has been so serious at times as to tie up traffic. By shutting off sunlight, it has menaced the city's health and has cost thousands of dollars in damages and in abnormal consumption of electricity for lighting.

The experimenters aboard the government boat "Evelyn," towing a barge equipped with a crude sprinkling apparatus, began their work at 10 o'clock one evening, after a heavy fog had settled. As the sprinkler began pouring a path of oil in the wake of the barge, a strange phenomenon occurred. Everywhere ahead of the boats was a heavy blanket of mist; but in the rear the

Spraying the water with a mixture of oil and organic acid from an old sprinkling wagon mounted on a scow (at right), experimenters cleared a path through heavy fog on the Monongahela. Fog remained on each side of the oil film, as shown below

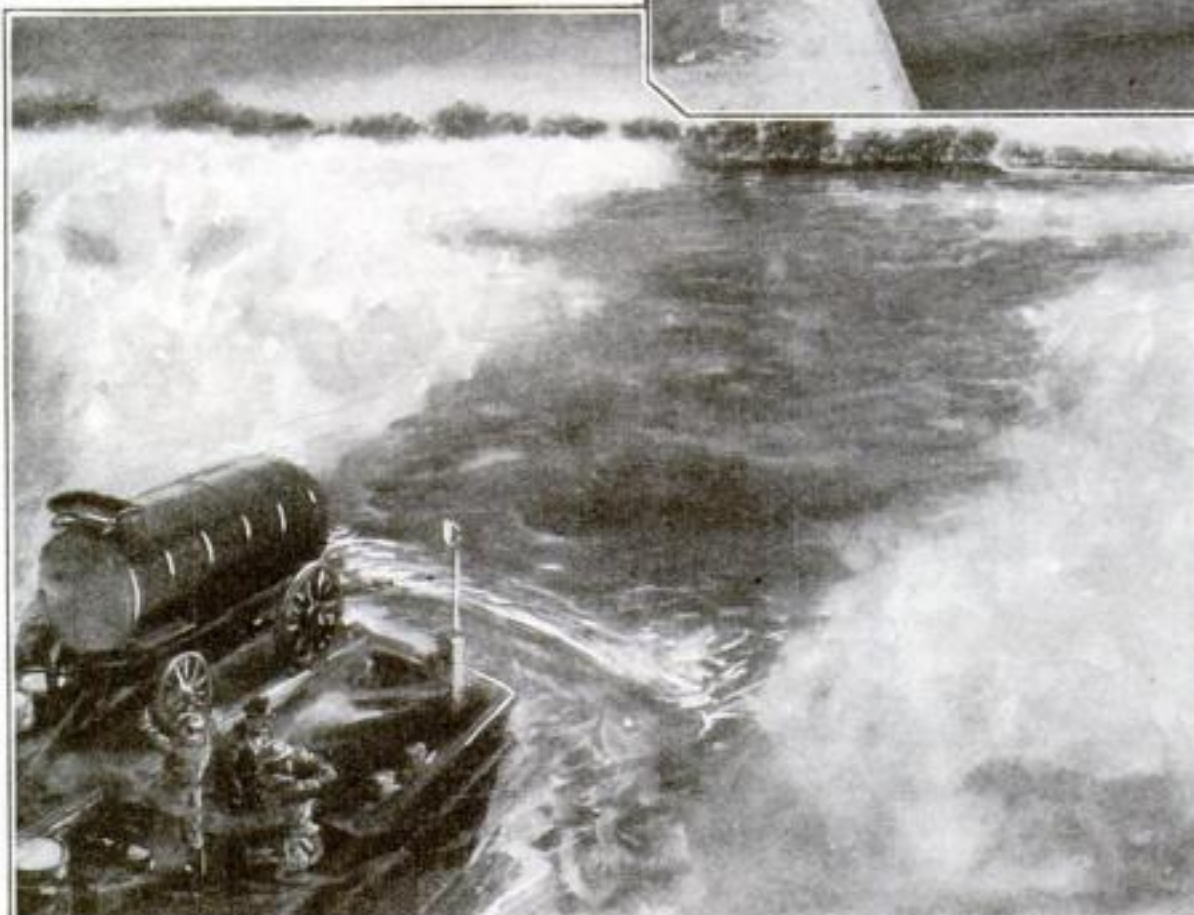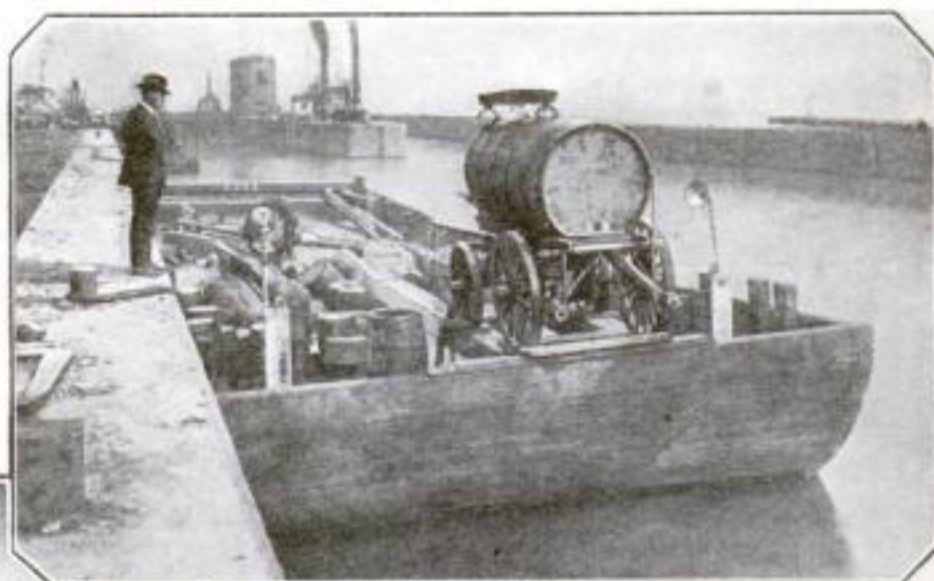

On the following morning, a trip of inspection showed that the oil covered the entire surface, but was too thin in spots to be effective. Yet for the first time in five mornings, government men at Rices Landing could see across the river.

The following facts are significant:

Less than \$75 worth of oil and organic acid was consumed.

Scientists estimated that if a proper amount had been available, the oil film would have been effective for about 100 days.

An organic mixture added to the oil made

possible a film of one one-thousandth of an inch in thickness—the thinnest film ever created in open air.

The treated oil spreads 25 times as fast as untreated oil.

Speedy New Battle Tanks for Army

FOLLOWING recent amazing exhibitions by a new amphibious gun carriage tank that "runs like a rabbit, climbs like a squirrel, and swims like an otter," nearly a hundred military authorities of this country pronounced it one of the most revolutionary war machines ever invented. Now a second new development of the war tank, exhibited by the army at Washington, known as a "speedster," attains a speed of 40 miles an hour, and is considered almost shellproof because of the pace it sets.

Tank Crosses the Hudson River

The amphibious tank, carrying a "six pounder" and three machine guns, traveled at a speed of 30 miles an hour down Riverside Drive, New York City, was then converted into a tractor and easily climbed a 45-degree hill, finally completing its performance by accomplishing the astounding feat of propelling itself across the Hudson River and back—1.7 miles each way—in 44 minutes.

Uncle Sam owns the patents on this tank, which is the result of work by Walter Christie, former daredevil auto driver. The tank, 15 feet long, six feet wide, and



© International

weighing six tons, has four wheels on each side that run on a track laid down by the endless tread. When operating with the endless tread removed, the machine attains a speed of from 30 to 40 miles an hour. In the water, the tank is driven by detachable propeller blades.

The new speedster tank is equipped for long runs, carries a 75-millimeter field gun, can accommodate 10 men and supplies and ammunition sufficient to last 10 days.

The army's new "speedster" tank, shown at left, is equipped for long distance runs and can attain a speed of 40 miles an hour. Below: The Christie amphibious tank is shown starting to climb a 45-degree hill in a recent amazing exhibition in New York City, afterward propelling itself across the Hudson like a boat



Sugar Syrup Prevents Frozen Radiators

TO PREVENT automobile radiators from freezing, glucose—or sugar syrup—has been recommended by Dr. Charles H. La Wall, of the Philadelphia College of Pharmacy and Science, as a substitute for anti-freezing compounds containing denatured or wood alcohol.


Because glucose does not evaporate, Doctor Wall declares it is far superior to other mixtures. Using about a pint and a half of ordinary confectioners' glucose to a gallon of water, he finds that the mixture starts to become slushy at a temperature of about 10 degrees above zero, but that it does not actually freeze and harden even at six degrees below zero.

The mixture does not corrode metal parts, he says, nor does it affect rubber.

Ladder of Steel Tubing Is Light and Durable

STEEL tubing is being used by a Detroit concern in the manufacture of ladders, which, it is claimed, are lighter and stronger than wooden ladders.

Oval tubing of specially tempered steel used for the side members is drilled to take round tubular rungs. Threaded tie bolts through the centers of the rungs hold the ladder together.

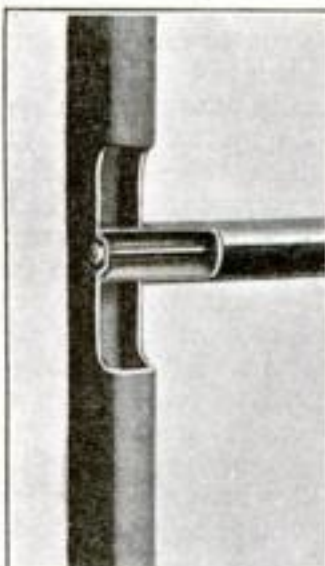

How rung is joined to side members

BY AN ingenious method of attachment, a new type of tractor plow recently introduced into the United States by Harry Ferguson, of Belfast, Ireland, becomes a unit with the machine that hauls it. Only slight exertion on the part



Photo courtesy of Farm Mechanics



Forming a unit with the tractor, the plow may be raised or lowered as shown at left. If the plow strikes an obstruction, as above, the rear of the tractor is raised automatically so that the wheels spin and the plow is not broken.

of the operator is required to raise the bottoms of the plow from the ground. When raised, the plow is suspended in the air, so that the tractor may be driven over rough country, backed up, or maneuvered in any desired way.

One of the unusual features is that the tractor power is conveyed to the plowshares through an inverted V-shaped arrangement of steel bars. Should the plow strike a rock or any other obstruction, the pull tends to straighten out this V and the bearing is so shifted that the rear of the tractor is raised from the ground. This allows the tractor

wheels to spin and thereby prevents the plow from breaking.

The depth to which the plows penetrate is regulated by a single wheel attached on one side and the tilt of the shares is adjusted by a handle. The entire plow mechanism may be raised by depressing a lever.



Sings as She Writes Three Words at Once

BY WRITING three words at one time and accompanying this feat with a song a young German woman, Thea Alba, recently exhibited her remarkable ability to conduct simultaneously four separate non-related actions.

Many of us who have tried to write a figure eight on the wall while describing a circle with one foot will appreciate the skill required for such performance. It was her ability to execute this exercise that made her aware of her unusual powers. Physicians who became interested in her exhibitions decided to study her actions to determine whether her feats were accomplished by separate yet simultaneous thoughts or by an unusual ability to transfer her thoughts quickly.

If these questions are answered, German psychologists believe they will be able to tell us more definitely about our mental processes.

This Rudder Steers or Propels Rowboat

A NOVEL rowboat rudder that may be used either for steering or for propulsion has a rudder board cut in the form of a U. When the rudder is

to be used for steering only, this opening is closed with an oval flap hinged to the arms of the U. When this flap is swung free, it trails in the wake of the rudder.

If the rudder is to be used for sculling, one end of the crossbar of the rudder post is connected by an iron rod with a lever that is moved forward and backward like a pump handle. This causes the rudder with its swinging flap to oscillate horizontally like the tail of a fish, and imparts to the boat a forward motion of fair speed, not as great, however, as that imparted to it by the more strenuous use of a pair of vigorously pulled oars.

Operated by a lever, as shown above, the swinging flap of this rudder oscillates like a fish's tail to propel the boat



Young Scientist Explains Why Stucco Houses Crack

BY DELVING into a field hitherto little explored by scientists, Ben H. Peterson, recently graduated student in chemistry at Coe College, Cedar Rapids, Ia., has succeeded in explaining some of the reasons why many stucco homes crack and otherwise deteriorate sooner than they should. His discoveries may serve as a foundation for other experiments that should prove valuable to builders of stucco homes in the future.

Peterson, who did this work preliminary to writing his thesis for graduation, had no references to guide him. He constructed his own testing apparatus, and worked out his own formulae. Two of the devices he used—a machine for measuring the cross-breaking strength of a bar of stucco and a delicate device that measures expansion under various degrees of heat and cold to the millionth of an inch—are so ingenious that he has been advised to have them patented.


During his experiments, the student tested more than 6000 stucco bars of varying compositions and ran more than 2000 analyses. He tested tensile or "stretching" strength, the cross-breaking strength (by which he determined capacity to bear weight), expansion, solubility, and a number of other qualities of the building material. Variation in stucco material, he found, is due chiefly to lime content.

The Effects of Rain

One of Peterson's chief tests proved how much weight a bar of stucco loses by exposure to water. He found that about five per cent of the weight of a stucco bar was lost after the bar was immersed in water for 120 hours. From this he computed how long a stucco building could withstand dissolving by rain and snow.


In general, Peterson's tests tended to show that the cracking of stucco on a house is due not to composition, within certain limits of lime content, but to shrinkage during setting and to the fact that the stresses on wide expanses of the material are not properly taken into consideration when the house is built. He found, however, that an extremely high lime content causes abnormal shrinkage.

His practical recommendation to architects is that they should panel strips of stucco more than six feet wide, thus relieving the strain caused by varying temperatures, weight, and solubility to rain. Paneling also will facilitate repair,

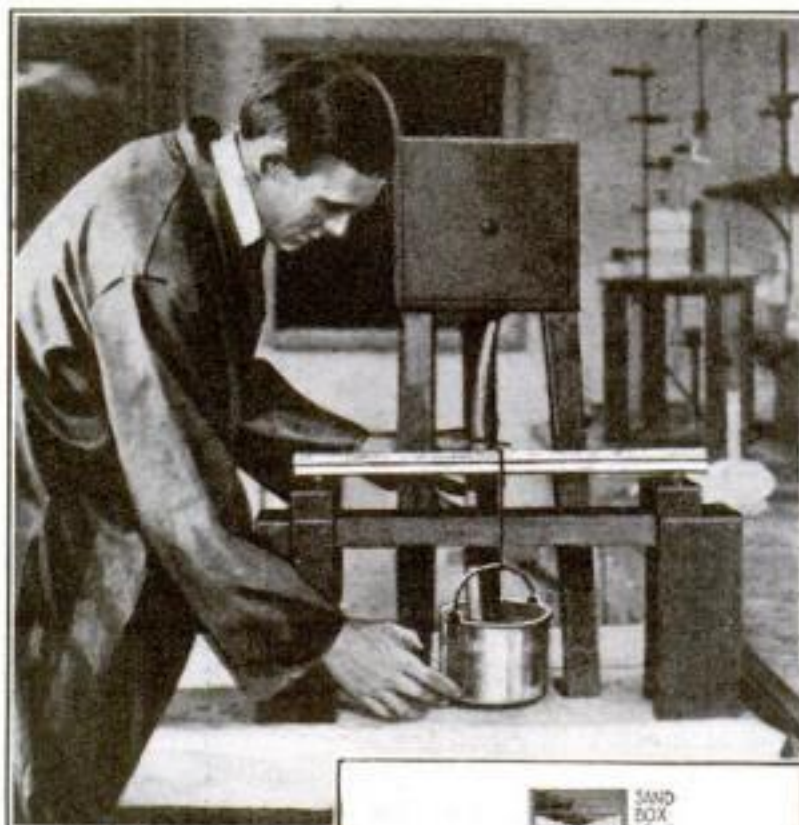

BEN PETERSON, the young student whose experiments have revealed important new facts about stucco construction, is shown above working on the apparatus (described in diagram) with which he tested the cross-breaking strength of a bar of stucco.

Resting the bar on supported rollers, he applied a weight box, connected with a sand box, to the middle of the bar. A stopcock shut off the flow of sand at the breaking point of the bar

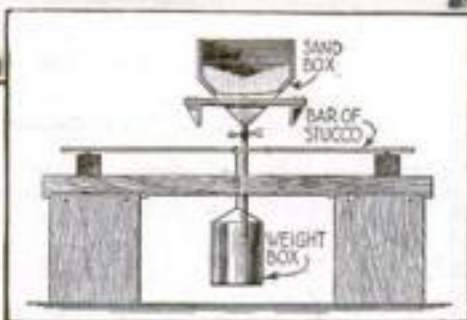

he says. Unbroken strips of stucco all the way across a 30 or 40 foot house, he found, are subjected to fearful strains, even in ordinary ranges of temperature, and are apt to crack.



These two houses show the wrong and the right way of stucco construction, judged by the results of Ben Peterson's experiments. In the house at the left, wide, unbroken expanses of stucco result in cracking, while in the house at the right such expanses are prevented by the broken architectural design

Small Powered Bench Saw for the Metal Shop


SPEED of production in a shop or factory in which metal rods or pipes must be cut to size in large quantities is being increased by the use of a new and extremely handy power driven bench saw that weighs, with motor, only 40 pounds.

The new saw, driven by one-eighth-horsepower motor, is one-thirty-second of an inch thick and has a diameter of $3\frac{1}{2}$ inches. Due to the thinness of the blade, there is little waste of stock in cutting.

The work-holding device has the form of pliers with V-shaped jaws, like a pipe vise, and is pivoted to an arm of the saw support. It holds the stock to be sawed at right angles to the plane of the saw.

By lifting the handles of the holder, the operator holds the stock against the teeth of the saw. A stop gage is provided for adjusting the length of the part to be cut off from the stock.

The efficiency of this saw may be judged from some test results. It cut through a one-half-inch round, cold-rolled steel rod in 40 seconds. Through five-eighths-inch brass rod 250 cuts; through three-sixteenth-inch brass rod 1800 cuts; and through five-eighth-inch round hard rubber 1200 cuts were made in one hour.

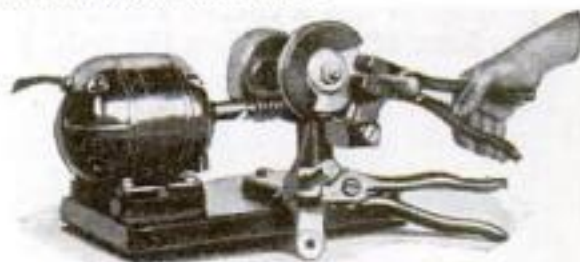

The new bench saw, showing plier-like device for holding the work

How Stucco Compares with Frame and Brick

ALTHOUGH it is impossible to give positive comparisons as to the relative cost and durability of brick, frame, and stucco houses, architects generally estimate that on a basis of 20 cents a cubic foot for frame houses, brick houses of the same class cost 22 cents, and stucco approximately 21 cents a cubic foot. In durability, brick construction is rated first; stucco second, and frame third.

As to the relative advantages of each,

the frame buildings are attractive, easiest to build, and lowest in first cost, but are greatly exposed to fire risks and require much upkeep. Stucco homes are considered extremely attractive, are warm in winter and cool in summer, and their first cost, as well as upkeep cost, is low. Brick homes cost most, but, as with the stucco house, again the cost of upkeep is extremely low, though they lack somewhat the variety possible with stucco houses of the same price.

Burbank's Own Life Story

CALIFORNIA this month celebrates the fiftieth anniversary of Luther Burbank's wizardry in creating new flowers, fruits and vegetables. This grand old man of plant breeding is one of America's most picturesque and fascinating figures. All his past achievements are dwarfed by the fact that at the age of 74 he has come to cherish the dream of raising a better race of humans according to laws he has discovered in plant raising.

Burbank writes of his work and his dream in an article that every American should read in the April number.

Tree-Destroying Moss Used to Stuff Mattresses

AN INDUSTRY from which the South, especially Louisiana, derives an income of \$3,000,000 annually has been developed by the commercialization of methods of converting the picturesque but tree-destroying "Spanish moss" into a cheap substitute for horsehair for use in mattresses and upholstery.

Spanish moss is the name given by Spanish settlers to an epiphyte or "air plant," gray in color, which hangs from the tree branches in the South, looking like enormous beards. Although like an ordinary parasite in that it grows over the tree, it does not derive its nutrition from the tree, but from the air.


The best Spanish moss grows to a length of four or five feet. Most of it is gathered after cypress trees are felled for the saw-mills.

In the bayou districts, moss gatherers float under trees in flat boats and drag the air plants down with long poles. Then they carry the moss in bundles to their homes, where they heap it in big piles, sprinkling these with water, which causes the outer bark to rot off. After it has been thus cured, the moss is sent to a gin, where it is run through a set of double rollers equipped with teeth, a fan blower, and a baler. The rollers crush the sticks, teeth comb out the moss, while blowers dry the moss and blow away the trash.


Each year Louisiana ships from 2000 to 5000 carloads of ginned moss, which brings from six to 11 cents a pound.



Above, Spanish moss hanging like gray beards from an avenue of oak trees in Louisiana. Left, gatherer returning with his day's "catch" of moss

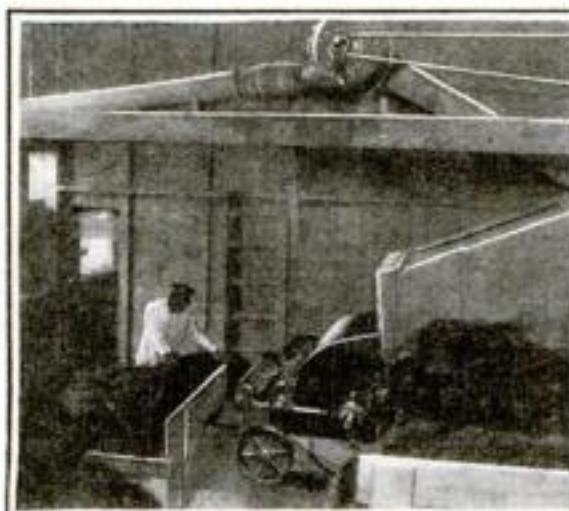

Moss gin, where "vegetable hair" is combed, freed from impurities, and dried

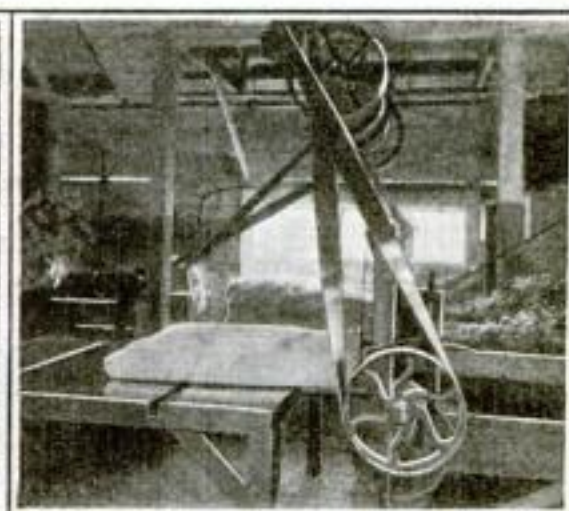

Machine stuffing mattresses with ginned Spanish moss used as horse-hair substitute

Mechanical Arms Pick Up and Elevate Boxes in Tiers

ARRANGEMENT of boxes and other materials in tiers has proved such an expense to factories that engineers, casting about for a means of doing this work mechanically, have succeeded in designing a small electric storage battery tiering truck equipped with sets of arms that imitate human arms.

The attachment consists of two sets of arms and an elevating mechanism, located on the front of an electric truck. In using the longer set of arms to pick up square boxes, it is necessary to have the material raised a few inches above the floor. The operator lowers the two arms and inserts them under the pile by moving the truck forward. Power is applied to the elevator screws and the load is raised from the floor. The truck is then run to the tier and the material raised to any elevation up to six feet, and deposited.



Mechanical arms grasping cylindrical container

The second set of arms picks up round or flat packages by holding on to handles. When changing from one set of arms to the other, the operator simply moves a lever and the two sets automatically change positions. This is done by gear quadrants connecting the two sets.

Fertilizer from Straw

A PROCESS for the artificial production of effective fertilizer from straw has been patented in England.

Straw is subjected to the action of a culture of cellulose-destroying organisms with the addition of certain chemicals to start the reaction. The final product contains about two per cent of nitrogen. Any farmer, it is claimed, can turn his entire straw crop into about half its weight of nitrogen-bearing fertilizer.

Re-Covering Your Auto Top Cheaply


By G. A. Luers

A MOTORIST, who had painted his roadster dark blue and had given it a high luster with coach varnish, found that the old mohair top looked shabbier than ever by contrast. He decided to re-cover the top himself and found the work not as difficult as he had imagined.

He measured the amount of material required and bought sufficient heavy, closely woven brown duck for the new top, as well as binding tape of the same color, some brown cambric for the shabby bolsters, an oval rear light glass with an aluminum frame, round head upholstery tacks, and a little oak coach varnish.

As he removed the top with a tack puller and pliers, he noted how each piece was fastened. He then refinished the top bows with varnish, cut new stay straps from brown duck, and made them fast to the bows. The bolstering was covered with cambric and fastened in place.

Using the old top as a pattern, he

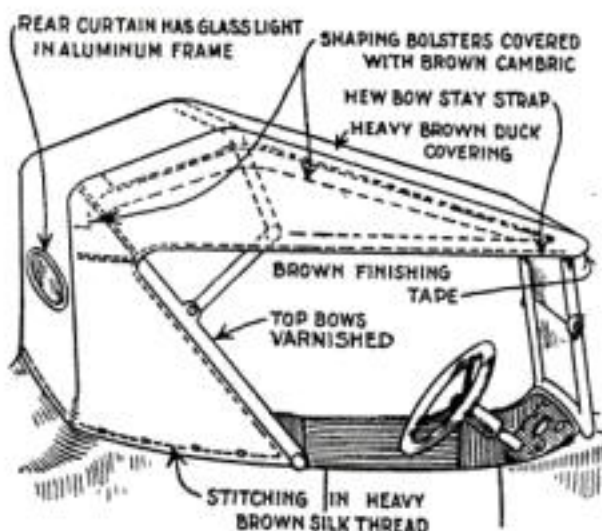

The old top serves as a pattern for cutting a new cover

next cut the brown duck to the exact shape and sewed the pieces together on the sewing machine with heavy brown silk. The rear light was set in the back section and then the new cover was spread over and tacked to the frame while the frame was held in position with bindings of heavy twine. The finishing tape was put on and the top then matched in newness the appearance of the

newly painted and varnished car itself.

No special tools are required and nothing about the work is difficult, although care must be taken to cut the materials the exact pattern of the parts removed and in aligning the top bows properly before putting on the new covering.

It is necessary to use a tape line frequently to make sure that pieces on opposite sides are uniform and that the rear curtain is located so that the light is in a central position. A new top usually increases a car's selling value far more than the cost of labor and materials involved.

Rotary Brush Removes Carbon Dust from Auto Engine

OFTEN the tops of pistons and the walls of the combustion chamber in an automobile motor are not thoroughly cleaned of fine carbon dust after they have apparently been scraped clean. The removal of this dust can be accomplished with a wire brush and a small hand drill.

Cut off the brush handle, drill a hole exactly in the center, thread in a wood screw, and cut off the head of the screw. This provides a metal shank that can be held in the hand drill chuck. With this rotary brush the tops of the pistons and the walls of the combustion chamber can be polished, which insures better engine performance and tends to prevent the carbon forming quickly again.—R. FRANKLIN MUNDORFF, Kansas City, Mo.




Wooden Blocks for Garage Floor

A NEIGHBOR who recently put in a portable garage and was particularly anxious to have it comfortable, made a floor of wooden paving blocks obtained at a nominal cost from the surplus stock of a street paving company.

The earth was leveled and the blocks laid in even rows. Since the blocks were creosoted, no precautions were necessary to prevent decay. In case it becomes necessary to move the garage, the floor can be taken up and relaid.—L. D. W.

Burned Out Electric Lamp Tests Automobile Spark Plugs


A NOVEL method used by an automobile mechanic to test out spark plugs while the automobile engine is running requires nothing more than a burned out electric light bulb and a piece of wire. The wire is twisted around the socket to form an extension and is touched against the engine head while the central terminal of the lamp is pressed



against the spark plug binding post. If the spark is functioning properly, it is visible between the lead-in wires in the globe.

Removing Small Fender Dents

ALMOST every autoist is confronted at some time or other with the task of removing a small dent or dents from the fender of his automobile. This is sometimes a difficult undertaking, but a simple method that usually works well is to clean the dent carefully, fill it with solder, and scrape off the solder flush with the surface of the fender. The solder is then painted to match the rest of the finish.



Such a repair is apt to be more satisfactory in appearance than when straightened with a block and hammer.—F. A. L.

Vibrating Coil Overcomes Bad Ignition

THE addition of a vibrating coil will sometimes remedy serious difficulties in an ordinary battery ignition system. Such a system supplies a single spark and when the ignition, carburization, cylinders, and valves are in first class condition, that is sufficient. When, however, the ignition coil breaks down, the ignition mechanism and the carburetor become worn or are out of adjustment, and the cylinders, valves or valve stem leak, a succession of sparks is apt to improve the running to a marked degree.

An ordinary vibrating coil, such as is used in Fords, is substituted for the regular coil. Therefore, when the breaker points close, a steady stream of sparks passes between the spark plug points. The breaker mechanism is designed to generate a spark at the plug points when the breaker points open, but this device starts a stream of sparks when the breaker points close, previous to opening, and this stream continues as long as the


points are closed. Sometimes retiming may be found necessary.

This expedient is particularly effective in improving the running of a faulty engine at low speed because the series of sparks occur when the engine is operating on practically a closed throttle.

The coil is mounted so that the bottom contact is grounded on the frame of the car or the engine and a wire is carried from the lower contact to the top of the distributor. The coil wire of the circuit breaker connects with the upper contact, and the other wiring from circuit breaker to switch and to battery remains unchanged.

Since a vibrating coil costs little, it is possible to try out this device without

much expense. Installations that have been used have given such satisfactory results that it may be concluded that a used car fitted with a vibrating coil is given a new life not possible even by entirely renewing its single spark type of ignition system.—A. L. B.

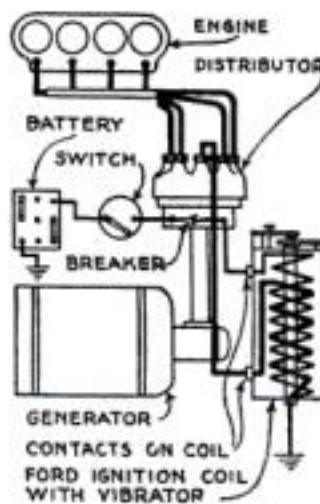

How the vibrating coil is connected

Repairing a Cracked Windshield

TO REPAIR a cracked windshield, first take a piece of sheet steel and bend it to the shape of a channel slightly larger

than the thickness of the glass. Next, soak a piece of canvas or similar goods in shellac and lay this over the edge of the glass. Force the channel over the canvas onto the glass.—J. S. MITTAG, JR.



The Home Workshop

New and Useful Things to Make with Tools

Tools for the Home Workshop and Their Care

The Kit I Use for Odd Jobs about the House

By A. E. Elling

IS YOUR home workshop really well equipped to do all the odd jobs about the house that would cost money if you appealed to an outside man? Have you enough tools? Have you the right tools? Do you know how to care for them properly?

Good tools represent a permanent and valuable investment, which can be wasted by lack of care. Too many tool users buy them in a rather haphazard fashion, getting odd tools for odd jobs, one at a time, without building up a well balanced, completely planned set. As a result, they find that the needed tool is not at hand in an emergency.

I have listed below what seems to me the ideal tool set for general house woodworking jobs. If my own tools were lost, these are the ones I should feel it necessary to obtain. Others would be needed for bench work and still others for metal work; I am speaking now only of general household woodwork. The list is, of course, not complete, and yet may be too complete for

Crosscut saw, 26 in., 8 pts. Ripsaw, 26 in., 5 pts. Compass saw, 12 in. Backsaw, 10 in. Hacksaw frame, 8 in., with blades.
Fore plane, iron with wood bottom. Jack plane, iron or iron with wood bottom. Smooth plane, iron. Block plane, iron. Rabbit plane, iron or wood, $\frac{3}{8}$ in. or 1 in.
Chisels— $\frac{3}{8}$, $\frac{1}{2}$, $\frac{3}{4}$, and 1 in. Butt chisel (short) $1\frac{1}{4}$ in. Gouge, $\frac{3}{8}$ in. Cold chisel, $\frac{3}{8}$ in.
Auger bits— $\frac{3}{8}$, $\frac{1}{2}$, $\frac{3}{4}$, $\frac{1}{2}$, and $\frac{3}{4}$ in. Expansive bit with 2 cutters. Gimlet bits or bitstock twist drills, from $1/16$ to $1/2$ in. Screwdriver bit, $\frac{3}{8}$ in. Rose countersink.
Brace, 8-in. sweep.
Hammer with bell or slightly rounded face.

Screwdriver
Two-foot rule
Marking gage
Trysquare, 6 in.
Oilstone
Oilcan
Combination pliers, 6 in.
Carpenter's pincers, 8 in.
Monkey wrench, 10 in.
Level, light metal or wood
Spokeshave, wood or metal, 2 or $2\frac{1}{2}$ in. cutter
Cabinet scraper and burnisher
Sliding T bevel
Half round wood rasp, 10 in.; flat bastard file, 8 in.
Saw vise, saw set, and slim taper saw files, 5, 6, and 7 in.
Tool grinder
Steel square, 16 by 24 in.
Wing dividers or carpenter's scriber
Nail set, $1/16$ in. cupped point



Three Experts Unlock Their Toolchests for You

LIVING in what might be called a toolmade world, every man finds fascination in the subject of tools and tool craft. In fact, the use of tools in the home workshop has lately become a leading hobby in this country—a hobby that is winning new recruits daily.

"What tools shall I buy?" and "How can I get the most out of my tools?" are two questions repeatedly asked us both by these new tool users and many others who already have the home workshop hobby.

To compress authoritative answers to these questions in the smallest possible space, POPULAR SCIENCE MONTHLY asked three experts to tell just what tools they use in their own home workshops and how they care for them.

Mr. A. E. Elling tells of woodworking tools on this page, Mr. Joe V. Romig discusses the tools he uses for home metal work on page 112 and Mr. George A. Luers writes on "How I Choose Tools for Repairing My Auto," on page 114.

some; but it will give you an idea of what experienced tool users find essential.

In buying small bits I prefer to get bitstock twist drills that will cut both metal and wood.

As to the care of tools, most common tools are comparatively foolproof if given a reasonable amount of attention. The plane is one of the tricky tools, but when the home worker once learns how to keep his planes, chisels, and saws in good condition, he will not have much trouble.

Tools should, of course, be of good quality to start with. I remember a young man learning his trade who was trying out a smooth plane he had just bought. Having no success with it, he appealed to me and I sharpened it and told him to try again, but

in a short time it refused to cut. Then I knew the cause was not in the sharpening or setting of the blade, but in the poorly tempered steel. After taking off a few shavings, it fell down on its job.

This is the greatest discouragement that is apt to come to the amateur woodworker—trying to keep in condition a piece of soft steel or, much more rarely, a very hard or brittle blade. Some mechanics profess to be able to judge by looking at it, from its color and general appearance, but personally I have never felt sure of this and I notice that these men, like myself, want the maker's name back of the blade as a guarantee that it is a piece of good steel. If, after sharpening a tool, you find it will not hold its edge a reasonable time on tough wood, exchange it, have it tempered again, or throw it away.

When not properly adjusted, planes sometimes choke or chatter and are not sweet cutting. A careful examination must then be made in both iron and wood planes to see if the back or cap iron fits perfectly tight and snug when screwed to the cutting iron, as at A, Fig. 1. Sometimes a very slight opening in one corner will let in a light shaving and that at once chokes the plane. Use an oilstone and a fine file on the back iron to make the two blades fit absolutely tight, so that not the thinnest shaving can get between them.

Again, when the iron is in place, held by a clamp in iron planes, or in a wedge in wooden ones, the blade is sometimes tighter on one side than the other. This may be only a trifle, yet enough to cause trouble. It may be remedied by adjusting the seat or bed of the plane with a file or chisel. It is absolutely necessary that the blade should

(Continued on page 108)

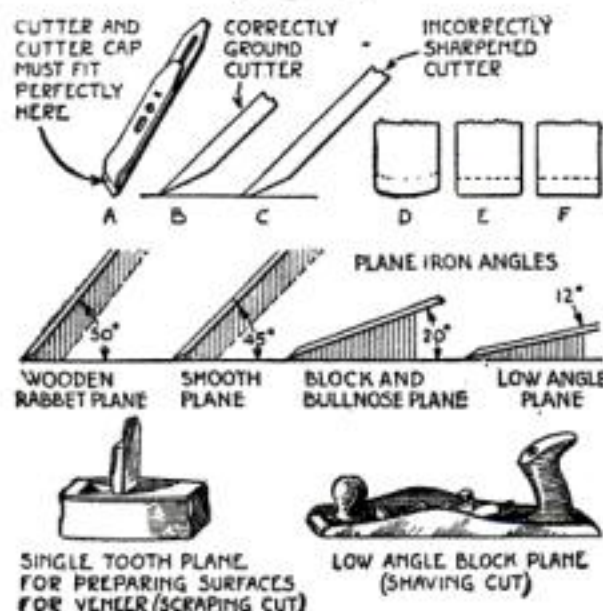


Fig. 1—Points of interest about plane cutters and two extreme types of planes

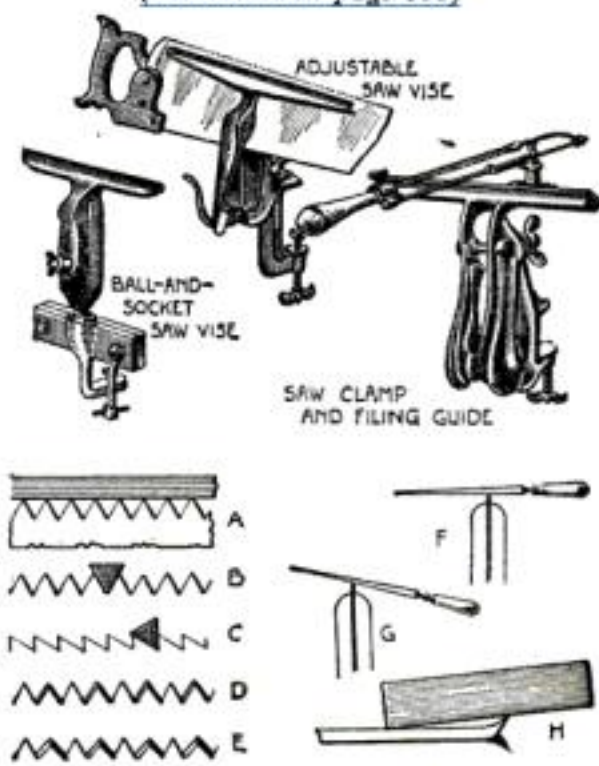


Fig. 2—Saw vises and diagrams to aid you in sharpening your saws

Telephone Table Serves as Writing Desk


THE addition of drawers for "3 by 5" filing cards and a rack for stationery makes this telephone table a particularly useful piece of furniture, and it can be used, when necessary, as a writing table. The telephone rests on a swinging arm and turns back out of the way when not in use. A compartment with a door that lifts is provided for telephone directories.

The stool is kept under the table except when needed, and slides on two runners, so that there will be no danger of scraping the floor or racking the stool in handling it.

Both the table and stool are of the simplest construction. They can be made of oak, gumwood, or mahogany, or of one of the cheaper woods, such as birch or whitewood, and stained or enameled to match other pieces of furniture in the room in which they are to be used.

Some Dimensions

The table top is 17 by 21 in. and stands 30 in. high. The telephone arm has a round spindle that passes through the top and the first shelf and serves as a pivot. A stationery rack is provided at the back, to the

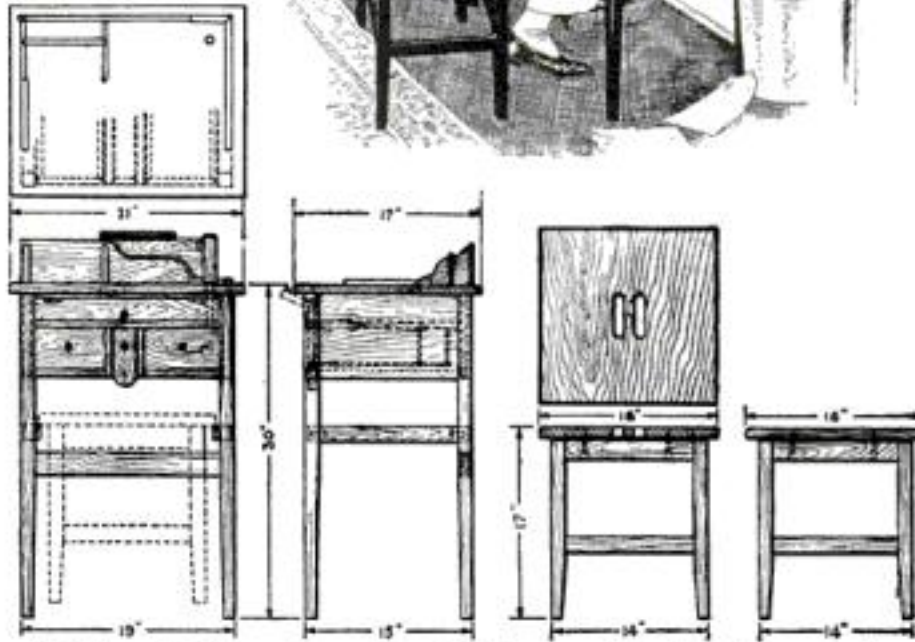

Full size details and complete bill of materials for this attractive telephone table and stool are contained in Home Workshop Blueprint No. 18

left of the telephone arm, thus giving the table its right to pose as a desk.

Directly beneath the top is the directory compartment, which should be no larger than necessary to hold the telephone books. For very thick directories, such as the New York City directory, the depth of the compartment should be increased accordingly. This space is closed by a door hinged at the top, with a knob for lifting it.

Filing Cabinet Is Included

Below the directory compartment are three drawers, two of them for holding 3 by 5 in. cards. These cards can be used for names and addresses, memoranda, and indexes that it is desired to keep handy. The drawers are each 12 in. long inside, so they will hold a large number of cards. The center drawer is narrow and may be used for pens, pencils, ink, and other writing materials.

The stool stands 17 in. high and has a top 16 in. square, in which two holes are cut to provide a hand grip.


If oak is used, and there is no need for matching, try a more unusual finish, such as frost oak or forest green.

The full working details of the telephone table and stool and a complete bill of materials are contained on a 15 by 22 in. blueprint (No. 18) that can be obtained for 25c from the Blueprint Service Department, POPULAR SCIENCE MONTHLY, 225 West 39th Street, New York.

How to Build a Cedar Chest that Will Last for Generations

FEW pieces of furniture that the home worker can make are more appreciated or will better repay his efforts than a cedar chest. It is comparatively easy to build a chest, the material costs comparatively little, and if care is taken in selecting a good design and working out the details accurately, the home mechanic is pretty sure to make a finer chest than the average commercial one.

A good chest improves with age and often becomes a family heirloom. The rich coloring of Tennessee cedar is never tiresome and deepens with age. And the usefulness of a cedar chest goes without saying, as it forms an ideal storage place for furs, linens, and valuable fabrics, serving as a hold-all.

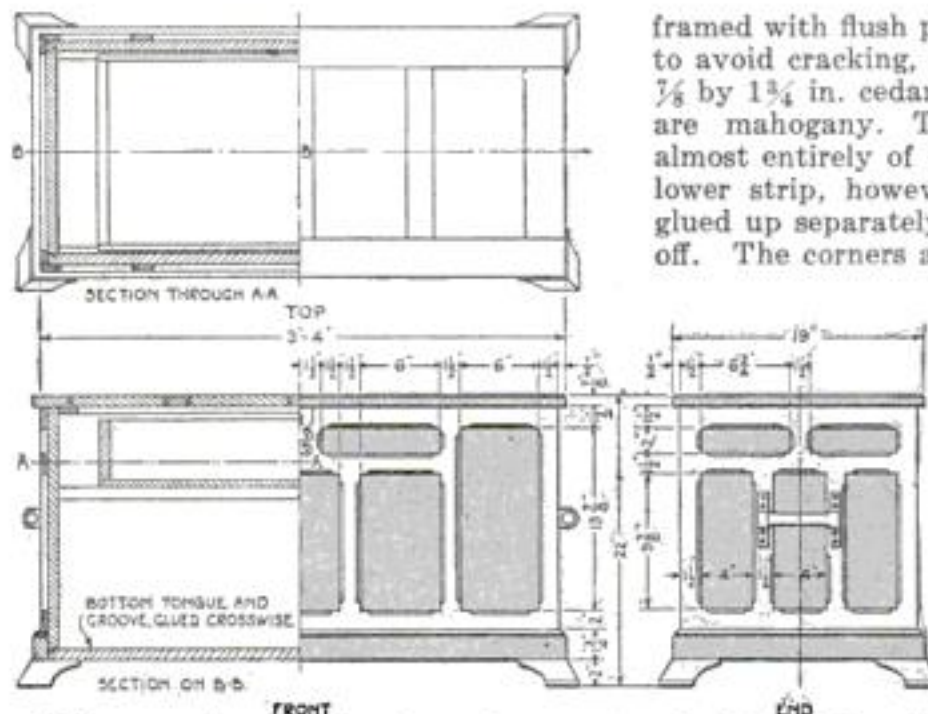

Mahogany trimmed cedar chest, the parts in cedar being indicated by the half tone shading. Blueprint No. 17 gives additional details

framed with flush panels for the sake of durability and to avoid cracking, is 19 in. by 3 ft. 4 in. The base is $\frac{7}{8}$ by $1\frac{3}{4}$ in. cedar, mitered at the corners. The feet are mahogany. The mahogany frames are made almost entirely of $\frac{1}{2}$ or $\frac{3}{8}$ in. by $1\frac{1}{2}$ in. strips. The lower strip, however, is 2 in. wide. Each frame is glued up separately, chamfered as shown, and cleaned off. The corners are then mitered and the frames are glued to the cedar box and held in place while the glue is setting with hand screws and, if necessary, a few brads. A simple mahogany molding is mitered around the chest above the base.

The escutcheon for a chest of this character should be handmade, if possible. The design for the one shown on the chest is based on a four-leaf clover motive. The handles are shaped from maple fastened to the ends with countersunk bolts. Strips of



Simple chest with copper bands

One of the most strikingly beautiful chests that the home craftsman can make is the mahogany trimmed cedar chest illustrated at top center. It is a red cedar box, with simply made joints, to which are applied frames of thin mahogany. These form a panel effect and the contrast between the two beautiful woods enhances the grain and coloring of each of them so that the result is exceptionally fine.


The chest proper is 3 ft. 2 in. long, 17 in. wide and 19 in. high. The top, which is



A commercial chest in walnut and cedar

brass or copper are then screwed over the handle ends as illustrated.


A sliding tray, 6 in. less in length than the inside length of the chest and $4\frac{1}{2}$ in. deep inside, is provided, and for durability the joints should be dovetailed. Two or three ordinary chest hinges may be used with the offset flaps sunk sufficiently into the cedar to allow for the additional thickness of the mahogany trim. For a finer construction, continuous nickel-

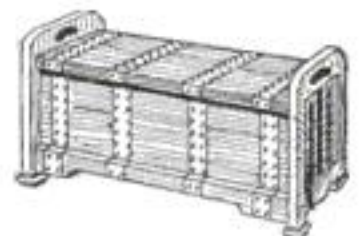

Seat chest of standard design

(Continued on page 100)

The IRWIN Line of AUGER BIT SETS

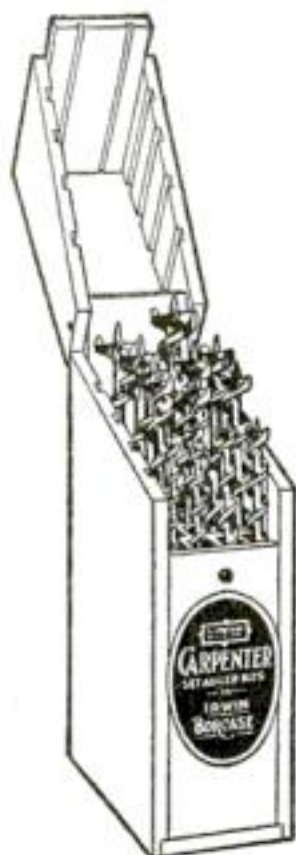

The New
Irwin Borcase

THE IRWIN BIT SETS are the newest thing in fine tools. The new Borcase and Borkit illustrated are both exclusive features of the Irwin line.

Both the case and the kit of bits are made so that all the bits can be kept in the order of their sizes. This means quick selection of the exact size needed.

In the new Irwin Borcase and Borkit all bits are protected from rust—and as they don't come in contact with other tools they keep their keen cutting edges.

THE BORCASE is made of matched hardwood, tongued and grooved; glued, pressed and nailed. A positive lock keeps out the rust and dust. Handsomely finished with two coats of water-proof shellac.

THE BORKIT is made of eight ounce slate colored duck, bound with braid. To prevent rust and dust the kit is lined with non-tarnishable green flannel. A strong web strap and heavily nickeled buckle keeps the kit snugly closed when not in use.

For the Home Craftsman

Readers of the Popular Science Monthly's Home Workshop pages will find Irwin Auger Bits in the handsome new box or kit just what they need for doing fine work.


A bit for every purpose will help you turn out clean, workmanlike jobs. Irwin Bits come in sets of six, ten and thirteen bits.

Carpenters and cabinetmakers use more Irwin Bits than any other bits made. For good work use the same bits used by professional tool users.



Do you know the names of the three major parts of a bit?—what the opening connecting the cutting edge with the twist is called?—what a *solid center* bit is? You will find these and scores of other questions answered in our book.

Every man who loves tools will want a copy of the interesting and useful book "How to Select, Use and Care for Bits." We will be glad to send you free a copy of this illustrated book.

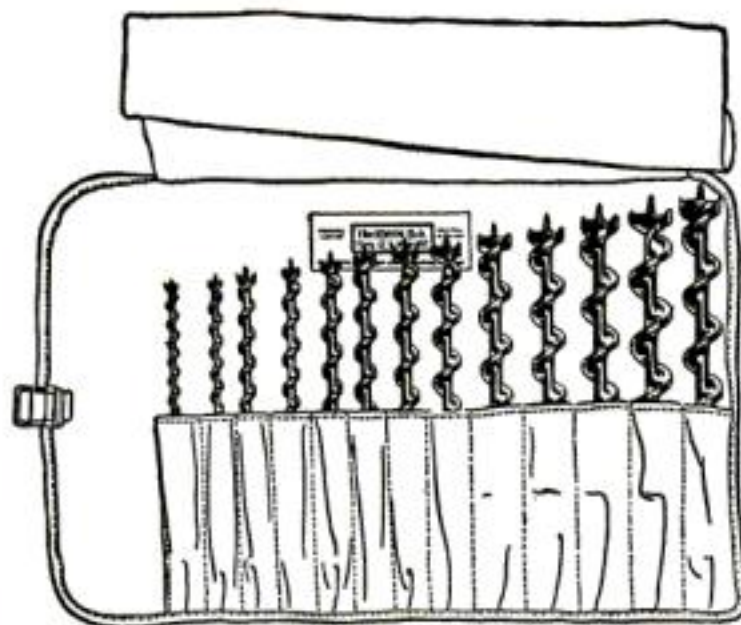

The New Irwin Borkit

Dealers: Your customers will want the Irwin Bit Sets in the handsome new boxes and kits. Attention arresting window and counter displays can be built around the new Irwin Borcase and Borkit. If you are stocking them, play them up strong. If you haven't seen the new Irwin Sets write us to-day for full information.

THE IRWIN AUGER BIT CO. WILMINGTON, OHIO.

Originators of the solid center principle and sole manufacturers of the genuine Irwin line of bits and Augers.



Cuts True
Clear Thru

Standardize

The IRWIN Bit
Reg. U.S. Pat. Office

on IRWIN



The IRWIN Bit
Reg. U.S. Pat. Office

"The Man of a Thousand Tools"

By Lorry Jacobs

DOES your daily work grow dull sometimes? Do you feel misplaced in the thing that you are doing? Would you like to find a healthful hobby that would bring you both recreation and additional income?

Then listen to this story of "The Man of a Thousand Tools," who spent 29 of his working years working at jobs that failed to interest him or bring him the joy of accomplishment. Clement Hopkins of New York did this—and then suddenly found the thing to which he had unknowingly been suited all his life—woodcarving. And he mastered it completely in the short time of three years.

For 29 years, the man now known as "The Man of a Thousand Tools" worked variously as an actor, a stage manager, and at the clerical work to which he was forced to retire when his health forbade his traveling. And he felt, more and more, that he must get relief from the sedentary work that occupied eight hours of every day. But he kept on, not realizing what was the matter with him, until a serious illness forced physicians to tell him that he must find an activity to occupy his spare hours—some sort of a hobby in which he could really feel an interest.

Began with a Few Chisels

Hopkins cast about vaguely. Then fingers communicated to his mind the fact that they wanted to be working with something. He immediately set out for the nearest tool store and the nearest five-, ten-, and fifteen-cent store. There he bought half a dozen carving tools and a cheap wooden frame.

There are some men who take naturally to tools. Hopkins always had an aptitude for doing things of a mechanical nature, but he did not regard this as anything unusual. So, with his carving tools, but no great enthusiasm, he set to work to try and embellish the simple frame he had bought. In a short time the homely piece of wood had taken on a graceful design that surprised his friends and Hopkins even more!

That was the start. Then followed a thorough study of the history of woodcarving; evenings spent in examining illustrations of the beautiful designs wrought in wood of other days; weeks spent in experimenting with the use of new tools he began to accumulate; and then, a real effort to emulate in beauty some of the more simple masterpieces he had been studying.

All that was three years ago. At that time, Hopkins could not tell a framing chisel from a fishtail gouge. Today he has a brilliant and remunerative future ahead of him as a woodcarver, knows the use of every woodcarving tool, and has an interest in life that has re-

"THE greatest thing my work has given me," says Clement Hopkins, expert woodcarver, "is the realization that there are probably thousands of boys who have no chance to allow their fingers to show their skill."

"My greatest dream is the establishment of a free school-workshop, where I can teach such boys a marvelous way of making a living"



The man of a thousand tools at work, and, above, a corner of one of his toolrooms

stored his health and given him a joy in living.

His equipment of tools runs into the thousands, ranging from chisels and gouges that will give an incision of the fineness of a hair, to huge tools with a 2-in. sweep.

He has sets upon sets of straight chisels and bent, fluters, parting tools, long and

short bent gouges, a hundred hammers, saws, mallets, planes, and a lathe for turning out round pieces to fit some intricate design. His tools fill three rooms and he has 38 toolchests.

To see Hopkins working in his little studio perched on the top floor of a typical dark-halled tenement in the outskirts of Greenwich Village, Manhattan, you would think

that he had spent his life working in his chosen profession. He has accomplished what seems to be a miracle in three short years.

Using all his spare time, Hopkins carved scores of frames, never two alike, and then turned his attention to triptychs, these shrinelike altar pieces of ecclesiastical design, with two doors that open and disclose the contents. To copy some of the medieval designs more perfectly, Hopkins even learned the art of gilding. And for these he found a ready market that helped pay for the tools he had collected.

Carving a \$1000 Chest

The harder he worked, the greater grew his ambition. Wondering what commercial value his work had, he took several pieces to a Fifth Avenue art dealer. The man was amazed that Hopkins had mastered the difficult art in so short a time without training. There, Hopkins noticed a fifteenth-century carved walnut chest. Making inquiry, he found that complete photographs of the chest were in a book in the Public Library. He secured a photograph and after several months of tedious labor, completed an exact replica, making each part in cheaper wood first, to be sure of himself. For the ornate hinges, side irons, and a big lock and key made of hand-forged iron work, he engaged the aid of artisans, who duplicated it to a nicety. Finished, the chest

sold for nearly a thousand dollars. Hopkins had another chest of white wood, also a replica, but that was for his own home.

Orders for triptychs and frames kept pouring in, some even coming from Europe. Finally came an order for a pulpit, which will far surpass anything Hopkins has ever attempted, with its symbolic and ecclesiastical figures to be done in high relief and its Gothic lettering. This completed, he will go on making furniture.

Yet he is the man who three years ago did not know what to do because his work did not give him the joy of living that makes life worth while!



The remarkable beauty and character of Mr. Hopkins' carving is revealed in this reproduction of an antique Italian walnut chest and, above, two triptychs

The Proper Finish Will Make Your Furniture Harmonize



Small odd pieces of modern furniture add greatly to the attractiveness of every home. You, yourself, can easily make them for your family. There is no particular trick to constructing porch swings, tables, telephone sets, etc.

Furniture, woodwork and floors of your home can be made to harmonize if a little taste is used in finishing them. You can easily refinish dingy, shabby, scratched wood. Our method involves practically no expense. All you need is a little time—a brush—and JOHNSON'S WOOD DYE.

and quickly, without a lap or a streak. It penetrates deeply, bringing out the beauty of the grain without raising it—dries in 4 hours and does not rub off or smudge.

JOHNSON'S WOOD DYE

Johnson's Wood Dye is made in fourteen beautiful shades, all of which may be easily lightened or darkened—full directions on every label.



In Wood Finishes you get just what you pay for. If you buy cheap brands you may be sure they are manufactured from cheap raw materials, cheap labor and the completed job will be a disappointment and the finish will not stand up.

The Johnson Line of Artistic Wood Finishes is complete—it includes Johnson's Wood Dye—Paste Wood Filler—Enamel and Undercoat—Permacote Wall Finish—Floor and Sani-Spar Varnish—Prepared Wax—and everything necessary for your furniture, floors and trim.



If you are building or remodeling you should have our book on refinishing. The finish of your floors and interior trim is a matter of great importance, for a beautiful piece of hard wood may be absolutely ruined with the improper finish, whereas an ordinary piece of wood is a pleasure to the eye if well finished.

FREE-This Book on Home Beautifying

This Book tells how to finish wood in artistic stained and enameled effects. Gives practical suggestions on making your home artistic, cheery and inviting. Tells just what materials to use and how to apply them. Includes color card—gives covering capacities, etc. Use coupon below.



S. C. JOHNSON & SON, Dept. P53,
RACINE, WIS. (Canadian Factory—Brantford)
Please send me free and postpaid your Instruction
Book on Home Beautifying and Wood Finishing.

The best dealer in paints here is.....

MY NAME.....

MY ADDRESS.....

CITY & STATE.....



Johnson's Wood Dye is very easy to apply—it goes on easily

Better Shop Methods

How Expert Mechanics Save Time and Labor



Broaching Lowers Costs in Many Machine Shop Jobs

BROACHING is often the quickest and most satisfactory way of finishing the interior surfaces of oddly shaped holes, and sometimes the only one.

Square, rectangular, and splined holes, used in automobile construction, are invariably made by the broaching process. While machine broaching pays only when done on a production basis, nevertheless, small broaches, such as are pushed through the job under a power or arbor press, are becoming more popular and more used every day.

No modern toolmaker's kit is complete if it does not contain a set of a few assorted square and rectangular broaches. Tool slots in boring bars and tool holders and square and rectangular holes in jigs and tool fixtures can be cut with small broaches that the average mechanic can easily make himself. A useful set of small broaches for the toolmaker is shown in the accompanying illustration. A good grade of carbon steel must be used for the broaches; a carbon content .90 to 1.10 is about right.

Designing and Making Broaches

In designing a broach, several things must be noted, such as the kind of metal to be worked, the thickness of the work and the amount of metal to be removed by the cutting teeth. Thin pieces require a broach with closely spaced teeth. The amount of metal removed decides the chip room and the metal to be cut determines the lip and clearance angles of the teeth.

The parts of a broach's anatomy are the pilot, which must be turned to a few thousandths of an inch smaller than the hole into which it is to enter; the body, which is tapered to allow each successive tooth to do its share of the cut, and the sizing portion, which usually contains about six teeth, all the same in size, their function being to finish the surface of the hole accurately to size. The head is made a few thousandths smaller than the sizing teeth and acts as a guide member in keeping the sizing teeth in perfect line while passing out through the hole. Whenever possible, broaches should be made with spiral teeth, as this type takes a shearing cut, eliminates chattering and digging in, and, as the spiral effect staggers the teeth on opposite sides, the broach works better in thin pieces.


After the broach blank has been shaped up to the proper size, it is centered on the lathe, the feed screw is geared to the desired pitch, and a tool, as shown, is used to cut the spiral on the corners of the broach, leaving a land at least 1/16 in. wide. It is then an easy matter to set up the blank broach in the vise on the shaper and cut the teeth to the proper angle by throwing the vise over to the angle of the marked spiral.

After the teeth have all been roughed out, the broach must be annealed to prevent the trouble caused by warping, which often spoils an otherwise good broach. The annealing takes out the internal strains of

By Joe V. Romig

the metal and softens it for the final finishing of the teeth, which is usually done with a fine file. Care must be exercised in obtaining the proper clearance angle of the cutting edge, which varies from 3 to 5 degrees. Blue paint is smeared on the land section before filing, so that it can easily be seen when the exact cutting edge has been reached.

The proper hardening and drawing of the temper determines the durability of the broach. A hard broach will break and a

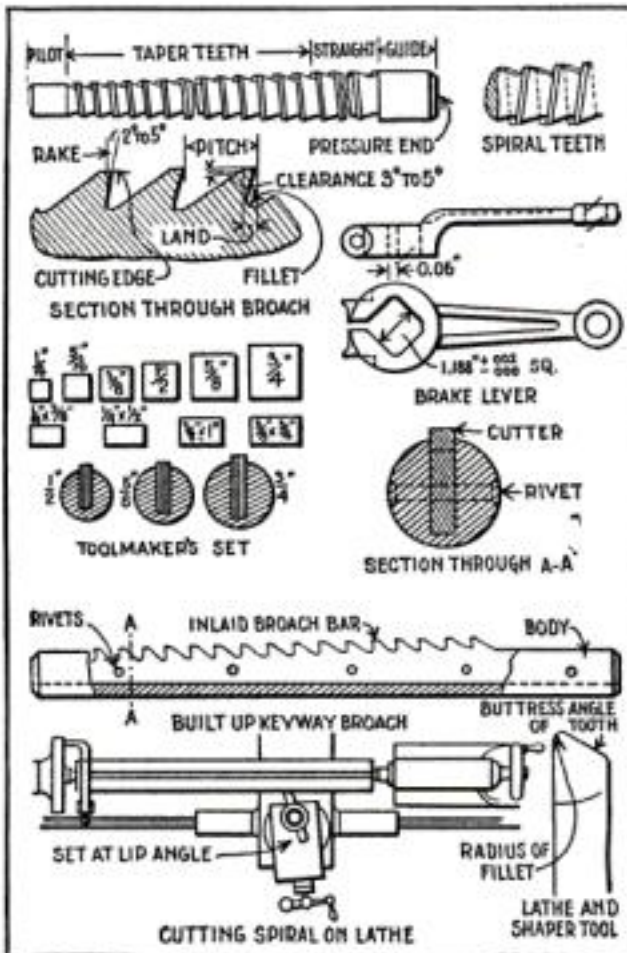

soft one will wear out quickly. An oil or gas furnace should be used in hardening so that the piece can be heated evenly to the proper temperature recommended by the steel company that supplies the steel. To heat a broach in an open coal fire invites ruin because of scaling and burning. If no other fire is available but a coal fire, protect the broach from the flames by first laying in several pieces of wood, and let them char thoroughly.

Care Needed in Tempering

In the quenching, too, much care is necessary. If the broach is cooled unevenly, it will warp. Upon withdrawing it from the furnace or fire, immerse it vertically in a tub of water and stir it around in small spirals, increasing in size until the piece has cooled. Test with a file for hardness and then shine up the lands of the teeth with emery cloth prior to drawing the temper.

Temper can be drawn on small broaches

in sand heated over a bunsen burner, or in the open flame of a bunsen burner. By drawing and quenching several times the most uniform results will be obtained. In each individual drawing, allow the heating to take place slowly, so that the heat will penetrate to the interior of the body. For general use a broach made of good carbon steel should be drawn to a medium straw color, or a little darker.

Broaches should not be used to shape and size rough cored holes, as the sand and scale will ruin the teeth at one passage. Rough or cored holes are first prepared by drifting them out with a solid drift, leaving just sufficient metal in the hole for the final sizing. Lard oil is an ideal lubricant for use in broaching; it finishes well and cuts freely.

An example of successful broaching is illustrated to show the practicability of broaching for saving labor and money when the quantity of work is sufficiently large to warrant the expense of making the broaches.

An automobile maker sublet a contract for the machining of several thousand brake levers to a small machine concern, with whom the writer was at that time connected in the capacity of machine superintendent. The designer of this part of the truck called on his print for a cored hole filed out to fit the squared ends of the brake shafts. When the lot of castings arrived, we found that the cores had evidently shrunk, as the holes were all about 1/32 in. too small.

Last Piece "Mikes" like the First

We decided at once to broach, and started that same day to drift out the scale and sand, while working on the broach itself. Broaching was done on a small power press, and one broach machined the whole lot of steel castings, the last hole looking and "miking" just the same as the first.


It is this exactness and perfection of machining duplicate work that makes broaching such a well liked and paying proposition. Broaching appeals to the manufacturer as a means of doing high class work quickly and cheaply with unskilled labor.

Some private sets of broaches I have seen included, besides the regular complement of square and rectangular shapes, round ones as well, and also small keyway broaches for cutting the keyways in small gears from 1/2 in. up to and including 1 in. in diameter. For the model builder and home workshop mechanic, a set of square and rectangular broaches will make for better and more accurate work.

Shims Make Erasing Shields

VERY thin shim stock, such as is used for liners for connecting-rod bearings, will make good erasing shields. Holes can be cut in it with a knife to permit the correcting of small details that could not be erased without damaging surrounding parts, even with the ordinary commercial shield.—JOHN KILIAN.

and Now—

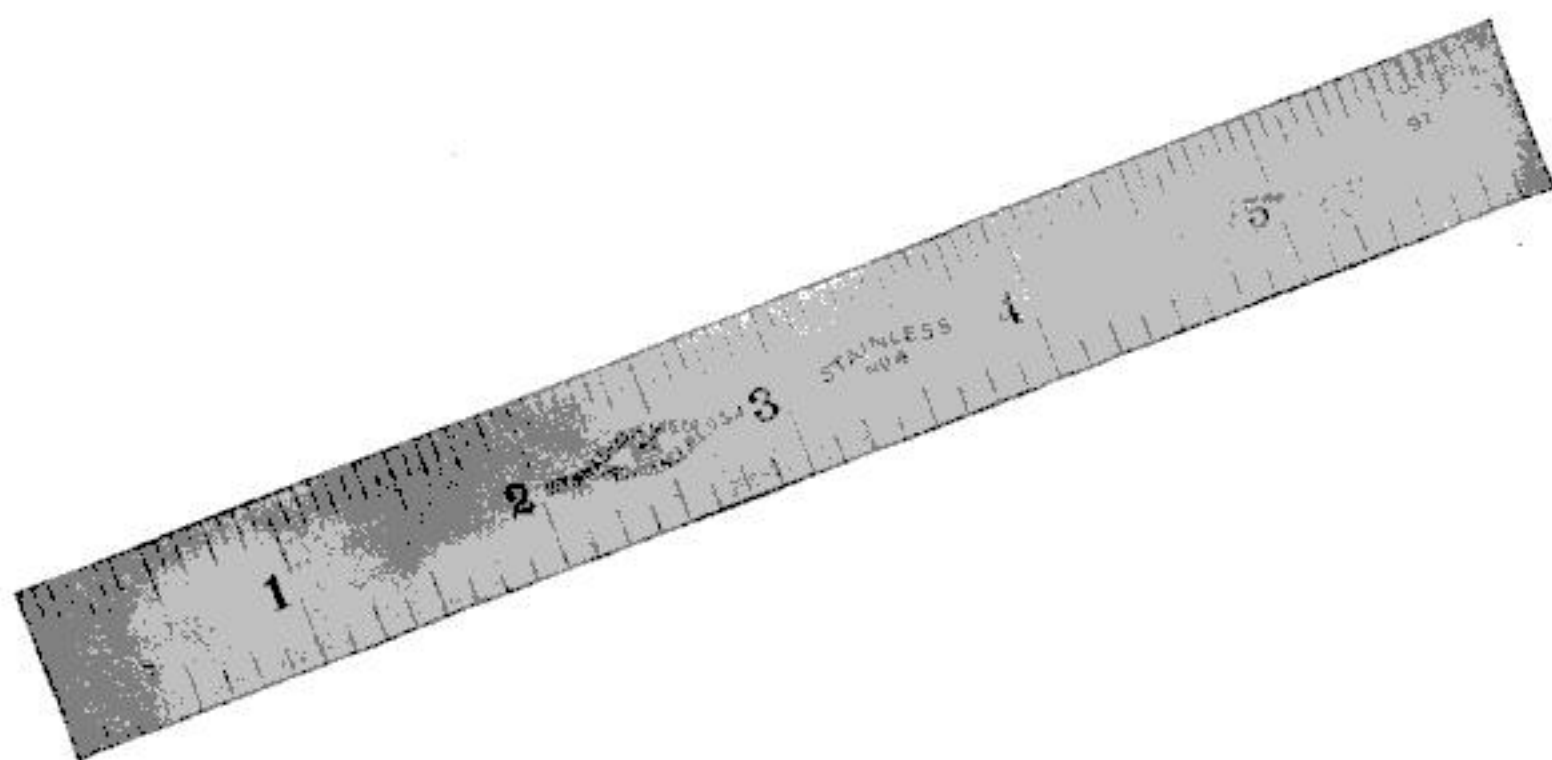

A Six Inch Rule (Pocket Size) of
STAINLESS STEEL

by

BROWN & SHARPE

RUST-PROOF—will not stain or discolor,
but will always retain its bright finish—
clean cut graduations in 8ths, 16ths,
32nds and 64ths, of the characteristic
Brown & Sharpe accuracy.

Get one from your dealer today
Ask for No. 350—You'll like it



BROWN & SHARPE MFG. CO.

Providence, R. I., U. S. A.

For Young, For Old, For Everybody



Remington Portable Typewriter

is the universal machine for personal writing. It has every quality demanded by the individual user.

Compact—fits in a case only four inches high.

Convenient—can be used anywhere; on your lap, if you wish.

Complete—with STANDARD KEYBOARD and other "big machine" conveniences.

It also resembles the big machines in efficiency, for don't forget it's a Remington—with every merit for which Remingtons are famous.

Sold by 2,500 dealers and Remington branches everywhere.

Write for our illustrated "For You, For Everybody". Address Dept. 67

REMINGTON TYPEWRITER COMPANY

374 Broadway, New York

Paragon Ribbons for Remington
Portable Typewriters. Made by
us. 50 cents each. \$5.00 a dozen




BETTER SHOP METHODS

Machinist Can Make His Own Angle Iron Pattern


By Henry S. Laraby

AN ANGLE iron of cast iron is generally recognized as the most accurate of all the angle iron family. It seldom changes when once it is thoroughly seasoned. Making it is much cheaper than to hog an angle iron from a block of steel, and is much less discouraging, especially if the steel happens to crack in hardening.

Although the making of a wooden pattern is somewhat of a mystery to many mechan-

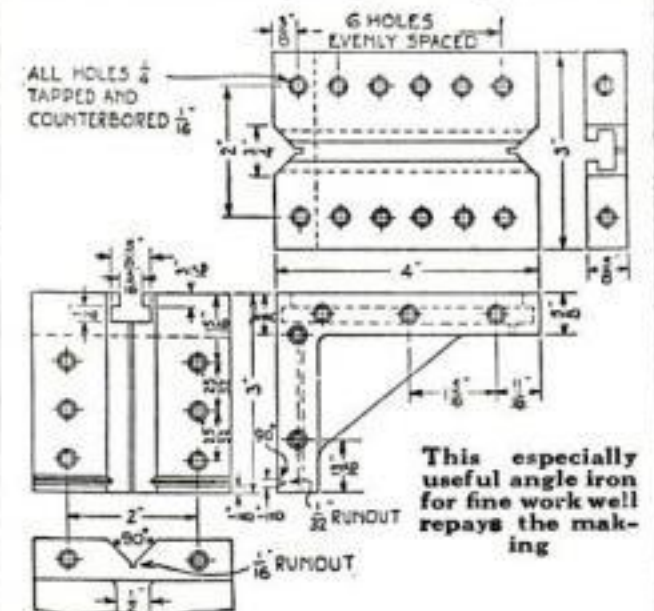

ics, it is really quite easy to provide one for this angle iron, and after the pattern is made, the cost of casting is small. I made a pattern at one time and sold the castings in the toolroom for four dollars each, and they cost me only 30 cents. The pattern has been simplified as much as possible and it is merely necessary to follow the dimensions without considering the allowance necessary for finish and shrinkage, which have

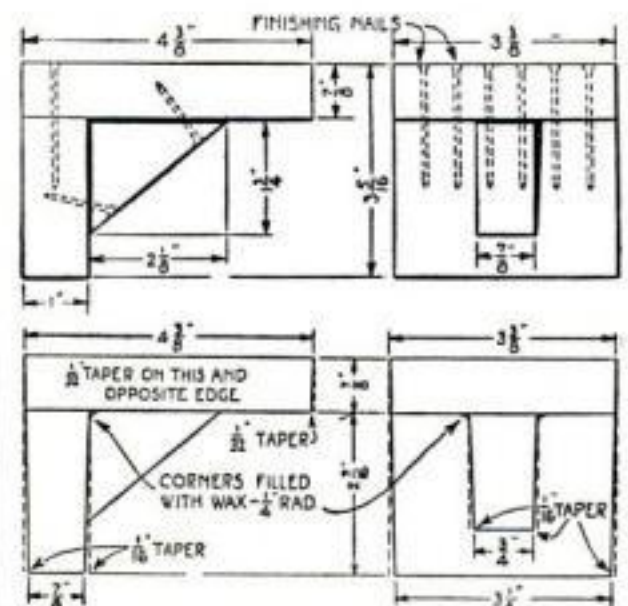

The simple pattern before and after providing the draft. The dimensions shown include the necessary shrinkage allowance

been taken care of in the drawing. The pattern is shown both before and after the draft is put on.

The heads of the nails are set below the surface of the wood and the pattern is sandpapered and given one coat of shellac. After this is dry, the pattern is again sandpapered. The nail holes and the corners are filled with wax and two more coats of shellac are applied, care being taken to allow each coat to dry thoroughly and to sandpaper the pattern after each coat. The pattern is then ready for the foundry. It is best to have the cast made in gray iron.

(Continued on page 86)

With **SARGENT** PLANES "making things" is pure delight!

Why, the job is half done when a fellow starts with tools as fine as these Sargent Planes. And it's easier to do the careful, finished work you can be proud of. See these planes at a dealer's to-day. Buy them and realize tool perfection!

Auto-Set Bench Plane with the new chromium steel cutter that keep an edge. So rigid it will not chatter on hard wood and knotty or other difficult surfaces, even when cutting across the grain. It may be adjusted quickly for coarse or fine cuts. The clamp, when replaced after removal, will always return to its original position. A fine, capable, all-round plane for your workshop.

Steel Pocket Plane and Steel Block Plane are light and indestructible. They are particularly handy for fitting corners, etc., and for the delicate finishing touches to your craftsmanship.

SARGENT & COMPANY

50 Water Street


New Haven, Conn.




He is using the Sargent Auto-Set Bench Plane in fitting a drawer. This plane will come into use more frequently than any other in your equipment. It is so sturdy it will do heavy work without complaining, but so handy it can be used on the finer jobs, too.



Sargent
Pocket Plane

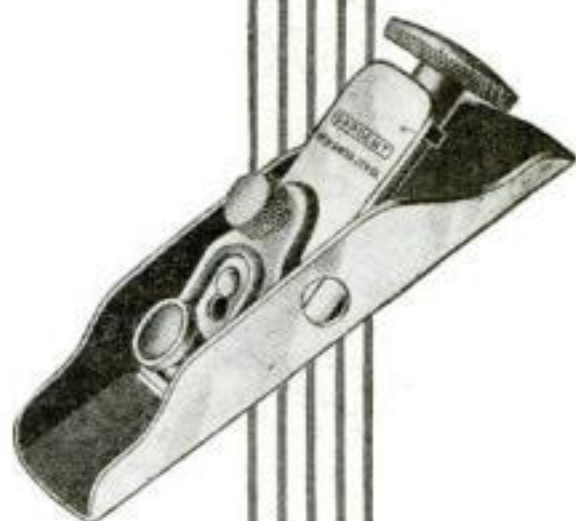

Sargent
Steel Block
Plane

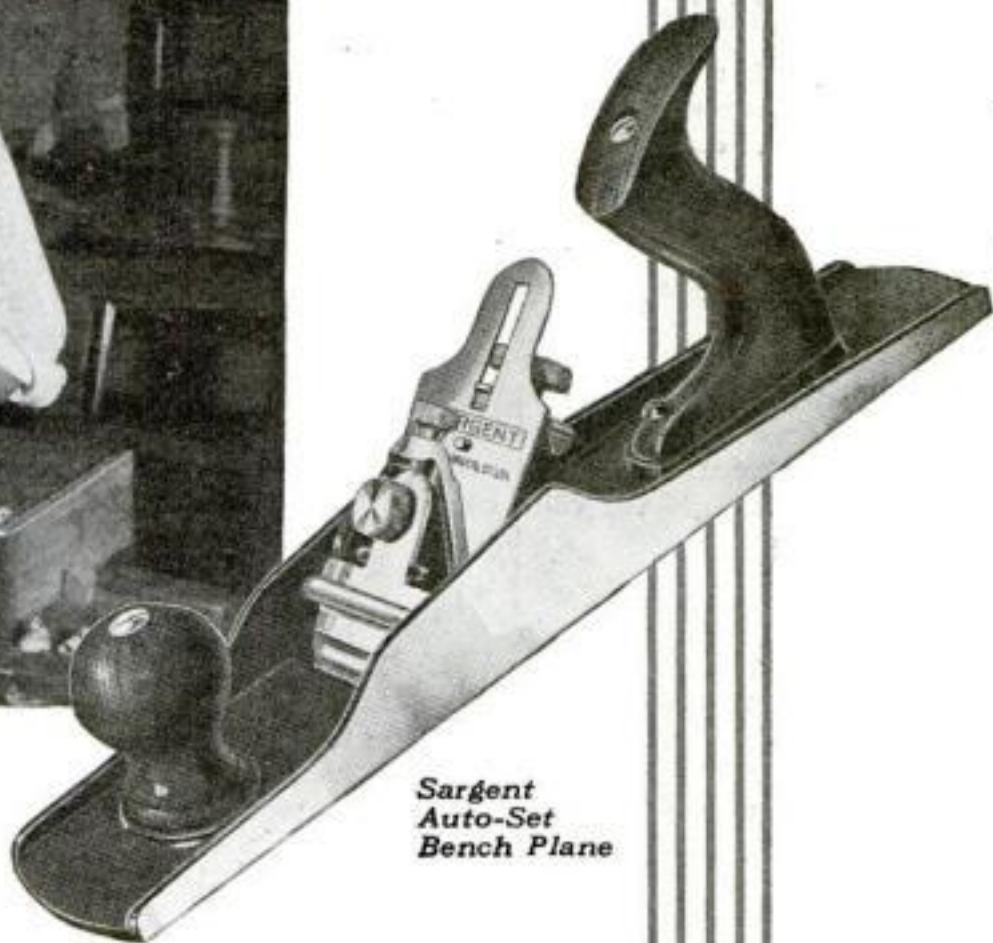

Sargent
Auto-Set
Bench Plane

SARGENT
Tools & Hardware



Five New Ways

To whiter, cleaner, safer teeth—all late discoveries

Dental science has been seeking ways to better tooth protection.

All old methods proved inadequate. Tooth troubles were constantly increasing. Very few escaped them. Beautiful teeth were seen less often than now.

Dental research found the causes, then evolved five new ways to correct them.

The chief enemy

The chief tooth enemy was found to be film—that viscous film you feel. It clings to teeth, enters crevices and stays.

Food stains, etc., discolor it. Then it forms dingy coats. Tartar is based on film. Most teeth are thus clouded more or less.

Film also holds food substance which ferments and forms acids. It holds the acids in contact with the teeth to cause decay. Germs breed by millions in it. They, with tartar, are the chief cause of pyorrhea.

Much left intact

Old ways of brushing left much of that film intact, to cloud the teeth and night and day threaten serious damage.

Two ways were found to fight that film. One acts to curdle film, one to remove it, and without any harmful

scouring. Able authorities proved those methods effective. They were embodied in a tooth paste called Pepsodent, and dentists the world over began to urge its use.

Other essentials

Other effects were found necessary, and ways were discovered to bring them. All are now embodied in Pepsodent.

Pepsodent stimulates the salivary flow—Nature's great tooth-protector.

It multiplies the alkalinity of the saliva. That is there to neutralize mouth acids, the cause of tooth decay.

It multiplies the starch digestant in the saliva. That is there to digest starch deposits on teeth which may otherwise ferment and form acids.

It polishes the teeth so film less easily adheres.

Prettier teeth came to millions

One result is prettier teeth. You see them everywhere—teeth you envy, maybe. But that is only a sign of cleaner, safer teeth. Film-coats, acids and deposits are effectively combated.

Send the coupon for a 10-Day Tube. Note how clean the teeth feel after using. Mark the absence of the viscous film. See how teeth whiten as the film-coats disappear.

Cut out the coupon now.

Pepsodent PAT. OFF.
REG. U.S.

The New-Day Dentifrice

A scientific film combatant, which whitens, cleans and protects the teeth without the use of harmful grit. Now advised by leading dentists the world over.

10-Day Tube Free 1014

THE PEPSODENT COMPANY,
Dept. 726, 1104 S. Wabash Ave., Chicago, Ill.

Mail 10-day tube of Pepsodent to


Only one tube to a family.

BETTER SHOP METHODS

Machinist Can Make Angle Iron

(Continued from page 84)

The casting should be milled on the inside and worked off on the outside in a shaper and laid aside for a week or more to

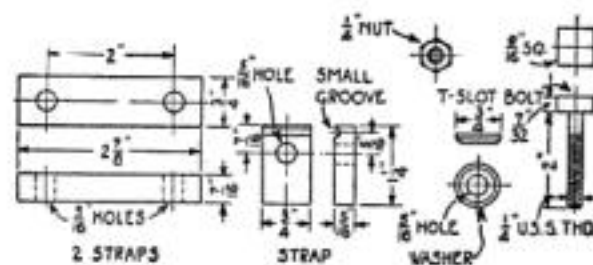

Details of the straps and bolts used with the angle iron

season. It should finally be ground all over, except, of course, the inside. If the gray iron is close grained, it will hardly be possible to tell the piece from steel when finished.


The small V may seem superfluous to some mechanics, but for any of the finer grades of work, such as gage or tool making, it will prove invaluable, as when it is needed, it is needed badly. The V on the top edge is for holding bosses and the like.

Some machinists may consider the dimensions I have given too light for average work, although they are those I have used for my own angle iron. It is, of course, a simple matter to make the pattern a little heavier; both legs, for instance, can be 1 in. thick, the bracket $\frac{3}{8}$ in., and the finished dimensions in proportion.


Large Wrenches from Discarded Ford Radius Rods

RUGGED and substantial wrenches for tightening or loosening the nuts holding spring clips and automobile wheels may be made in a repair shop—where many of them are required—out of bent and broken front radius rods from Ford cars.

An 18-in. section of the radius rod, with the eye at the end, is cut off and the end is

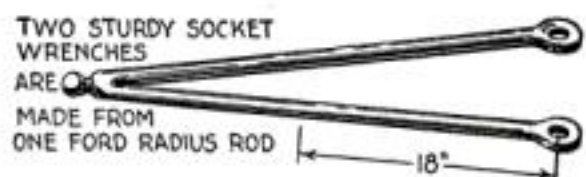

HEAT END OF ROD RED HOT AND PLUNGE IN BRINE AFTER SHAPING

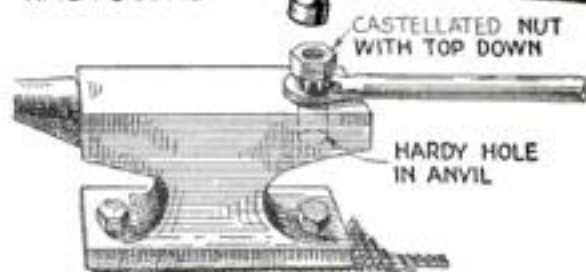

Powerful tools for heavy work are quickly forged from old auto parts

heated red. The castellated head of a nut is started in the eye after the red hot end of the rod has been placed over the hardy hole in the anvil, and the whole nut is driven through. While still hot the end is plunged into brine.

The whole process of converting a radius rod into a wrench of this type takes less than ten minutes, and the resulting tool stands up under the hardest usage.—F.A.Y.

Creative Work demands NICHOLSON FILES




CONFIDENCE in your tools is the first step toward a good job—whatever you're attempting to make or repair.

That Nicholson Files are known and used by thousands of mechanics and skilled artisans in every civilized country, is proof positive that they have earned the confidence of men who know good tools.

Nicholson Files are scientifically tempered to hold their cutting edge under hard service. They feel right in the hand, cut right from the start, and save time and labor at the work bench.

When you tell your dealer you **MUST** have a NICHOLSON, you'll get the file you want.

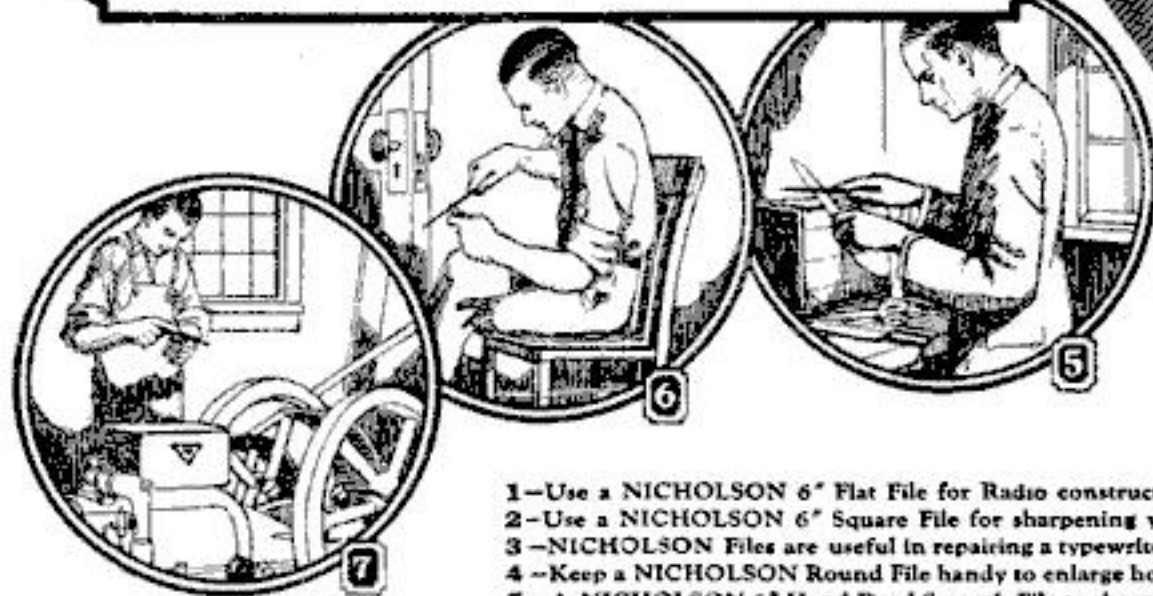

- 1—Use a NICHOLSON 6" Flat File for Radio construction.
- 2—Use a NICHOLSON 6" Square File for sharpening your tools.
- 3—NICHOLSON Files are useful in repairing a typewriter.
- 4—Keep a NICHOLSON Round File handy to enlarge holes in metal or wood.
- 5—A NICHOLSON 6" Hand Dead Smooth File to sharpen knives and shears.
- 6—A NICHOLSON Warding File makes a balky key turn the lock.
- 7—A NICHOLSON Tungsten Point File is handy to have about when a gasoline engine shows ignition troubles.

NICHOLSON FILE CO.

PROVIDENCE, R.I., U.S.A.

He smokes a meerschaum pipe fifty years old

**Packed with Edgeworth he
thinks no other pipe can
compare with it**

We have run on the case of three generations of pipe smokers preferring the meerschaum pipe to all other pipes. Not only that, but all three generations smoked the same meerschaum pipe (in turn, may we be allowed to add).

For further details we refer directly to the present owner of the ancient pipe.

"Dear Sirs," he wrote us, "I have a meerschaum pipe originally purchased and smoked by my grandfather. When he died, he willed it to my father, who smoked it continually throughout his lifetime.



"When the pipe came to me, I was a little dubious about accepting the family responsibility of keeping up the tradition. I tried several brands of tobacco in the pipe and they all made me sick. Then someone suggested Edgeworth.

"From that day to this I have smoked no other

tobacco—no other pipe.

"Give me the old family meerschaum and a little blue can of Edgeworth and I can get all the enjoyment out of smoking there is any time of day or night.

"Perhaps I'm prejudiced, but that's the way I feel about pipe smoking. And that's the way I intend to feel as long as you continue to make Edgeworth."

Well, we can reassure our correspondent on that point, for we intend to go on making Edgeworth just as long as there are smokers who would give up smoking if they couldn't get Edgeworth.

And we intend to go on making friends for Edgeworth by sending out more free samples.

So if you haven't tried Edgeworth, send us your name and address and we will immediately forward to you generous helpings of both Edgeworth Plug Slice and Ready-Rubbed.

For the free samples, address Larus & Brother Company, 59 South 21st Street, Richmond, Va. If you will also include the name and address of your tobacco dealer, it will make it easier for you to get Edgeworth regularly if you should like it.


To Retail Tobacco Merchants: If your jobber cannot supply you with Edgeworth, Larus & Brother Company will gladly send you prepaid by parcel post a one- or two-dozen carton of any size of Edgeworth Plug Slice or Ready-Rubbed for the same price you would pay the jobber.

BETTER SHOP METHODS

Chassis Frame Converted into Strong Shop Truck

A SLIGHTLY bent and otherwise useless auto chassis will serve for the frame of a shop truck. Use solid steel shafting for the axles and clamp them to the under side of the frame, as shown. Handles may be provided at the rear so that the truck can be pushed back and forth. It is intended mainly for use along alleys and bins, where the track does not turn to the right or left.

Planks 2 in. thick are fastened to the frame to serve as a bottom for the truck.

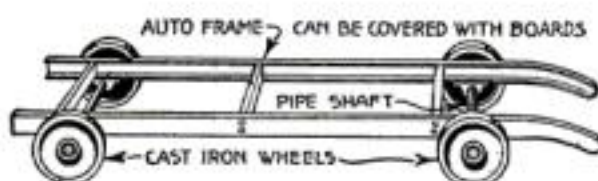


A truck for heavy work that will stand unlimited abuse

This is done by drilling holes in the channel iron and riveting on the boards. The wheels can be provided with solid rubber tires if the noise of the cast iron wheels is undesirable.—DALE R. VAN HORN.

Running Solder in Strips

IN THE small shop, where expenses must be kept down, it is customary to buy solder in its cheapest form—the pound bar. There are many jobs, however, that could be executed more easily if the solder were in the form of long, narrow strips similar to the higher priced commercial wire solder.

To make such strips it is merely necessary to use a simple cast iron ladle with several



Shopmade wire solder


small holes drilled through the bottom, close to one of the sides. The ladle is tilted back a trifle and half filled with molten solder in such a way that the

solder will not run out. It is then carried over a smooth iron plate and turned so that the solder runs out of the holes and forms long, narrow strips, as shown. These harden immediately upon striking the cold iron and can be removed as soon as they are poured.—C. M. WILCOX.

Marking Holes to Be Bored

A MACHINE shop making up some plates that had to be drilled with a large number of holes, but that could not be conveniently handled in a drill jig, used the special marking punch illustrated.

The tool was turned from cold rolled steel and the V marking edge was made the diameter of the holes that were to be drilled. The center extends beyond this edge and serves for locating the punch accurately. The tool was tempered, so that the circumference of the holes to be drilled could be marked distinctly after their centers had been fixed with a prickpunch.—L. S. R.



Special punch for drilling



Clearness of Tone

sensitiveness in receiving signals over a wide range, comfort, and adjustability are the distinguishing characteristics of the

Stromberg-Carlson Radio Headset

Made by a firm which has devoted 8 years to the manufacture of radio apparatus, backed by 28 years' experience in the manufacture of high grade telephone equipment.

The forked cord construction permits the separation of the receivers so that two observers may "listen in" simultaneously.

Order Stromberg-Carlson apparatus through your electrical merchandise dealer or write for free bulletin No. 1029-P. S. describing exclusive Stromberg-Carlson features.

**STROMBERG-CARLSON
TELEPHONE MFG. CO.**
ROCHESTER, N. Y.



ATKINS

SILVER STEEL

SAWS



The Symbol of
Saw Value

Non-Breakable Hack Saw Blades Cut Faster, Easier and Do Not Break

Put an Atkins Non-Breakable Blade in your hack saw frame, and you'll feel the difference at once. It will saw the toughest metal much faster and easier than ordinary blades, hold its cutting edge longer, and will not break.

There's a reason. These blades are made of selected steel, and are hardened and tempered by an exclusive gas-and-oil process, which gives a hard, keen cutting edge and a tough, flexible body to the blade.

You can eliminate losses of time and money due to breakage of brittle blades, by using Atkins Non-Breakable Hack Saw Blades. Prove it for yourself. Send ten cents and tell us what metal you want to cut, and we'll send you a sample 8 or 10 inch blade that will out-cut and out-last any other blade.



Atkins No. 10 "Easy Grip" Hack Saw Frame. Adjustable from 8 to 12 inch blades

"A Perfect Saw for Every Purpose"

No matter what kind of a saw you require—hack saw, hand saw, back saw, compass saw, keyhole saw, cross-cut saw, circular saw, buck saw, meat saw, pruning saw, portable drag saw machine, or in fact, any saw for any wood or metal cutting purpose—Atkins offers you a saw that will do the work quicker, better and easier.

Atkins Hand Saw
No. 53



The famous "Silver Steel" used exclusively in Atkins Saws, is the highest grade saw steel made. It takes a keener edge, cuts faster, runs easier, stays sharp longer and needs less filing to keep it in shape, than any other saw.


The name Atkins on a saw stands for the utmost in saw value. It has won that enviable reputation because at the bench, in the machine shop or wherever Atkins Saws have been used, they have proved to be the best money can buy.

E. C. ATKINS & CO., Inc.

Dept. D-20

INDIANAPOLIS, IND.

Makers of "Silver Steel" Saws and Tools sold by Leading Hardware Dealers and Jobbers. Mill Supply Houses and Factory Branches all over the world

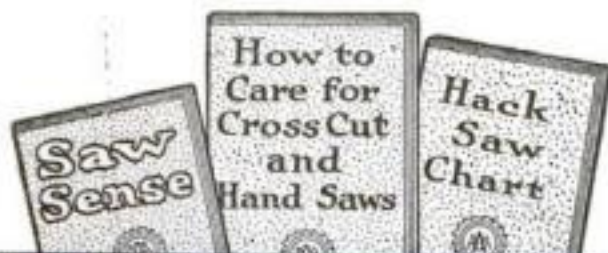

Get These FREE Books on Saws


"Saw Sense" shows you the best saw for every use, tells how to test and file saws and gives helpful tables and facts on building work.

"Care of Saws" explains in detail the use and care of hand saws and cross-cut saws.

"Hack Saw Chart" shows the correct hack saw blade to use for each metal-cutting job.

To get these free books, write your name, address and dealer's name on the margin of this page and mail it to us to-day.

"Saws in the Shop" Sent Free

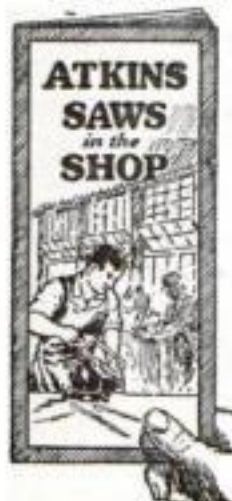

This book is full of helpful shop hints, and tables. Worth dollars to any saw user. It shows the right saw for every purpose and contains suggestions that will save you time, energy and money. Write us for your copy, NOW.

Service

"I had six honest serving men,
(They taught me all I knew);
Their names are WHAT and WHY and WHEN,
and HOW and WHERE and WHO." (LORD DUNSANY)

WHAT was the Declaration of London?

WHAT are consols?

WHY does the date for Easter vary
from year to year?

WHEN and by whom was the great
pyramid of Cheops built?

HOW can you distinguish a malarial
mosquito?

WHERE is Canberra? Zeebrugge?
Delhi?

WHO was Mother Bunch? Millboy
of the Slashes?

Are these "six men" serving you too?
Give them an opportunity
by placing

WEBSTER'S NEW INTERNATIONAL DICTIONARY



in your home, office, school, club, shop, library. This "Supreme Authority" in all knowledge offers service, immediate, constant, lasting, trustworthy. Answers all kinds of questions. A century of developing, enlarging, and perfecting under exacting care and highest scholarship insures accuracy, completeness, compactness, authority.

The name Merriam on Webster's Dictionaries has a like significance to that of the government's mark on a coin. The New International is the final authority for the Supreme Courts and the Government Printing Office at Washington.

Write for a sample page of the New Words, specimen of Regular and India Papers, also booklet "You are the Jury," prices, etc. To those naming Popular Science Monthly we will send free a set of Pocket Maps.

G. & C. MERRIAM COMPANY
Springfield, Mass., U. S. A.
Established 1831

Name

Address

P. S. M.

BETTER SHOP METHODS

Making a Small Sheet Metal Punch Press

WORK often done on sensitive drill presses, such as drilling rivet holes in thin sheet metal, could be accomplished more quickly and cheaply on a light punch press. Also, in the experimental departments and in the model building workshops of amateur mechanics, a small punch press is a handy tool.

A punch can be made with little trouble if square bar stock is used for a frame. For punching sheet stock up to $\frac{1}{8}$ in. thick the power of a heavy hammer blow is sufficient; this does away with the need for cams or toggles.

The main frame of the punch press is made of two $1\frac{1}{4}$ -in. square pieces of steel connected with two $\frac{5}{8}$ -in. cap screws, which run through the two round pillars, as shown. The pillars are turned and drilled out of cold rolled steel shafting.

The bottom part of the frame is mounted on an iron base, which is secured to the workbench by lag screws.

While individual punches are usually necessary, a single piece will answer for the dies. This die plate, made of tool steel, is fastened to lower member of the frame with a $\frac{1}{2}$ -in. flat head machine screw. It is indexed by means of a small index pin. In making this die plate, drill all the index holes as accurately as possible, clamp the die plate on the frame, and by using a sharp center punch in the punch holder, mark off the location of the holes; then drill and ream them to actual size.

Square, triangular, or any shaped holes can be made in the plate. A $\frac{1}{2}$ -in. hole central with the punch will allow the

blanks to fall through. The upper part of the frame is mounted squarely on the pillars in line with the lower part and is slotted for the adjustable guide bolt. It also is drilled on the forward end for the $\frac{1}{8}$ -in. punch holder spindle. This punch holder is flattened on its front face and is held from turning by a $\frac{5}{16}$ -in. screw and jam nut. On the punch holder is a special collar, which carries a thread for the punch retaining screw and also serves to prevent the punch holder from flying out of its hole.

A rather heavy spring is placed between the conical head of the punch holder and the frame top. It cushions the blow after the punch has gone through the metal and returns the punch and spindle to their upper position.



To the side of the upper frame is fastened a sheet metal stripper, which holds the metal down when the punch is being drawn up through the punched hole.

An adjustable guide is used to punch a line of holes equally distant from the edge of a plate. This can be removed so that there will be

a total clearance of $3\frac{1}{2}$ in.

The hammer used to operate the punch should weigh about 5 lbs. Punches are made of $\frac{3}{8}$ -in. drill rod suitably hardened and drawn. The die plate is machined up and also hardened and drawn; it should be a good grade of carbon tool steel.

While this is a simple piece of mechanism to build, it will prove a valuable tool and will be appreciated by the workmen because of its small size and large capacity for work.

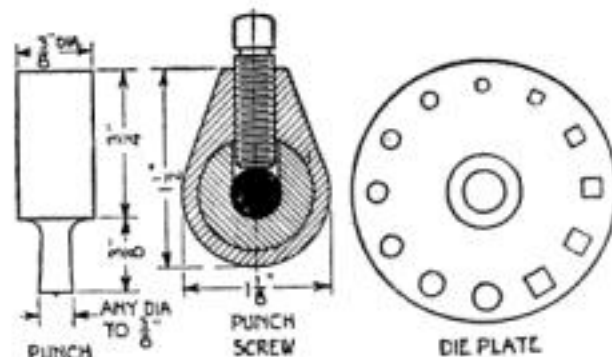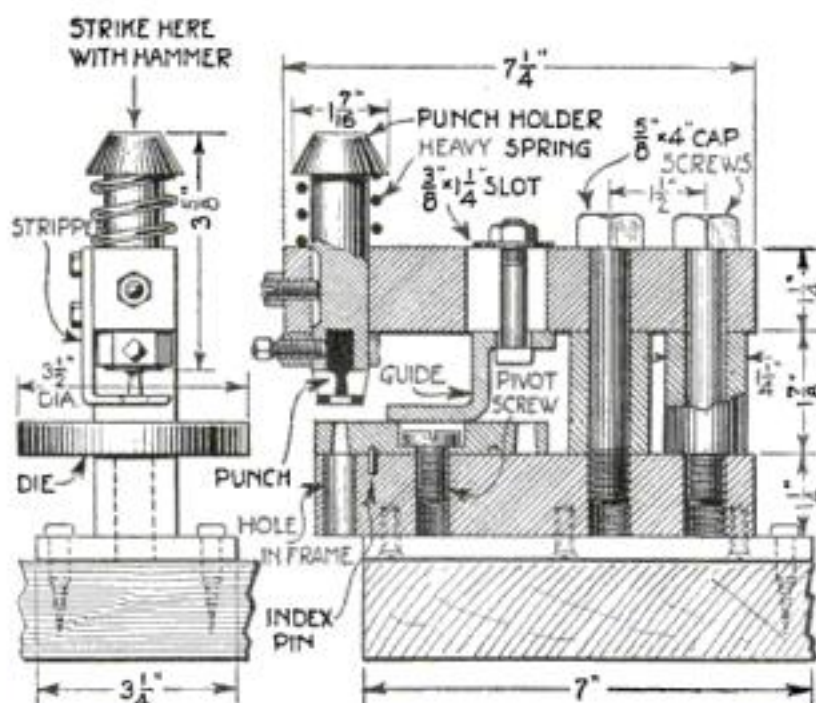


How this useful light punch press is put together, and details of the punch, punch screw, and die plate

Leather Strip Prevents Screw Jamming


IT IS sometimes necessary to make a cap similar to that shown in the illustration, the outside having to be turned up smooth in a lathe. Where there are quantities to do, make an arbor to fit on, or in, the spindle of the lathe. Where there is but one or two to make, chuck a piece of scrap cast iron in the lathe chuck and make a temporary arbor.

Place a narrow strip of leather around the arbor between the shoulder on the arbor



and the face of the cap. Then, when the job is done, pull out the leather and the cap can be unscrewed with the fingers. This method prevents the pressure of the cut from forcing the cap against the shoulder of the arbor so tightly that it is difficult to remove without marring or damaging it.

Be sure to use a strip of leather, not a collar or ring, so that one end can be pried up and the strip taken off easily.—W. D. T.

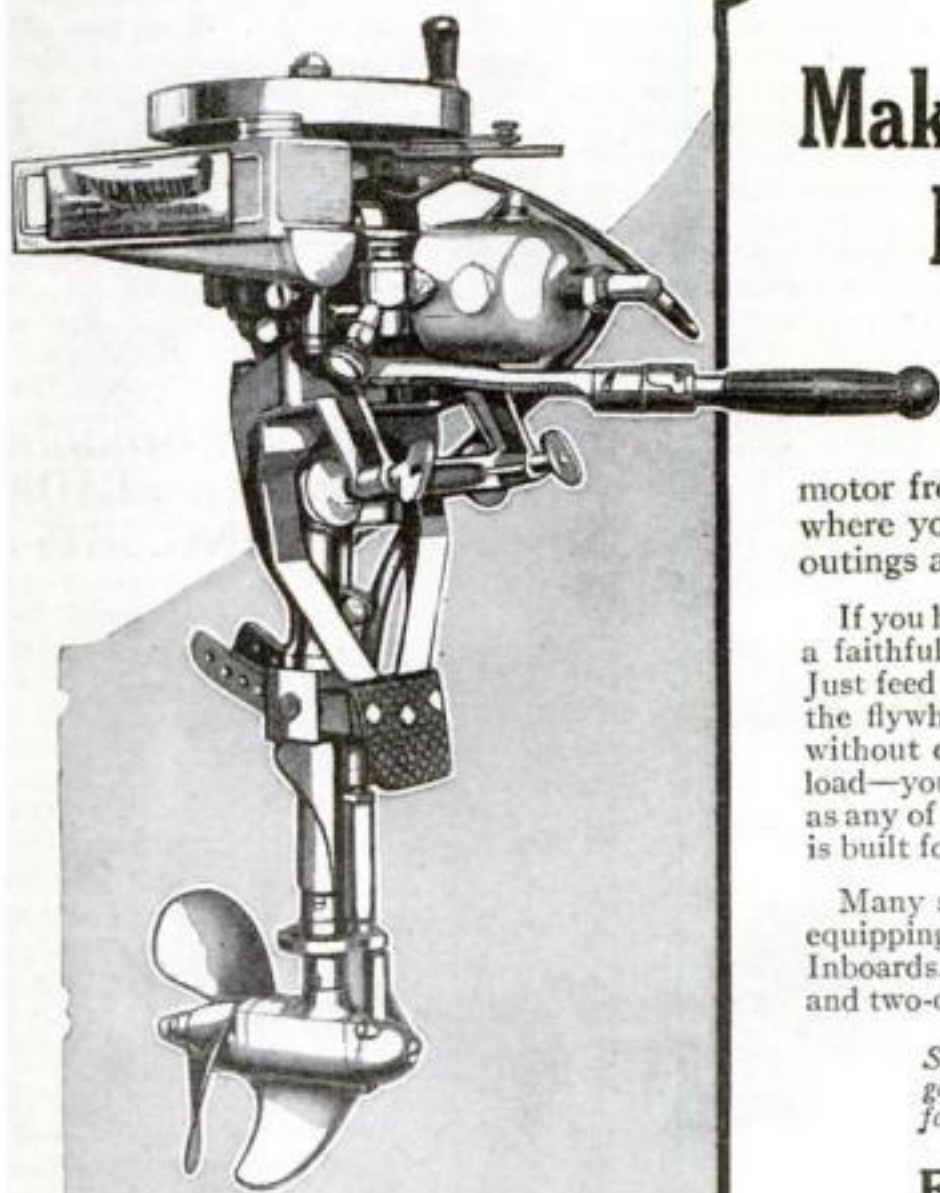

Make Your '23 Vacations Evinrude Outings

YOU men, whose happiest hours are spent with rod and gun—you, whose families "rough it" each summer at the waterside, camping, bathing, picnicking—you, who motor from lake to lake, fully equipped to "week-end" where you choose—now is the time to plan this year's outings around your Evinrude.

If you have ever used or owned an Evinrude you know what a faithful vacation pal this husky little outboard motor is. Just feed it a quarter's worth of "gas" and oil, give a fling to the flywheel and you're all set for a twenty-five mile trip, without oar-work. No need to worry about the size of the load—your Evinrude has plenty of power and speed. And, as any of the 150,000 owners will tell you, a genuine Evinrude is built for ten years of dependable service.

Many sportsmen who prefer a permanent installation are equipping their rowboats, canoes and launches with Evinrude Inboards. Easily installed, light and compact, both the one- and two-cylinder Inboards are ideal for small-boat power.

See the genuine Evinrude models at your sporting goods or hardware dealer's. There's an Evinrude for every small-boat use. Or write for free catalog.

EVINRUDE MOTOR CO.
125 Evinrude Block, Milwaukee, Wis.


DISTRIBUTORS:

69 Cortlandt St., New York, N. Y.
780 Commonwealth Ave., Boston, Mass.
119 Broadway, Oakland, Cal.
211 Morrison St., Portland, Ore.

Evinrude Inboard Motors



Single Cylinder

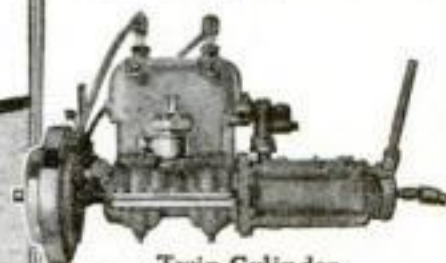

Twin Cylinder

Especially fitted for use in canoes. Develops speed of 12 miles per hour in 18 foot canoe. Both models have Evinrude built-in flywheel magneto.



EVINRUDE

WURLITZER
100 YEARS OF AMERICAN INSTRUMENT MAKING

Any Musical Instrument
On Trial

Easy Payments
A few cents a day will pay. Instruments and complete outfits at factory prices direct to you.

Send for New Catalog
Illustrated in Colors



The Rudolph Wurlitzer Co., Dept. 1783
117 E. 4th St., Cincinnati — 329 So. Wabash Ave., Chicago
120 W. 42nd St., New York — 250 Stockton St., San Francisco
Send me your new catalog, which illustrates and describes every known musical instrument, many of them shown in full colors, all at lowest factory prices. Also tell me how I may have any instrument on a week's trial in my own home at your expense and without obligation, and may pay for it on your special easy payment plan.

Name _____

Address _____

(State instrument in which you are especially interested)
Copyright 1932, The Rudolph Wurlitzer Co.


BETTER SHOP METHODS

Attachment Cuts Worms and Keyways in the Lathe

By James Ellis

THE popularity of worm and wheel reduction units among designers of various classes of machinery has made it necessary for our shop to make a great many worms at various times, and we felt the need of a process more efficient than chasing, yet not requiring costly equipment. The writer therefore designed the attachment illustrated. Since it was built, other uses have been found for it that are almost as valuable as that for which it was designed.

The device is simply a milling attachment for the lathe. The spindle is arranged to take a small end mill the shape of the thread to be cut, and the lathe is geared for the correct lead, as in chasing. Power for the cutter is provided by an electric drill

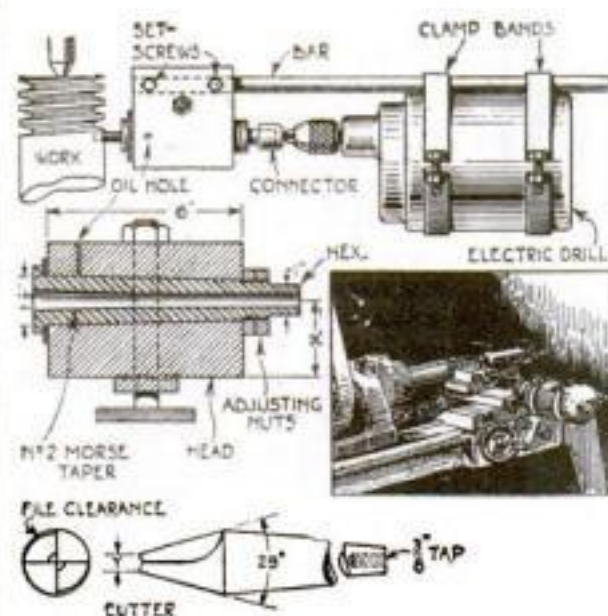

This small milling attachment, with its motor, is mounted on the compound rest of the lathe

clamped to a bar. The spindle is connected with the cutter spindle with a small universal joint. The average electric drill found in machine shops and garages has ample power for this work.

The head of the attachment is cast iron. It is provided with a key to fit the slot in the compound rest of the lathe. The distance X is made to fit the lathe to be used, the spindle of the attachment must be the same height as the lathe spindle. The type of bearing for the spindle may be varied to suit the builder, but a tapered bearing as shown is probably the best if carefully made, as it permits quick and accurate adjustments and at the same time is very rigid. A steel or bronze washer is doweled to the head and behind it are several washers of thin metal or paper, which are taken out when wear occurs to let the spindle go deeper into the tapered hole. On the other end of the spindle two adjusting nuts are provided.

A hole is drilled to take the 1-in. bar to which the electric drill is clamped. Set-screws hold the bar in place. A hole for a large headed bolt to fasten the attachment to the tool block of the lathe is drilled close to the center of the casting. The steel spindle has a shoulder on one end to take the end thrust and is threaded at the other for the adjusting nuts. The hole in it is bored to fit a No. 2 Morse taper shank and a 7/16-in. hole is drilled through to take a draw-in bolt with a thin head for securing the cutter. The back end of the spindle is

(Continued on page 94)



This Combination Completes any RADIO RECEIVING SET



TO own a good receiving set without Magnavox equipment, is like having your house properly wired and then using only small, feeble candle-power lamps in the sockets!

Whether placed in the average living room or large dance hall, Magnavox Radio floods the desired area with clear, resonant music or speech—its volume perfectly controlled from the Magnavox Power Amplifier constructed specially for it.

Combination R-3 Reproducer and 2 stage Power Amplifier (as illustrated).

R-2 Magnavox Reproducer with 18-inch horn: the utmost in amplifying power, for store demonstration, large audiences, dance halls, etc.

R-3 Magnavox Reproducer with 14-inch curvex horn: ideal for homes, offices, etc.

Model C Magnavox Power Amplifier insures getting the largest possible power input for your Magnavox Reproducer. 2 stage; 3 stage.

Magnavox Products can be had of good dealers everywhere.

The Magnavox Co.,
Oakland, California


New York: 370 Seventh Avenue

Write for booklet illustrating and describing the

MAGNAVOX
Radio
The Power Amplifier
and Reproducer Supreme

Tycos Temperature Control

*You Hear Famous Artists—
Thanks to the "Sixth Sense"*

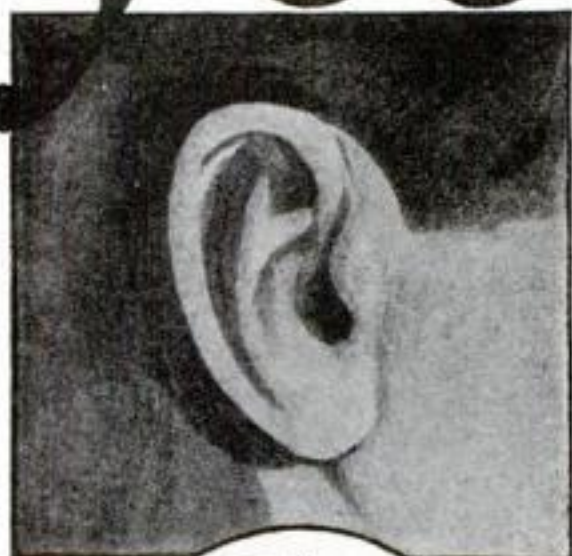

The SIX SENSES

Seeing ~
Feeling ~
Hearing ~
Smelling ~
Tasting ~
and ~ ~
Tycos
Temperature
Control

PLACE a record on your phonograph, drop the needle into place and the glorious tones of a famed tenor fairly shake the walls, the soft melody of a woman's voice charms the twilight, or the machine recreates the sound of violin or piano. You perceive these things by the sense of hearing, to be sure. But, behind the miracle that reproduces the sound waves, lie years of past toil and present accuracy in the perfection of every detail of the phonograph and record. Consider the record itself. It is a tough, elastic substance, composed of certain compounds that must be accurately blended. In this process, heat is employed. The control of this temperature must be exact if the finished "blank" is to prove properly susceptible to reproducing the sound waves when it is pressed by the master record. Behind the making of this master record itself—behind every step in its plating and electro-

plating, clear back to its production as a plaster cast of the original wax impression of the original harmony, the control of temperature—the "sixth sense"—plays its silent but vitally important part. The record of Tycos Temperature Indicating, Recording and Controlling Instruments furnish the means whereby this "sixth sense" has become as much a part of the everyday industrial world as the sense of hearing itself. The records you listen to are perfect because the records of the Tycos Instruments that controlled the temperatures employed in their physical production were perfect.

Listen, then, to the voice of American Industries—the voice that proclaims the 8,000 varieties of Tycos Temperature Indicating, Recording and Controlling Instruments as the standard of accuracy. Their record extends over years of usage—in conditions that parallel your industry.

Manufacturers

What is your problem of applying this "sixth sense" to your plant? What do you make? Write us and literature on any instrument or type of instrument will be sent you promptly. Tycos experts are ready to advise on its application to your plant.

Tycos in the Home

Tycos Wall Thermometers

To help you maintain a temperature in your house conducive to good health.

Tycos Quality Compasses

To show you the right way in unfamiliar country.

Tycos Fever Thermometers

A necessity in every home.

Tycos Stormguide

Forecasts the weather twenty-four hours ahead with dependable accuracy.

Tycos Hygrometer

To enable you to keep the humidity of the atmosphere in your home correct at all times.

Tycos Office Thermometers

An aid in promoting human efficiency.

Tycos Bath Thermometers

To enable you to get the most good from your bath.

Tycos Home Set

Bake Oven Thermometer. Candy Thermometer. Sugar Meter. The secret of accurate results in cooking.

Your dealer will show them to you. Ask us, on a postal, for booklets on any of the above.

TYCOS and the MEDICAL Profession

Tycos Sphygmomanometer, Pocket and Office type

Tycos Urinalysis Glassware.

Tycos Fever Thermometers.

Bulletins on Request.

Taylor Instrument Companies

Main Office and Factory

ROCHESTER, N. Y., U. S. A.

Canadian Plant

TYCOS BUILDING
TORONTO
CANADA

Tycos Temperature Instruments

INDICATING · RECORDING · CONTROLLING



PRESIDENT HARDING -

We venture to predict our President will address the nation. Let Tuska Reliable Radio make you a part of his audience. Tuska Quality Radio Apparatus means a lifetime guarantee of reliable service.

Ask for Tuska Radio at your dealers today.

The C. D. Tuska Company
61 Bartholomew Ave.
Hartford, Connecticut

TUSKA RADIO
Established 1911

Catalog Number Four contains Marvellous article on tuning Receiving Sets Ten Cents brings it to you

BETTER SHOP METHODS

Attachment Cuts Worms

(Continued from page 92)

squared or "hexed" to fit a socket wrench and made to fit loosely over the end of the spindle. This is to give a certain amount of flexibility to the connection so that the drill need not be aligned exactly and to permit the motor to be removed with very little trouble. The socket must be deep enough to go over the head of the bolt and the shank small enough to go in the drill chuck.

The cutters are made of tool steel. For the smaller sizes they are two-lipped; the larger ones have three or four teeth. The cutters are all made to the standard included angle of 29 degrees and vary for the different pitches by the size of the small diameter Y.

How the Device Is Operated

After the attachment is bolted to the tool block and the drill attached, the lathe is back geared and the gears to give the correct lead are put on. The blank is put between centers and the cutter set to cut the correct depth by measurement or by using the micrometer dial of the lathe. The carriage is run away from the work and the nut engaged. The belt is pulled by hand till the cutter is almost up to the work so that all lost motion in any of the parts is taken up. Now the drill is started and the pulling of the belt by hand continued. As the cutter enters the work, the behavior of the motor will tell whether the feed is too fast or too slow. If the feed is too fast, the drill will slow down, giving warning and protecting the cutter from breaking. Care should be taken to see that the feeding is regular and continuous. Do not jerk the belt. On small worms only one cut need be taken, but on coarse pitches it is advisable to divide the work between two cuts. If the thread is multiple, the indexing is accomplished in any of the usual ways, such as moving the carriage a definite distance. In cutting steel a copious supply of oil or cutting compound should be directed on the cutter.

Cuts Splines and Keyways

Another use to which this device is put is cutting keyways and splines in shafts. Tapered shafts, which are troublesome to set up on the milling machine, shafts with gears of other projections in place, may be keyseated without trouble with this device by using a small end mill.

We have built another of these attachments to fit a large lathe, 32-in. swing, and the attachment is used almost exclusively for keyseating. Large work that has been turned up can be keyseated before being taken out of the lathe, which effects a considerable saving of time in handling. Such work as heavy rolls too large to put on the milling machine table, complicated and cumbersome parts, such as dough mixer beaters or multiple throw crankshafts, may be put between centers and keyseated in a short time. This large attachment takes cutters with No. 3 shanks, has a worm and wheel drive of 10 to one ratio, to give more power to the cutter, and the electric drill stands parallel to the lathe axis.

A SLIGHTLY glazed emery wheel will produce a high polish on the work. An ordinary pebble rubbed on the wheel will produce the proper glaze for this purpose.



Think of it! \$175 paid to F. L. Bennett, Amsterdam, N. Y., for one mechanical drawing.

Any young man can easily duplicate Bennett's success by practicing at home like he did. You, too, can become an expert draftsman if you are ambitious.

A new, simple method of drafting puts the **big jobs** within your reach. Master Draftsman Bitting will show you how. You begin to DRAW at once. No long and tedious study. Bitting has made draftsmen in 100 hours.

Drawing Outfit FREE!

To those who act at once we offer a complete drawing outfit FREE. This is a special offer to beginners who want a well paid profession—not merely an ordinary job!

Blue Print Reading There's big money in blue print reading, and you can perfect yourself in this important and profitable work without learning to draw.

Costs Nothing to Find Out

Write today for our free offer on professional draftsman's outfit. Find out how you, too, can get \$175 for a single drawing or become a blue print expert. Send for FREE book "Language of the Engineer." Address

MASTER DRAFTSMAN BITTING
Dept. 253
15th and Wallace PHILADELPHIA, PA.

CHEMICAL APPARATUS LABORATORY SUPPLIES and CHEMICALS

Send for our free illustrated Price List No. 2

BAKER & UNVERHAU, Queens, L.I., N.Y.

The Finger Print on the Gun



Two shots rang out in the darkness with but a single report. One found its mark in the heart of an innocent man. The other crippled the gun arm of the murderer. A thrill-ling escape through a cordon of police. But behind lay the murderer's revolver with the telltale finger print clearly impressed on the smooth, blued steel.

Almost every paper tells of the exploits of the Finger Print expert, the master detective. Why don't you—

Be a Finger Print Expert

More men are needed every day. But only trained men are wanted. We will train you at home in your spare time, as we have trained many of America's greatest experts.

Big Money to Experts Big salaries are paid. Rich rewards offered for "wanted" man. Unlimited opportunities for a professional business of your own.

Special Offer Now Write at once. Get our Free book on Finger Prints, full of true stories of crime mysteries solved by our graduates. Free Professional Outfit and Free course in Secret Service Intelligence if you enroll now. Write today.

University of Applied Science
1920 Sunnyside Ave., Dept. 1363, Chicago



Go Where the Fish Are

Through the rushes and the lillies—the snaggy bay and rocky channel—go anywhere. The Elto is weedless and it safety-tilts when the propeller protector hits rock or snag. No injury to motor or boat. Go where the fish are!

An Extra H.P.—Full 3 H.P.

NOTWITHSTANDING its light weight, the Elto is the most powerful outboard motor—not just according to someone's "say-so", but by actual piston displacement. You need this extra H. P. to get speed from ordinary substantial boats—to buck river currents or headwinds and to carry loads. The Elto is the fastest most powerful light weight motor.

Easy starting and safety steering make it the family motor. You'll find no hard, stubborn starting with the Elto, because its Hot-Shot, waterproof battery gives it a spark so intense—so big and powerful, independent of cranking speed, that anyone can start the Elto with a quarter turn.

Safety Rudder Steering—does away with all possibility of dangerous pivot turning—lets you steer with tiller rope from any part of the boat—frees your hands for rod or gun except at turns—frees them from constant holding to a tiresome, shaky steering handle.

Fastest on any type of boat. The Elto has proven beyond all dispute to be the speediest, most powerful outboard motor. Wherever stock models are used, Elto leads in speed.

As light as right. Ole Evinrude, the pioneer outboard motor designer, who builds the Elto under personal direction, can be trusted to find that point where light weight, power, speed, and durability meet—to build light, but with no sacrifice of power, speed, bearing or wearing surfaces.

Ole Evinrude has built years of trouble-free service into the Elto. Ask for this, his latest motor, by name—the ELTO. The fast, light, easy-starting, vibrationless, 3 H. P. Twin. Grease-tight gear housing—silent underwater exhaust—quick reverse—weedless construction—folding rudder. Goes into carrying case without taking apart. Symmetrical design, beautiful finish. Write for catalog.



Safety Tilting and Floating Type Propeller Shaft Prevent Bearing Wear

I have found in outboard motor building that disalignments of shaft and gears cause strain, severe wear and consequently short life.

This has been eliminated in the Elto by the unique construction of its one-piece lower main frame which takes all shock and strain from the shaft in the same way as in the floating type automobile rear axle. The main frame houses the drive shaft in a way that protects it from all possibility of disalignment.

Cordially,

Ole Evinrude

**3 H.P. Fast
Light Twin**
"As light as right"

**Dealers and Demonstrating
Agents write for proposition—
some good territory still open.**

Elto Outboard Motor Co.
Dept. AA, Mfgs. Home Bldg. Milwaukee, Wis.



Elto



\$20.00 a Week

This Man Wouldn't Stay Down

HE was putting in long hours at unskilled work. His small pay scarcely lasted from week to week.

He saw other men promoted. Then he learned the reason. They had special training. He made up his mind to get that kind of training.

He sent to Scranton a coupon like the one below. That was his first step upward.

The reward was not long coming—an increase in salary. Then he was made Foreman. Now he is Superintendent.

It just shows what a man with ambition can do! What about you? You don't have to stay down. You can climb to the position you want in the work you like best.

The way to do it is easy—without obligating yourself in any way, mark and mail this coupon.

INTERNATIONAL CORRESPONDENCE SCHOOLS

Box 7631-C, Scranton, Penna.

Without cost or obligation on my part, please tell me how I can qualify for the position or in the subject before which I have marked an X:

BUSINESS TRAINING DEPARTMENT

- | | |
|---|---|
| <input type="checkbox"/> Business Management | <input type="checkbox"/> Salesmanship |
| <input type="checkbox"/> Industrial Management | <input type="checkbox"/> Advertising |
| <input type="checkbox"/> Personnel Organization | <input type="checkbox"/> Better Letters |
| <input type="checkbox"/> Traffic Management | <input type="checkbox"/> Foreign Trade |
| <input type="checkbox"/> Business Law | <input type="checkbox"/> Stenography and Typing |
| <input type="checkbox"/> Banking and Banking Law | <input type="checkbox"/> Business English |
| <input type="checkbox"/> Accountancy (including C.P.A.) | <input type="checkbox"/> Civil Service |
| <input type="checkbox"/> Nicholson Cost Accounting | <input type="checkbox"/> Railway Mail Clerk |
| <input type="checkbox"/> Bookkeeping | <input type="checkbox"/> Common School Subjects |
| <input type="checkbox"/> Private Secretary | <input type="checkbox"/> High School Subjects |
| <input type="checkbox"/> Business Spanish | <input type="checkbox"/> Illustrating |
| <input type="checkbox"/> French | |

TECHNICAL AND INDUSTRIAL DEPARTMENT

- | | |
|---|--|
| <input type="checkbox"/> Electrical Engineering | <input type="checkbox"/> Architect |
| <input type="checkbox"/> Electric Lighting | <input type="checkbox"/> Blue Print Reading |
| <input type="checkbox"/> Mechanical Engineer | <input type="checkbox"/> Contractor and Builder |
| <input type="checkbox"/> Mechanical Draftsman | <input type="checkbox"/> Architectural Draftsman |
| <input type="checkbox"/> Machine Shop Practices | <input type="checkbox"/> Concrete Builder |
| <input type="checkbox"/> Railroad Positions | <input type="checkbox"/> Structural Engineer |
| <input type="checkbox"/> Gas Engine Operating | <input type="checkbox"/> Chemistry |
| <input type="checkbox"/> Civil Engineer | <input type="checkbox"/> Pharmacy |
| <input type="checkbox"/> Surveying and Mapping | <input type="checkbox"/> Automobile Work |
| <input type="checkbox"/> Metallurgy | <input type="checkbox"/> Airplane Engines |
| <input type="checkbox"/> Steam Engineering | <input type="checkbox"/> Agriculture and Poultry |
| <input type="checkbox"/> Radio | <input type="checkbox"/> Mathematics |

Name..... 6-26-22

Street Address.....

City..... State.....

Occupation.....
Persons residing in Canada should send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada.

EARN MONEY AT HOME

YOU can make \$15 to \$60 weekly in your spare time writing show cards. No canvassing or soliciting. We instruct you by our new simple Directograph system, pay you cash each week and guarantee you steady work. Write for full particulars and free booklet.

WEST-ANGUS SHOW CARD SERVICE
63 Colborne Building Toronto, Can.



Own a Home Workshop!


Build Radio parts, boats, furniture, etc. We supply shafting, pulleys, hangers, belting, motors and supplies.

Don't waste time on makeshifts. Order good supplies. We also manufacture bench machines. Write for Prices.
HESTON & ANDERSON, Fairfield, Iowa.

BETTER SHOP METHODS

Adapter for Lathe Tailstock Holds Small Drill

TO HOLD small drills in the tailstock of the lathe ordinarily requires either a small draw chuck or a wrench chuck with a Morse shank to fit in the spindle. A special adapter, made as illustrated, will take the place of such a chuck. It is a simple piece of bar stock turned with a

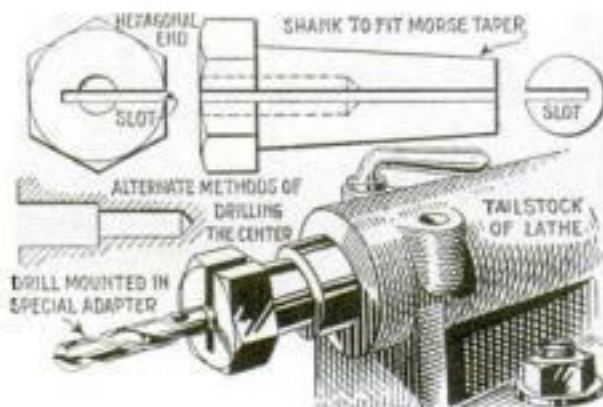

Simple in construction, this adapter serves as a chuck for small drills

Morse taper shank and drilled with two holes, as shown, to accommodate the drills.

The forward hole can be made to fit a 1/4-in. drill and the small hole a 1/8-in. drill. Other shanks can be made to accommodate other drills, if necessary.

The hexagonal end is for the purpose of taking the tool out of the spindle, while the lengthwise slot, which nearly severs the shank, allows the two sides to grip the drill when the shank is driven into the spindle hole. This unusually simple adapter is readily made up and saves much time and inconvenience in mounting a drill.—G. A.

Clamps Quickly Made from Short Lengths of Channel Steel

IN EVERY shop large clamps, small clamps, wide clamps, and all kinds of clamps are constantly in demand. Good serviceable ones may be made from ends of structural channels. These are cut up in convenient lengths and tapped for one or two setscrews, as shown. The screw is then used to clamp the work against the

ONE OR TWO SETSCREW HOLES



SMALL AND LARGE SECTIONS ALL FORM CLAMPS FOR SOME PURPOSE



USED ON THE BENCH TO HOLD LONG STOCK

Waste channels serve for cutting clamps of various sizes

opposite flange of the channel, and for fine work a block can be interposed between the work and the point of the screw.

For holding work on the drill-press table, for securing parts together while riveting, for holding long stock while sawing, and for hundreds of other purposes, these clamps will be useful. Whenever a length of channel is available, it is well to seize the opportunity to make one or more.—M.B.K.

5-Room House \$538



You can buy all the materials for a complete home direct from the manufacturer and save four profits on the lumber, millwork, hardware and labor.

7 ROOM HOUSE \$1068

Prices quoted include all lumber cut to fit, windows, doors, woodwork, glass, paints, hardware, nails, lath and roofing. Complete drawings and instructions. Many styles to choose from.



Highest grade lumber for all interior woodwork, siding and outside finish. Send today for money-saving Aladdin Catalog No. 2339

The ALADDIN Co., BAY CITY, MICHIGAN

Also Mills and Offices at Wilmington, North Carolina; Portland, Oregon; and Toronto, Ontario

Wide Range Proves Crosley Efficiency

Sebring-Florida
Honolulu-Hawaii

The remarkable results achieved with Crosley Radio Instruments are equaled only by their exceptionally low cost. A man in Sebring, Fla., using a Model X Crosley Instrument—Price only \$55 for this four tube set—writes: "We are receiving from all standard stations north, east and west—from Winnipeg, New York City, Seattle and one night received three selections from K. D. Y. N. at Honolulu, Hawaii."

From our one tube regenerative receiver at \$16.00 made for us under license under Armstrong Patent No. 1,113,149 to our beautiful console Model XXV at \$150, Crosley Instruments offer the highest efficiency at the lowest cost. Storage batteries unnecessary.

Listen In On a Crosley and Be Convinced. Sold by Dealers and Jobbers Everywhere.

Write for this free Catalog
CROSLEY MFG. CO.
317 Alfred St., Cincinnati, O.

CROSLEY
Better - Cost Less
RADIO



KEEP A DAY AHEAD

of the headlines of tomorrow's newspapers!

Don't be satisfied with the regular broadcast program! Get the most out of radio! Hundreds of radio enthusiasts are doing it!

Equip your vacuum tube set with a **FINCH RADIO RELAY** and you will automatically receive and at the same time have a permanent record of all the important and interesting news events of the world, whether or not you know the code

Send Today for Booklet PS3

FINCH RADIO MFG. CO.
303 FIFTH AVE., N.Y. CITY.

Good Tools

for the things to be made
and "fixed"

ODD jobs of carpentering and tinkering. Always bobbing up—aren't they? You'll sidestep them, every time, if you have to work with poor tools. You'll tackle them, every time, if you have workmanlike tools to give you a lift. And you'll do a job you're proud of.

For 55 years we have been making tools as well as we know how. Today it is safe to say there is not a community in all Christendom where Millers Falls Tools are not used by people who respect *fine* tools.

Pick up a Millers Falls tool the next time you are in a hardware store. You may not be a master mechanic, but you don't have to be to know that Millers Falls tools are a joy to work with. They have the "hang" and balance that only good tools have.

MILLERS FALLS COMPANY
Millers Falls, Mass.

**Manufacturers of Carpenters' Tools, Hack Saws
and Automobile Tools**

MILLERS FALLS TOOLS

**SINCE
1868**

Make Your Own RADIO

POPULAR SCIENCE
MONTHLY

Will Furnish a Reliable Blueprint

For men who like to make things at home with tools POPULAR SCIENCE MONTHLY is now publishing, in addition to its popular woodworking plans, an invaluable radio blueprint. This blueprint is easy to understand; the receiving set described requires the purchase of the fewest possible number of parts.

Should Receive 500 Miles


Under favorable conditions, if a long, high aerial is used, this receiving outfit will receive 500 miles. The blueprint contains working drawings, instructions, Popular Science Monthly,

225 West 39th St., N. Y. City

Enclosed is 25c for which please send me the blueprint of the two-stage regenerative receiving set.

Name.....

Address.....
P. S. March

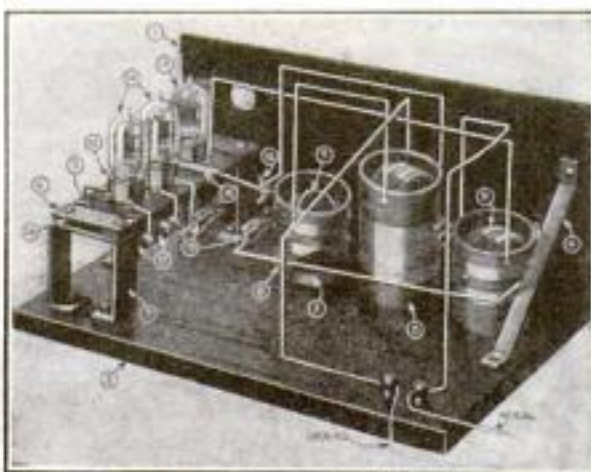

The vacuum tube set with two stages of amplification, from rear of panel

and bill of materials of a two-stage regenerative receiving set that a professional would be proud to own. It comprises a variocoupler and an Armstrong two-variometer-regenerative tuning circuit coupled, if desired, with two stages of audio frequency amplification.

The tuning coils have been selected because of the ease with which they may be constructed at home.

In this set has been incorporated the best features of several types of outfits. It will tune from 180 meters to about 600 meters with remarkable sharpness and selectivity.



TWENTIETH CENTURY Book of Recipes, Formulas and Processes

This book of 800 pages is the most complete Book of Recipes ever published, giving thousands of recipes for the manufacture of valuable articles for every-day use. Hints, Helps, Practical Ideas and Secret Processes covering every branch of the useful arts are given.

10,000 Practical Formulas—The
Best Way to Make Everything

A book to which you may turn with confidence that you will find what you are looking for. A mine of information, up-to-date in every respect. Contains an immense number of formulas that every one ought to have that are not found in any other work.

Price \$4.00

Popular Science Monthly
225 West 39th Street, New York

How to Make Things Electrical

Have the fun of doing it
yourself and save
half the cost

This book gives directions for making hundreds of electrical appliances and devices for the home, the shop and the garage. The simple directions and many drawings make the work easy.

429 pp. Price, \$1.90 post paid.

POPULAR SCIENCE MONTHLY
225 West 39th Street, New York City



NEW WITTE
Throttling Governor
ENGINE—Simple—Wonderful.
Runs on either Kerosene, Gasoline or Distillate. Starts without cranking. Vary power at will. Mechanically perfect. Years Ahead—Dollars Better. New Catalog FREE—Shows all styles. Cash or Terms. Write us.

WITTE ENGINE WORKS
2220 Oakland Avenue, - KANSAS CITY, MO.
2220 Empire Building, - PITTSBURGH, PA.
131 Fremont Street, - SAN FRANCISCO, CAL.

WRITE JOKES

Easy, fascinating work. Our sales department pays from \$1 to \$5 for jokes, epigrams and stories. A short course of three lessons teaches you how to write them. One joke alone often pays for the course. Humorists earn big pay. Get into a field that is not yet crowded.

Write for information.

AMERICAN INSTITUTE OF HUMOR
Office K, 414 Park Bldg., Cleveland, O.




BETTER SHOP METHODS

Block Fixture for Forming Flanges on Copper Pipes

SUCCESS in making gasoline and oil line connections that will not leak depends mainly upon the flanging of the copper pipe. A shallow or an uneven flange is difficult to draw up firmly enough to prevent leakage, and there is danger of stripping the thread from the coupling in an effort to tighten the joint.

A fixture made as illustrated will flange the pipe to form a perfect seat and yet save considerable time over methods that involve the use of a hand flaring tool or

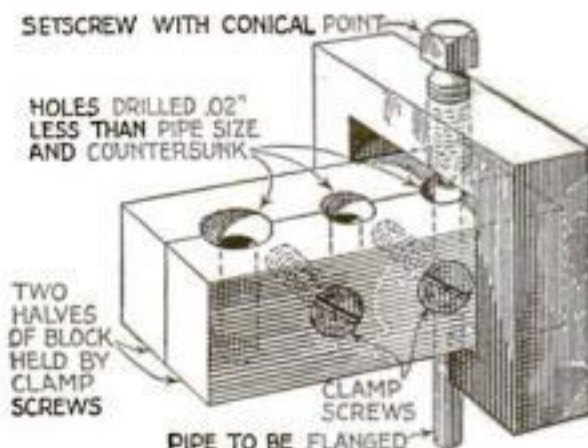


Conical point on setscrew flares pipe for making gasoline and oil line connections

punch and hammer. The device consists primarily of a block in which holes have been drilled of diameters slightly less than the stock sizes of pipe. These holes are countersunk and the block is cut in two after other holes are drilled and tapped for screws to hold the sections together.

A block shaped like a square C clamp is made to fit over these parts. A 1/2-in. setscrew is fitted into the clamp, as shown, and the end of it is ground to a conical point. It is then only necessary to place the pipe in the fixture and screw down the setscrew. The pipe will not split unless it is hard, under which circumstances it should be annealed by heating and quenching in water.—L. D. J.

Special Lathe Tailstock Tool

ALTHOUGH many mechanics use only lathe tools erected in the toolpost of the lathe cross head, special tools for duplication work set into shanks fitting the tailstock are often advantageous in that tools

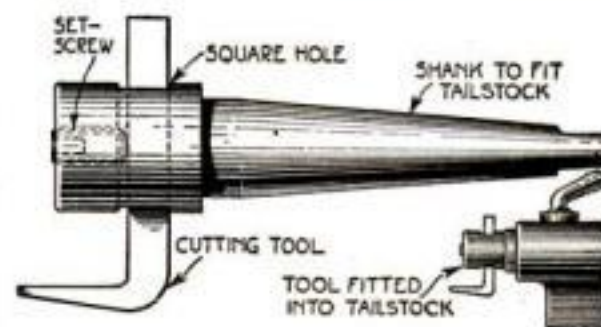

Saves time in simple duplicate lathe work

for different purposes are made available without changing one for another.

For example, a large number of disks with a threaded shank were to be lathe turned. A shank was turned to fit the tailstock and one end of this was left large to accommodate a setscrew and tool. A suitable side cutting was then made as shown. The same shank could be used to hold tools of other shapes.—F. M. H.



Radio Insulation that has the Call!

WHEREVER radio parts and supplies are sold, Formica is called for by buyers or is instantly accepted by them as being a radio insulating material that has no superior.

That is due to the nation-wide reputation for quality which Formica has won. It is used exclusively by many makers of radio sets of the finest grade. Experienced amateurs everywhere hold it in the highest respect.

In color, in beauty and uniformity of finish, Formica has for many years had no equal. It works splendidly with ordinary tools—maintains the highest dielectric strength and gets better with age.

Send for these leaflets:

"What Formica Is" tells the story of the different grades of Formica for all sorts of electrical and mechanical uses.

"Noiseless Non-Metallic Gears and Pinions," describes the mechanical uses of Formica in automobiles and machinery.

"Unbreakable, Oil Proof Pump Valves," deals with Formica discs and balls for use in pumps.

"The Popular Insulation for Radio Panels and Tubes," discusses the radio uses of Formica.

DEALERS:—The policy of the Formica Company is to co-operate aggressively with the jobber and dealer. You get prompt shipments, and high grade printed matter and sales helps for your store.

THE FORMICA INSULATION COMPANY

4630 Spring Grove Ave.
Cincinnati, Ohio

SALES OFFICES

50 Church St., New York, N. Y.
422 First Ave., Pittsburgh, Pa.
1042 Granite Bldg., Rochester, N. Y.
415 Ohio Bldg., Toledo, Ohio

Sheldon Bldg., San Francisco, Cal.
Whitney Central Bldg., New Orleans, La.
414 Finance Bldg., Cleveland, Ohio
9 South Clinton St., Chicago, Ill.

1210 Arch St., Philadelphia, Pa.
313 Title Bldg., Baltimore, Md.
1819 Lyndale Ave., S., Minneapolis, Minn.
47 King St., Toronto, Ont.

FORMICA

Made from Anhydrous Redmanol Resins
SHEETS TUBES RODS

Keeps His Eye on The Score


Any game a man plays, his eye is on the score. It's the same when he's operating a machine.

On the machine a Veeder Counter keeps the score. And your worker keeps his eye on it.

Maybe he's trying to *better* his record—at producing. Maybe he's only watching out to prevent a *poor* showing. In either case, his production is *HIGHER* because of a


Veeder COUNTER

The Set-Back Rotary Ratchet Counter below is for machines such as presses and metal-stamping machines, where a reciprocating movement indicates an operation.

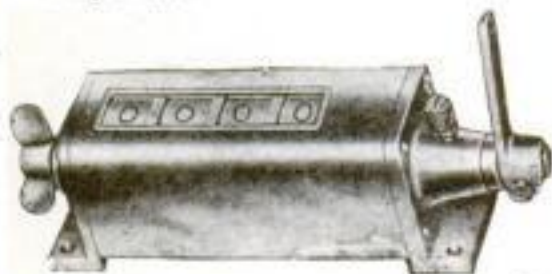

Registers one for each throw of the lever, and sets back to zero from any figure by turning knob once round. Supplied with from four to ten figure-wheels, as required. Price with four figures, as illustrated, \$11.50—subject to discount. (Cut less than 1/2 size.) Set-Back Revolution Counter of similar model, \$10.00 (list).

This small Rotary Ratchet Counter (No. 6) counts reciprocating movements of the lever, as required for recording

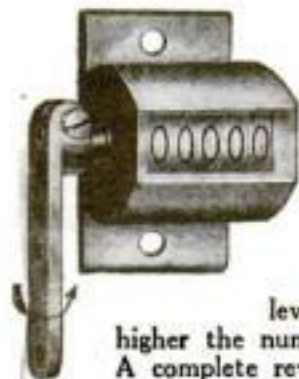

the output of innumerable small machines. When the lever is moved through an angle of 40 to 60 degrees, the counter registers one. The further the lever is moved, the higher the number registered. A complete revolution of the lever registers ten. This counter can be adapted to no end of counting purposes, by regulating the throw of the lever. Price, \$2.00. (Cut nearly full size.) Small Revolution Counter, also \$2.00.

Everything you could ask in a counting device is shown in the new 80-page Veeder booklet. Ask for this foremost counter booklet.

The Veeder Mfg. Co.,
44 Sargeant St., Hartford, Conn.



The Home Workshop

How to Build a Cedar Chest

(Continued from page 78)

plated hinges may be used, and two heavy chest stays should be provided.

Great care should be taken in finishing the chest. The cedar is always left in the natural color and requires merely to be varnished. If the mahogany is of a dark variety, it also can be left in the natural color, but ordinarily it should be stained either by applying a mahogany stain before filling or by using a mahogany filler.


If natural colored paste filler is darkened with burnt sienna, the result will usually give a brown mahogany color that looks well. If an antique mahogany finish is desired, the wood can be stained before filling with a solution of 1/4 oz. of potassium

1-in. brads, the heads of which are cut off with pliers before the brads are set; then, when driven in, they do not leave large holes to be filled in finishing.

Three stout brass hinges are used for hingeing the cover and two chains provided to prevent its falling backward. A brass lock and handles are put on after the chest is varnished. A sliding tray 4 in. deep and 1 ft. shorter than the chest is pro-



A neat and substantial homemade chest built according to details at the left

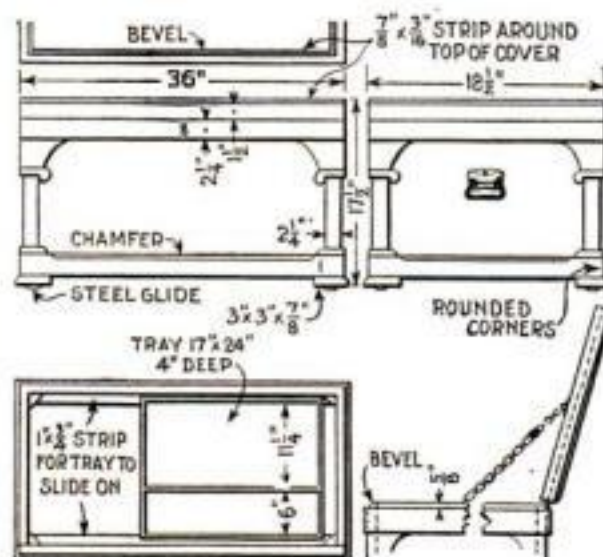

Details of chest shown at the right

bichromate in 1 pt. of hot water, applied cold. In any case, the mahogany should be filled with paste filler.

Additional working details and bill of materials for this chest are contained in Home Workshop Blueprint No. 17 and will be sent anywhere for 25 cents to cover the cost of blueprinting and handling.

One advantage in building a chest is that it can be designed to suit the space available. Sometimes commercial chests are too long or do not, in the smaller sizes, have sufficient capacity. It was to overcome objections of this sort E. E. Scott of Pittsfield, Mass., designed and built the chest illustrated above.

The lumber required is 26 board feet of 7/8-in. stock and 30 linear feet of 3/8 by 2 1/2-in. stock. The material is cut roughly to size and tongued and grooved at the mill for a small extra charge. The corners are not dovetailed, the trim serving to cover up the screws that hold the joints together.

The first step is to match up the boards for the bottom, glue and clamp them together and, after the glue is dry, to cut out a rectangle 35 1/4 in. by 17 3/4 in. The sides and ends are then built up, all being joined at the corners with 2 1/2-in. screws, countersunk. The corners are reinforced inside with 1-in. quarter round molding.


The trim is then cut and fitted. The corner joints in this case are mitered and the trim is attached with liquid glue and

vided. It can be covered with cretonne.

The finish is three coats of varnish, each sandpapered, followed by a final coat that should be sanded and rubbed with No. 0 steel wool, and polished with powdered pumice stone and oil. It then should be rubbed with curly horsehair.

Usually the inside shows the bare wood, but a good cretonne could be used in this case to conceal the wood and the fabric quickly becomes saturated with the delicate red cedar odor. This adds a distinctive feature not found in purchased chests.

Two of many styles of chests made entirely of cedar are shown in the small illustrations on page 78. These are fin-

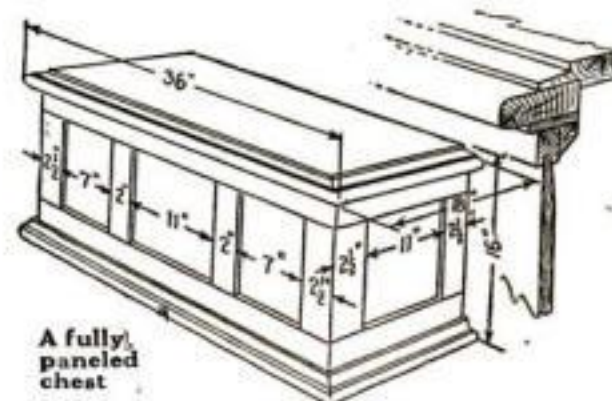

A fully paneled chest

ished in the natural wood and are ornamented with copper bands. Sizes that seem to be the most popular are 15 in. high, 19 in. wide, and 35, 40, or 44 in. long, and 17 in. high, 21 in. wide, and 48 in. long.

The chest illustrated above is not so frequently seen. The sides and ends are paneled, the rails and stiles being 7/8-in. stock and the panels 1/2 in. The box itself is 36 in. long, 16 in. wide, and 16 in. high, the lid and base extending 1 in. beyond the sides and ends.

Hardware and trimmings for chests are shown in the illustrations on page 101. The larger handles have plates about 2 1/2

THE HOME WORKSHOP

by 5½ in. They are made in copper finish, brass, and bronze.

One leaf of a chest hinge is offset ¾ in. so that it bears against both the edge and the inside surface of the back of the chest. In some of the finer chests a continuous or "piano" hinge is used; this was the case in the original model of the "blueprint" chest. Stays and supports are made in both the styles illustrated and range from 6 to 14 in.



in length. Locks also vary in size, workmanship, and finish.

Thin gage copper bands for trimming chests can be obtained in various sizes, the most common being 2 or 4 in. wide, 11, 14, 22, and 28 in. long. Most of these bands have a satin finish and are lacquered to prevent tarnishing. Fancy designs are also frequently used. The one illustrated with the f openings is intended to be bent around chest corners. The two escutcheons are stock designs, but it is a simple matter to cut original designs from the plain strips. Copperized nails are used ordinarily for attaching the strips. Trim-mings in imitation of old hammered copper are also manufactured. All these supplies can be obtained through hardware dealers or manual training supply companies.

Coupon for Ordering Blueprints

Blueprint Service Dept.
Popular Science Monthly
225 West 39th St., New York

GENTLEMEN:

Send me the blueprint, or blueprints, I have checked below, for which I inclose . . . cents in stamps or coin:


No.	Title	Price	
1.	Sewing Table	25c	<input type="checkbox"/>
2.	Smoking Cabinet	25c	<input type="checkbox"/>
3.	Book Trough End Table	25c	<input type="checkbox"/>
4.	30-ft. Monoplane Glider	50c	<input type="checkbox"/>
5.	Kitchen Cabinet	25c	<input type="checkbox"/>
6.	V. T. Radio Receiving Set	25c	<input type="checkbox"/>
8.	Shaving Cabinet	25c	<input type="checkbox"/>
9.	Arbor with Gate and Seats	25c	<input type="checkbox"/>
10.	Porch Swing	25c	<input type="checkbox"/>
11.	Bench and Tilt-Top Table	25c	<input type="checkbox"/>
12.	Electric Washing Machine	25c	<input type="checkbox"/>
13.	Tea Wagon	25c	<input type="checkbox"/>
14.	Toy Train, Horse, and House	25c	<input type="checkbox"/>
15.	Home Workshop Bench	25c	<input type="checkbox"/>
16.	Inlaid Radio Cabinet	25c	<input type="checkbox"/>
17.	Cedar Chest, Mahogany Trimmed	25c	<input type="checkbox"/>
18.	Telephone Table and Stool	25c	<input type="checkbox"/>

Name
(Please print)

Street

City and State

"PLANK WITH CYPRESS AND YOU PLANK BUT ONCE."

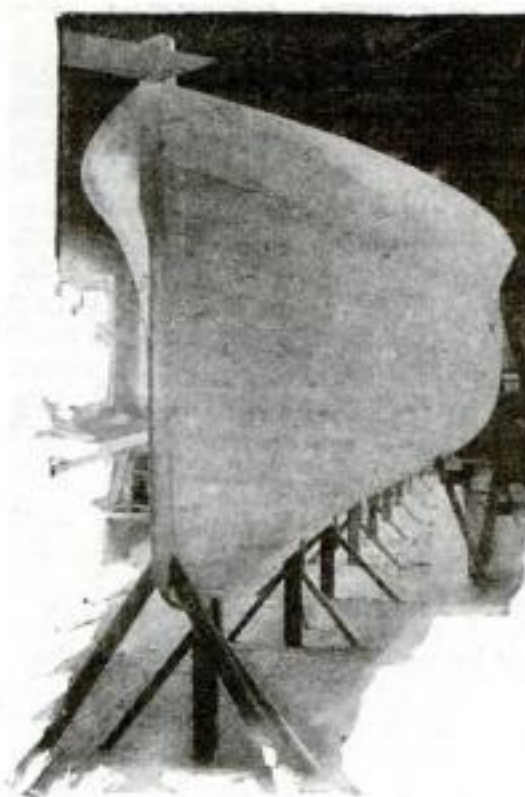

"CYPRESS FOR BOATS IS AS NATURAL AS BOATS FOR WATER."

A Row Boat or a Cruiser?

Now is the time to build her but probably the

First Thing for You to Do Is to Write for the Cypress Boat Book

It's the BRAND-NEW Volume 19, of the famous Cypress Pocket Library, 192 pages, 46 illustrations and a "standard authority on boats."

In it you'll find

4 Full Size Working Plans

and complete specifications for building a ROW-BOAT, a MOTOR-BOAT, a STERN PADDLE-WHEEL CRUISER and a YACHT. All were designed by the foremost marine architects in their respective lines. You will also find suggestions and plans for building and operating a houseboat. And why non-rot, non-warp

Tide Water
Cypress
"The Wood Eternal"

is the best lumber for boats, big or little. Plank with Cypress and you'll be immune from the expense of those oft-recurring repairs that are such a bother to the boat owner. For all marine uses Specify "ALL-HEART GRADE" CYPRESS. It assures you satisfactory service in the highest degree and for the longest period.

Get all the facts. Write for free Volume 19 today.

Southern Cypress Manufacturers' Assn.

1249 Poydras Building, New Orleans, La., or, 1249 Graham Building, Jacksonville, Fla.

INSIST ON TRADE-MARKED CYPRESS AT YOUR LOCAL LUMBER DEALER'S. IF HE HASN'T IT, LET US KNOW IMMEDIATELY.



Trade Mark Reg. U.S. Pat. Office

21 Jewel Burlington



LOOK!

Adjustable to the Second
Adjusted to Temperature
Adjusted to Isochronism
Adjusted to Positions
21 Ruby and Sapphire Jewels
25 Year Gold Strata Case
Your Choice of Dials—
(Including Montgomery R. R. Dial)
New Ideas in Thin Cases.

Only \$1.00 Down

Only One Dollar Down will buy this masterpiece of watch manufacture. The balance you are allowed to pay in small, easy monthly payments. The Burlington—a 21-Jewel Watch—is sold to you at a price much lower than that of other high-grade watches. Besides, you have the selection of the finest thin model designs and latest styles in watch cases. Don't delay! Write for the FREE Watch Book and our Special Offer today.

Write

While this Special Offer Lasts

Get the Burlington Watch Book by sending this coupon. Find out about this great special offer which is being made for only a limited time. You will know a great deal more about watch buying when you read this book. You will be able to "steer clear" of the over-priced watches which are no better. Remember, the Burlington is sent to you for only One Dollar down, balance in small monthly payments. Send the coupon for watch book and our special offer Today! Do not delay one minute!

Burlington Watch Co., Dept. 1363
19th St. and Marshall Blvd., Chicago, Illinois
Canadian Address: 62 Albert St., Winnipeg, Man.

Please send me (without obligations and prepaid) your free book on watches with full explanation of your \$1 down offer on the Burlington Watch.

Name _____

Address _____

THE HOME WORKSHOP


Cedar Lined Chest Has Double Lids

THE feature of this neat and craftsman-like cedar-lined chest is two doors or lids that take the place of a large cumbersome one. These lids have the usual halved joint with a small bead on the edge where they meet at the center. The diamond in the center of each lid is carved to form a recess, as shown. This gives a grip by which to lift the lids without the necessity of using a handle that projects above the top. Flush brass ring pulls may be used instead, and if handles are desired at the ends of the chest, it is well to use flush chest handles, which can be obtained in various designs and finishes.

The chest proper may be made of any $\frac{1}{8}$ -in. wood available. The lining is of cedar, $\frac{3}{8}$ in. or thinner.

Even cigar box wood will do, if no other can conveniently be obtained. The size of the chest shown is 17 by 17 in. by 2 ft. 9 in. This is a medium size chest and for a larger one the dimensions might be 17 in. high, 20 in. wide and 3 ft. long.

Dovetail joints are used at the corners because a fine dovetail is always the sign of good workmanship and needs no embellishment and projecting moldings to enhance its value. Many hand dovetails and

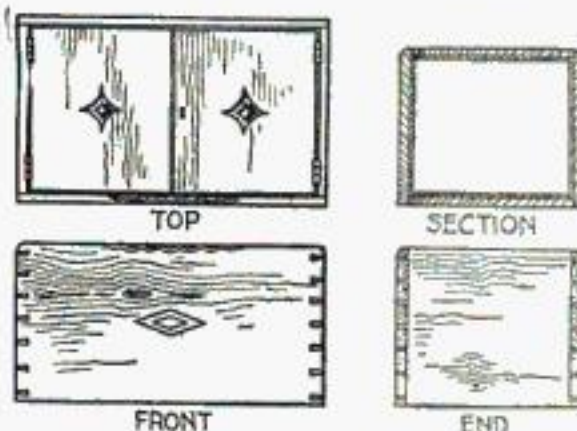

The outside of this chest may be made of any wood, only the lining being of red cedar. The general design is shown above and the details appear at the left.

all machine dovetails are very much coarser than those shown, but for the best results these proportions should be followed. If it is not desired to go to so much trouble, a simpler type of joint may be substituted.

Feet can readily be added and they may either be carved or plain blocks about 4 in. square with the edges slightly rounded and projecting $\frac{1}{2}$ in. Screw the feet from underneath to the bottom of the chest at the corners.—A. E.

Pipe Fittings Form Powerful Press

A CLAMPING, gripping and pressing fixture of ample size is a valuable addition to the home workshop. It saves straining the vise jaws, takes work that cannot be accommodated in the ordinary vise and does away with the necessity of improvising clamps.

The fixture illustrated is made up entirely of pipe fittings and can quickly be put together by any mechanic who possesses pipe cutters and threading dies. It is attached to a vertical post or to the bench, if preferred. Two similar clamps on adjacent posts are useful when long stock is to be handled.


A reinforcement of either $\frac{1}{4}$ -in. steel or iron plate is essential under the clamp. The

two pipe columns pass through the holes bored in the post and are secured by nuts on either face. They support a cross member that is connected to them by means of

elbows and has a cross pipe connection in the center. Threaded into this is the feed screw, the upper end of which terminates in a pipe tee and two lengths of pipe to serve as the handle. The opposite end of the screw is fitted with a loose pipe flange secured with a pin.

Variations from the sizes indicated

may be made, and smaller or larger pipe and connections may be substituted. The joints are treated with red or white lead and secured with drive-fit dowels.—S. N.

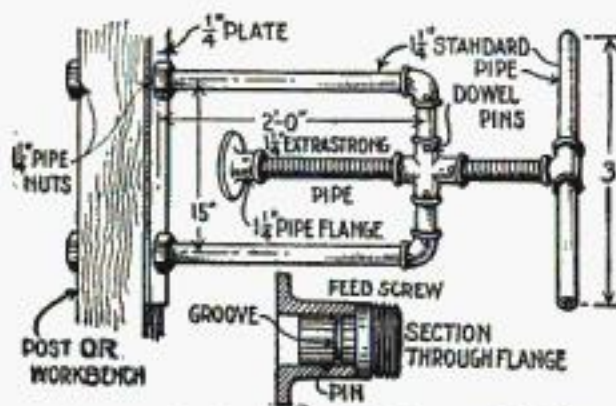

A rugged, cheaply made fixture of wide utility in the small shop

"Best Idea" Prizes Awarded for March

AS A bonus for the "Best Idea" articles contributed to the March Home Workshop, the following awards are made:

FIRST PRIZE, \$15: Gladstone Califf, Richland, Iowa, "How to Remodel Old Furniture Profitably" (see page 104).

SECOND PRIZE, \$10: A. M. Smyth, Germantown, Pa., "Papering Ceilings" (see page 132).

Both of the prize-winning articles contain exceedingly helpful suggestions for

the home worker. Mr. Califf shows that it is rarely necessary to throw away an old piece of furniture. No matter how "second hand" it may be, the handy worker can refinish it so that it will be both useful and attractive, as proved by illustrations accompanying the article.

As for the paperhanging suggestions in Mr. Smyth's article, if followed carefully, they will insure success in the one task that holds the most terrors for the home decorator—papering ceilings.

Two New Members of the Red Seal Battery Family



For Radio

Radio Sparkers, made in 3 sizes
 No. 221—2 cell... \$1.00
 No. 262—6 cell... 3.10
 No. 282—8 cell... 4.00
f.o.b. factories

The Red Seal Radio Sparker, for operating WD-11 Tubes

A special dry battery that lasts nearly 3 times longer

IF YOU have been attaching a single dry cell to each WD-11 tube, there's a better way. The new Red Seal Radio Sparker gives longer service. For example, the two-cell Radio Sparker No. 221, designed to operate one WD-11 tube will last, not twice as long, but $2\frac{1}{2}$ to 3 times as long as a single cell.

Radio sparkers are a complete unit, light in weight and easily handled. They consist of special cells carefully selected and matched. All internal connections between cells are soldered within the attractive container and the famous Manhattan Spring Clip Connectors insure a quick, bull-dog grip with your receiving set. The labels of all Radio Sparkers contain simple diagrams and complete instructions for the "hook up." When you think of WD-11 tubes, think of "Radio Sparkers."

This battery is the product of the oldest and largest national distributor of radio, also makers of the line of famous Red Seal batteries for over 30 years.

Red Seal batteries are made by the Manhattan Electrical Supply Company, Inc., expert battery makers for over 30 years, and the oldest and largest distributors of radio products. Makers also of Manhattan Headsets and genuine Bakelite Variometers and Variocouplers.

Dependable dealers carry Red Seal and Manhattan products



Makers of the Famous Red Seal Dry Batteries, Radio Sparkers and Manhattan Radio Products

New York

Chicago

St. Louis

San Francisco

Plants: Jersey City, N. J.; Ravenna, Ohio

For Ignition

Red Seal Sparkers—steel clad, made in 3 sizes
 141—4 cell, \$2.20
 152—5 cell, 2.60
 162—6 cell, 3.10
f.o.b. factories



The Red Seal Sparker—steel clad

ANOTHER step forward in battery building is the new Red Seal Sparker—steel clad—developed in the Manhattan laboratories.


The container of this new battery is made of heavy open-hearth steel and will not only withstand the roughest of handling, but is moisture proof. It is heavily braced and insulated and is fitted with the extra wide and extra heavy webbed handle for ease in carrying.

A feature of the Red Seal Sparkers—steel clad—is the construction of the top of the steel container. That part of the top where the handle is attached and through which the binding posts protrude is raised, thereby preventing the possibility of water seeping through and causing a short circuit.

The Red Seal Sparker is the dependable ignition battery noted for its power and ability to recuperate quickly after severe drain. To get the utmost in battery ignition for automobiles, tractors, motor boats and all types of stationary gasoline engines, make sure your battery is a Red Seal Sparker—steel clad. A complete line of 4, 5 and 6 cell sizes is obtainable at electrical, hardware and automotive supply dealers.

Use Red Seal batteries for experimental work and for bells and buzzers or any other work requiring dry batteries.

"Recommended for appointment"

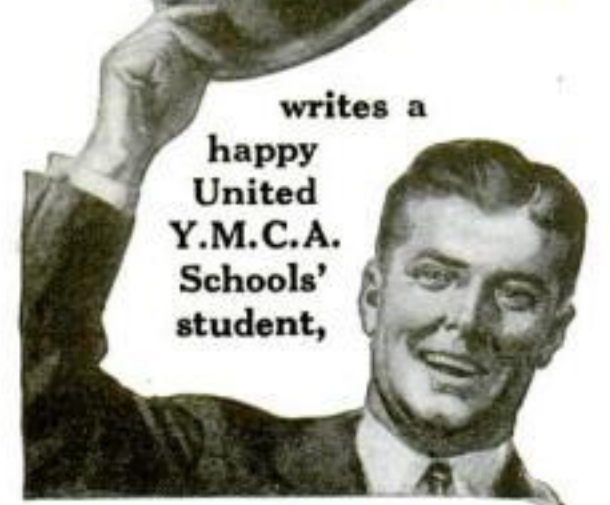

formerly of Scranton, Pa., and now in the employ of the United States Government. He was an office clerk, working long hours. He says "the light had dawned" that he was tied down to routine work for all time unless he trained himself. So he decided to devote spare evening hours to our excellent correspondence course in accountancy. He earned a salary increase of 60% before completing his course and in a year qualified for United States Internal Revenue service (Pittsburgh Division) as auditor of income taxes, with a further substantial increase of salary and responsibility. The course he selected is just one of more than three hundred that we offer, all reasonably priced, all bringing the close personal service that is a feature of United Y. M. C. A. Schools instruction by mail. Do you want more power, more money, a broader field? Write us about your ambition and get our friendly counsel free. Soon you, too, can be throwing up your hat over the advance you have made.

- Some of our 300 Correspondence Courses
- | | |
|-------------------------|------------------------------------|
| Business Courses | Technical and Other Courses |
| Accountancy | Agricultural Courses |
| Advertising | Applied Psychology |
| Banking | Architecture |
| Bookkeeping | Automobile Courses |
| Business Arithmetic | Building Construction |
| Business Administration | Civil Engineering Courses |
| Business English | Drafting Courses |
| Business Finance | Electrical Courses |
| | English Courses |
| | Factory Management |
| | Foreign Languages |
| | Foremanship |
| | Highway Engineering |
| | High School Courses |
| | Illustrating |
| | Insurance Courses |
| | Mathematical Courses |
| | Mechanical Engineering |
| | Own-Your-Home Course |
| | Plan Reading |
| | Plumbing |
| | Poultry Husbandry |
| | Radio Engineering |
| | Radio Telegraphy |
| | Steam Engineering Courses |
| | Structural Drafting |
| | Surveying |
| | Use of the Slide Rule |
| | Vocational Guidance |
| | Are you an ex-service man? |

Correspondence Instruction
347 Madison Avenue
New York City
Dept. S-M

Without obligating me, please advise regarding the course in

Name

Full Address
(Please write plainly.)

MAKE MONEY AT HOME

YOU can earn from \$1 to \$2 an hour in your spare time writing show cards. Quickly and easily learned by our new simple "Instructograph" method. No canvassing or soliciting; we teach you how, guarantee you steady work at home no matter where you live, and pay you cash each week. Full particulars and Booklet Free.

AMERICAN SHOW CARD SCHOOL
206 Ryrie Building Toronto, Can.

DIAMONDS-WATCHES CASH or CREDIT

Send for Free Catalog Over 2000 Illustrations, Everything fully explained.

LIBERTY BONGS ACCEPTED
"Lady Louise" Diamond Ring. Blue white, perfect cut Diamond, set in 18-k Solid White Gold prongs. Ring is Solid Green Gold. Special at \$50. Others at \$75, \$100, \$150 up.

LOFTIS BROS. & CO.
Dept. L-571 108 N. State St., Chicago, Ill.

How to Remodel Old Furniture Profitably

By Gladstone Califf


IS THERE an old table in your attic that might be refinished, or a bureau of your grandmother that could be remodeled into a writing desk, or an old walnut breakfast table with a warped top that might be transformed into a dressing table? If so, why not undertake the work now, when the evenings are long and your home workshop is particularly inviting? You can do all sorts of miracles in the way of remodeling and refinishing old pieces, as I know from my own experience.

Almost every family has old pieces of furniture that belong to the past and are cherished only for their associations. These possess little value from the viewpoint of a secondhand dealer, but often can be given considerable actual value by a little work with tools and brush.

Suppose you have an old walnut table with a good top and two drop leaves, as I had. You can do many things with it, and one is to make a dressing table. Pick out the side that has the best appearance and cut out openings for the drawers in the rail. Make the drawers to fit, being sure to get them square and true. This work is not difficult, especially if you are lucky enough to have a combination plane. The sides and bottom of the drawers can be made of soft wood, such as cypress.

Drop Leaves Make Mirror Frames

The mirror rest is a straight piece of walnut; the frames are material from the drop leaves, the corners being fastened with halved joints. The glass fits into rabbets cut in the back of the frames. The center frame is stationary and the two side ones are hinged to it with loose pin butt hinges. The glass is dropped into the rabbet, a piece of heavy paper is laid over it, and it is fastened in place with brads driven into the frame at an angle. A piece of wallboard is nailed to the back of each frame with round brass upholstery nails or escutcheon pins. The drawer pulls are wood to match the table, although commercial knobs finished in dull bronze or other finishes can be used, if preferred.

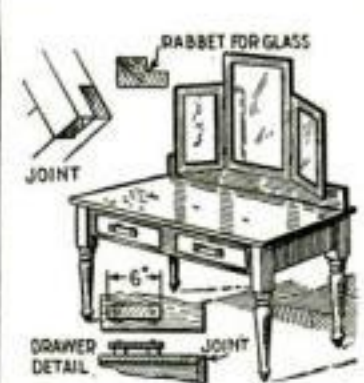

Walnut table converted into dressing table

Perhaps the table you have is a little larger or smaller; you can use your own judgment as to dimensions. If you run out of wood, you can find what you want at a lumber yard, except perhaps some of the finer hard woods, such as walnut, but even then the lumber dealer will get it for you or you can buy it by mail from one of the large firms specializing in lumber for manual training classes.

An old washstand or a very small table can be converted into a dressing table by

using the ends as they are and mortising longer rails at the front and back. The washstand drawer, if there was one, will probably serve for the dressing table.

Perhaps you have a discarded bedstead of some kind; it offers many opportunities.

I converted an old fashioned walnut bed known as a Jenny Lind bed, into the card table illustrated. The table has a double top. The half that ordinarily stands against the wall can be let down and the whole top revolved so that the hinged joint runs across the frame, and both halves are supported squarely and centrally over the frame. The top is square when opened to its full extent. The proper place for the pivot can be found by trial.



Card table made from discarded walnut bed

The legs were made by sawing off the parts marked A, B, and C. Each pair of parts A and B was joined together with a dowel. Some work was saved because the lower part of A was already mortised. The sides of the bed provided material for the sides and ends of the table. The leaves from an old table were used for the top.

Another old table made the fern stand illustrated; in fact, it is simply the table without the top, the end rails being cut down to give the desired width. A narrow strip of wood nailed on top of the rails provides a ledge for the rim of the metal lining. This copper or galvanized iron lining can either be made at home or ordered from a tin shop.

The attractiveness of the fern box is enhanced if a bird cage is hung over it. If possible, make and finish the bird cage of material to match the table and support it from an arm screwed to the back of the stand. Hinge the door of the cage and provide a small metal sand and gravel tray to slip into the cage through a slot at one side.



An old fashioned cupboard of walnut lent itself readily to being remodeled into a china closet, although it could just as well have been made a most attractive bookcase. This particular cupboard had tin panels in the sides and doors; these were replaced with wooden panels in the sides and with leaded glass in the doors.



Old table adapted as fern stand

Another table provided the material for a piano bench. This is a simple matter and calls for the making of only two mortise and tenon joints. The legs are two pieces glued and nailed together, the heads of the nails being set and the holes filled with sawdust and glue. An old fashioned clock case was turned into a fine medicine chest.

In refinishing such pieces as these, the

(Continued on page 106)



“Impossible” jobs easy when you use these tools

When you *have* to work where you “can’t”—when you want to save time and labor—you can solve your problem with “YANKEE” Tools.

“YANKEE” Ratchet Breast Drill No. 1555 has the “Yankee” DOUBLE Ratchet which keeps bit cutting *continuously* even if you can move crank only an inch either way. Fingertouch changes adjustment to Right- or Left-hand Ratchet. Plain Drill or gears locked. Two speeds, changeable without stopping work.

“YANKEE” Ratchet Hand Drill No. 1530 is only 10½ in. long; weighs only 20 ounces; slips into pocket—yet has same five ratchet adjustments as big “YANKEE” Drills. Drills up to 3/16 in. Magazine handle for bits.

“YANKEE” Ratchet Chain Drill No. 1500 does away with hand feeding—saves breakage of drill points. All you do is turn; automatic feed keeps pressure exactly right.

“YANKEE” Screw-drivers and Push Drills. Spiral Screw-drivers: Regular, Nos. 30, 31 and 35, and Quick Return, Nos. 130, 131 and 135 to work with one hand. Ratchet Screw-drivers drive screws like winding a watch: Nos. 10 and 11; also No. 15 with thumb turn. Plain Screw-drivers that won’t loosen in handles: No. 90 Standard, No. 95 Cabinet style; up to 30 in. blades.

Push drills: No. 44 adjustable Tension saves drill points; No. 41 without tension.

Some other “YANKEE” Tools

Ratchet Bench Drills	Push Brace
Ratchet Tap Wrenches	Bench Vises
Plain Hand Drills	Removable Base

Dealers everywhere sell “Yankee” Tools

Tool Book Mailed Free

Illustrates and describes all the ingenious “YANKEE” Tools for doing “impossible” jobs in drilling and tapping metal, boring in wood, and driving and drawing screw. Write for your copy today



NORTH BROS. MFG. CO.
Philadelphia, U. S. A.

“YANKEE” TOOLS

Make Better mechanics



The letter that raised my salary

I certainly was surprised when Mr. Jordan called me into his private office.

"I want to congratulate you, young man," he said, "on the splendid record you are making with the International Correspondence Schools. They have been sending me reports of your progress and this last letter is particularly fine."

"I want you to know that the firm never overlooks a man who cares enough about his work to study it in spare time. Beginning to-morrow, you are to take over Jim Hanna's position at an increase of \$50 a month. I wish we had more men like you."

Employers in every line of business are looking for men with ambition—men who really want to get ahead in the world and are willing to prove it by training themselves to do some one thing well. Prove that you are that kind of a man!

The way is easy. Without cost, without obligation, just mark and mail this coupon and get the full story of what the I. C. S. can do for you!

INTERNATIONAL CORRESPONDENCE SCHOOLS Box 7630-C, Scranton, Penna.

Without cost or obligation on my part, please tell me how I can qualify for the position or in the subject before which I have marked an X:

BUSINESS TRAINING DEPARTMENT

- | | |
|---|---|
| <input type="checkbox"/> Business Management | <input type="checkbox"/> Salesmanship |
| <input type="checkbox"/> Industrial Management | <input type="checkbox"/> Advertising |
| <input type="checkbox"/> Personnel Organization | <input type="checkbox"/> Better Letters |
| <input type="checkbox"/> Traffic Management | <input type="checkbox"/> Foreign Trade |
| <input type="checkbox"/> Business Law | <input type="checkbox"/> Stenography and Typing |
| <input type="checkbox"/> Banking and Banking Law | <input type="checkbox"/> Business English |
| <input type="checkbox"/> Accountancy (including C.P.A.) | <input type="checkbox"/> Civil Service |
| <input type="checkbox"/> Nicholson Cost Accounting | <input type="checkbox"/> Railway Mail Clerk |
| <input type="checkbox"/> Bookkeeping | <input type="checkbox"/> Common School Subjects |
| <input type="checkbox"/> Private Secretary | <input type="checkbox"/> High School Subjects |
| <input type="checkbox"/> Business Spanish <input type="checkbox"/> French | <input type="checkbox"/> Illustrating |

TECHNICAL AND INDUSTRIAL DEPARTMENT

- | | |
|---|--|
| <input type="checkbox"/> Electrical Engineering | <input type="checkbox"/> Architect |
| <input type="checkbox"/> Electric Lighting | <input type="checkbox"/> Blue Print Reading |
| <input type="checkbox"/> Mechanical Engineer | <input type="checkbox"/> Contractor and Builder |
| <input type="checkbox"/> Mechanical Draftsman | <input type="checkbox"/> Architectural Draftsman |
| <input type="checkbox"/> Machine Shop Practice | <input type="checkbox"/> Concrete Builder |
| <input type="checkbox"/> Railroad Positions | <input type="checkbox"/> Structural Engineer |
| <input type="checkbox"/> Gas Engine Operating | <input type="checkbox"/> Chemistry <input type="checkbox"/> Pharmacy |
| <input type="checkbox"/> Civil Engineer | <input type="checkbox"/> Automobile Work |
| <input type="checkbox"/> Surveying and Mapping | <input type="checkbox"/> Airplane Engines |
| <input type="checkbox"/> Metallurgy | <input type="checkbox"/> Agriculture and Poultry |
| <input type="checkbox"/> Steam Engineering <input type="checkbox"/> Radio | <input type="checkbox"/> Mathematics |

Name..... 6-26-22

Street Address.....

City..... State.....

Occupation.....

Persons residing in Canada should send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada.

"The Biggest Little Lathe Built"



THE
MONARCH
Junior
9" Engine
Lathe
2 1/2 ft. Bed
\$225

Here is a sturdy, small engine lathe built with the same quality construction that has made MONARCH Lathes standard the world over. Guaranteed to do any small work any other lathe will do and do it within 1/1000 of an inch accuracy. It will fit in any shop or home work room. Easy to learn to operate.

WRITE for Free catalog of MONARCH Lathes, which are built up to 30" swing.

THE MONARCH MACHINE TOOL CO.
401 Oak Street SYDNEY, Ohio


THE HOME WORKSHOP

Remodeling Old Furniture

(Continued from page 104)

first step is to remove the old finish and sandpaper the surface smooth. Any pieces of new wood should be scraped with a cabinet scraper before sanding. Where staining is necessary, a good acid or water stain can be used, but before applying it, a sponge dipped in hot water is rubbed over the wood to raise the grain.

The stain is followed by a thin coat of shellac, which, when dry, is sandpapered

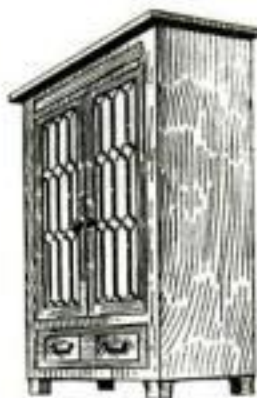

The bookcase with leaded glass doors, shown at the left, was made from a discarded cupboard. The piano bench below, which is another reclaimed piece, has a music compartment beneath the top



with fine and well worn sandpaper. The sanding smooths the grain previously raised by application of water. Wood filler is next applied with a brush and when it begins to lose its gloss, wiped off across the grain. Allow it to harden overnight. The filler should be the same color as the stain; for parts not stained, natural filler is used. One or two coats of shellac are then applied, and each rubbed with sandpaper.

The next step is to apply three coats of a good grade of varnish. This must be done in a warm room, free from dust. The last coat is rubbed with pumice stone and water, rottenstone and water, and finally rottenstone and oil, for a polished finish, and simply rubbed with pumice stone and water for a dull finish.

A variation in the method of finishing is to apply several coats of shellac, smoothing out each coat, and finish with two coats of wax, polishing them with a silk cloth. This makes a fine finish for walnut and has the advantage that it can be renewed easily from time to time. This is the finish used for the dressing table.



An old-fashioned kitchen clock made into a medicine cabinet

Furniture Features for April

AMONG the exceptionally helpful furniture articles in the April Home Workshop will be one on how to build a grandfather's clock, with designs for clocks ranging in value from \$15 to \$500.

Others will describe the construction of an inexpensive flat top desk, a girl's cabinet and writing desk, and a Colonial writing desk.

Unusual hints on finishing will be found in "Secrets of Making Realistic 'Antique' Furniture."

This describes in detail the little known tricks by which the home worker can duplicate the antique furniture finishes now so popular.



Electricity at your finger ends

Know the facts in Electricity. They mean more money and better position for you. Hawkins Guides tell you all you need to know about Electricity.

Every important electrical subject covered so you can understand it. Easy to study and apply. A complete, practical working course, in 10 volumes.

Books are pocket size; flexible covers. Order a set to-day to look over.

HAWKINS GUIDES

3500 PAGES
4700 PICTURES

\$1 A VOLUME
\$1 A MONTH

These books tell you all about —

Magnetism — Induction — Experiments — Dynamos — Electric Machinery — Motors — Armatures — Armature Windings — Installing of Dynamos — Electrical Instrument Testing — Practical Management of Dynamos and Motors — Distribution Systems — Wiring — Wiring Diagrams — Sign Flashers — Storage Batteries — Principles of Alternating Currents and Alternators — Alternating Current Motors — Transformers — Converters — Rectifiers — Alternating Current Systems — Circuit Breakers — Measuring Instruments — Switch Boards — Wiring — Power Stations — Installing — Telephone — Telegraph — Wireless — Bell — Lighting — Railways. Also many Modern Practical Applications of Electricity and Ready Reference Index.

SHIPPED TO YOU FREE

Not a cent to pay until you see the books. No obligation to buy unless you are satisfied. Send Coupon now — to-day — and get this great help library and see if it is not worth \$100 to you — pay \$1.00 a month for ten months or return it.

SEND NO MONEY

THEO. AUDEL & CO.,
72 Fifth Ave., N. Y.

Please submit for examination
Hawkins Electrical Guides
(Price \$1 each). Ship at once, prepaid, the 10 numbers. If satisfactory, I agree to send you \$1 within seven days and to further mail you \$1 each month until paid.

Signature.....
Occupation.....
Employed by.....
Residence.....
Reference..... P.S. MARCH '23

Easy to Learn Cartooning at Home

Earn \$60 to \$200
a Week in This
Fascinating
Profession

Sport, humorous, serious and animated cartoons—never have they been in such big demand! Successful cartoonists now earn \$3,000 to over \$100,000 a year. You can learn to draw these cartoons that SELL. Many of our students earn big money even while learning!

Easy Home-Study Method

Prepared by one of America's foremost cartoonists, this course teaches you to originate and draw all kinds of cartoons. You learn at home in spare time, yet all your work receives through the mail the individual help and criticism of prominent cartoon experts. Many successful cartoonists taught by this method.

Send for Free Book

Learn more about this method and the amazing opportunities open to you in this attractive fast-growing field. Our newly prepared Free Book is crammed with valuable information about this work, and explains fully this easy home-study method. Mail post card or letter for it TODAY!

WASHINGTON SCHOOL OF CARTOONING
1123 Marden Building Washington, D. C.

\$25.00 in Prizes

See page 6 in front of book for full details



THE HOME WORKSHOP

Painting Kit Keeps Materials Handy for Odd Jobs

TO MAKE easier the innumerable painting, enameling, and varnishing jobs that constantly arise in every home, a painting kit can be made from any stout box of good size. It should have two hanging plates, so that it can be hung on the wall in



the cellar, garage, or workshop, and a handle for carrying it from place to place.


The interior is fitted with small compartments for holding cans of paint, putty, wax, turpentine, oil, and the like, and hooks for the brushes, scraper, putty knife, tack hammer, glass cutter, and other tools. This assures all the material being available when needed. The box also serves as a step in the absence of a ladder.—G. A.

Simple Adjustment Improves Homemade Loudspeaker

RADIO fans who use the Baldwin type C telephone in connection with a horn as a loudspeaker may have felt the need, as did the writer, for some method of adjusting the diaphragm so that the modulation and volume of tone can be regulated. To accomplish this the device illustrated, which cost about \$1, has proved satisfactory. Speaking and singing come in clearly and naturally and band music has a good tonal quality that can be made low and

mellow or loud and brilliant, as desired, by a slight turn of the adjusting screw.

The first step is to bore a $\frac{1}{4}$ -in. hole in the rubber casing, as shown, to relieve the air cushion behind the diaphragm. A strip of $\frac{1}{8}$ -in. brass $1\frac{1}{4}$ in. wide is bent to form a

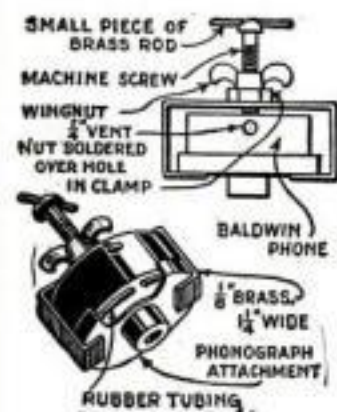

clamp and has a nut soldered over a hole in the center to take a bolt with a wingnut. A piece of brass rod or a nail is soldered to the bolthead as a handle.

This clamp is used to hold against the telephone one of the rubber caps sold by radio dealers for connecting phones with a horn or phonograph. The threads on the inside of the cap should be removed so that it will fit easily over the phone. A length of small rubber tubing should be obtained at a drugstore to serve as a gasket between the cap and the phone when assembling the attachment. Adjustments are made by increasing or decreasing the pressure of the clamp.—JOHN A. MAHON.



The Bell System's transcontinental telephone line crossing Nevada

Highways of Speech

Necessity made the United States a nation of pioneers. Development came to us only by conquering the wilderness. For a hundred and fifty years we have been clearing farms and rearing communities where desolation was—bridging rivers and making roads—reaching out, step by step, to civilize three million square miles of country. One of the results has been the scattering of families in many places—the separation of parents and children, of brother and brother, by great distances.

To-day, millions of us live and make our success in places far from those where we were born, and even those of us who have remained in one place have relatives and friends who are scattered in other parts.

Again, business and in-

dustry have done what families have done—they have spread to many places and made connections in still other places.

Obviously, this has promoted a national community of every-day interest which characterizes no other nation in the world. It has given the people of the whole country the same kind, if not the same degree, of interest in one another as the people of a single city have. It has made necessary facilities of national communication which keep us in touch with the whole country and not just our own part of it.

The only telephone service which can fully serve the needs of the nation is one which brings all of the people within sound of one another's voices.



"BELL SYSTEM"
AMERICAN TELEPHONE AND TELEGRAPH COMPANY
AND ASSOCIATED COMPANIES

One Policy, One System, Universal Service, and all directed toward Better Service

\$300 Profit Monthly from Battery Charging

Start your own money-making battery charging business NOW. No experience needed to make big steady profits with HB 8-hour Battery Charging. Universal demand, low operating cost.

10 Months to Pay on easy terms more than carried by your big monthly battery charging profits. Small cash payment brings HB 8-hour charger on long trial with money-back guarantee.

HOBART Bros. Company
Box P3 Troy, O.



"HOW I BEAT THE GAME"

The Inspiring Story of how one poorly paid garage mechanic won success, his own business and a big income. Tells how you can increase your salary from 100 to 500%. Send for it today FREE.

Ambu Engineering Institute
Dept. 43 2632 Prairie Ave., Chicago, Ill.

What You Can Do With this Boice Bench Saw

Boice-Built Bench Saw Model 140, illustrated here, provides a convenient, speedy, and economical way of doing hundreds of jobs requiring power and precision. Does cross-cutting, ripping, mitering, and grooving, with ease and accuracy. Special attachments enable machine to do grinding, sanding, drilling and dadoing.

Saws 7" dia. cut $2\frac{3}{4}$ " stock. Dado head 5" dia. cuts grooves $1\frac{1}{2}$ " deep x $\frac{5}{8}$ " wide, maximum. Screw adjustment elevates table for exact depth of cut. Machine will also cut brass, copper, bakelite, tubing, rods, carbon, and many similar materials. Motor $\frac{1}{2}$ h. p. ball-bearing. Sold on a positive Money-Back Guarantee.

Write today for circular and prices on this machine, and also on Boice Junior Bench Saw, 4" Jointer, 14" Bench Band Saw, Motors and larger bench saw

W.B. & J.E. Boice, Dept. P.S. 1 Toledo, Ohio
114-214 St.





Frosty weather and roving snowdrifts just add a new zest to the all-year sport of motorcycling.

None of the automobile's winter troubles bother the Harley-Davidson rider. His husky mount gives him full mastery over all road conditions, winter and summer—the same eager power, the same tremendous burst of speed, the same rushing get-away.

And the economy! No other gasoline vehicle can approach it—50 miles for a dollar, counting gas, oil, tires and all.

Your local dealer has the 1923 Harley-Davidson models, with their 10 improvements and reduced prices. Look 'em over! Or, write us for free literature. . . .

Harley-Davidson Motor Co.
Milwaukee Wisconsin



Harley-Davidson
World's Champion Motorcycle

Money-making sales opportunities in open territory. Write Desk A-2

Have You an Invention?

If so the WORLD PROGRESS will show you how to PROTECT AND PROFIT FROM YOUR IDEAS. This magazine is devoted entirely to the interests of inventors. It opens the mysteries of Science and Invention to the student of everyday problems. Sample Copy Free. Also send for free book

"What to Invent"

containing SUGGESTIONS TO INVENTORS from prominent inventors and scientists of inventions Needed. We invite manufacturers and promoters to address us regarding any inventions or patents they may want. We will publish such inquiries without charge. Address: World Progress Pub. Co., Inc., Room 203 Victor Bldg., Washington, D.C. One year's subscription \$1.00

1923 MODEL **INTRODUCTORY SALE**

Wonderful new engine—5 years ahead. Get full information about the

OTTAWA

Throttle Governor Herose Engine. Sold direct, at Factory Prices. Free Book—Write today!

OTTAWA MFG. CO.
1951-S King St., Ottawa, Kans.
Desk 1951-S Maple Bldg., Pittsburgh, Pa.

\$25.00 in Prizes

See page 6 in front of book for full details

THE HOME WORKSHOP

Tools for the Home Workshop

(Continued from page 77)

be held firmly and securely on a solid bed.

For very fine work, the cap iron should be set very close to the edge of the cutting iron. For coarse work, the cap iron can be set back as far as $\frac{1}{8}$ in. The bevel of plane cutters is at an angle of 25 degrees, as at B, Fig. 1, page 77. Approximately speaking, the bevel is twice as long as the cutter is thick. If the bevel is too short, the plane will not cut well, and if it is too long, the plane will jump and chatter.

In sharpening a cutter on the oilstone, avoid the common fault of making a short bevel, as at C, Fig. 1. Keep your hand down when rubbing on the stone to make a long bevel, thus obtaining a keen cutting edge. It goes almost without saying that in sharpening a smooth plane, fore plane, or jointer, only the corners of the iron are slightly rounded, as at E, Fig. 1, whereas the iron of a jack plane for rough work may have a slight curve, as at D, Fig. 1. Rabbit planes, like chisels, are perfectly square with sharp corners, as at F.

The pitch or angle of the iron in the plane varies according to the work that is to be done, and ranges all the way from about 80 degrees, as in tooth planes used for scraping surfaces in preparation for laying veneers, to 12 degrees in the case of some of the modern low angle block planes. In one case the action approaches scraping and in the other, shaving. For fine work, especially dressing cross grained or gnarled surfaces of hard wood, and for use with a shooting board in planing miters, a plane with a low angle cutter is useful.

The woodworker has, indeed, a wide range of choice in selecting fine planes and can get many varieties for special work, such as edge trimming planes, bullnose planes, cabinetmaker's edge planes, not to speak of universal plow and matching planes and molding planes.

Tricks in Sharpening Saws

Sharpening saws involves no more difficulty than sharpening planes when once the principles have been learned. A new saw is properly set and sharpened, so that all the woodworker has to do is to preserve the teeth in the same shape and condition as when new, so far as possible. Therefore, never let a saw get into bad shape before re-sharpening.

The teeth should first be "jointed" or made even in length by running over them a flat file held by hand or in a saw jointer, as at A, Fig. 2. This is not necessary every time the saw is filed, but should be done when the teeth have become noticeably uneven. Next, the teeth are set, although this is sometimes done before top jointing. Various saw sets can be obtained for this purpose. The points are bent alternately right and left, as in the original setting, and it is important not to set the teeth too far into the saw. In other words, give the teeth as little set as will serve. Fine saws, such as panel, dovetail, and tenon saws, sometimes are not set at all, the taper of the blade giving sufficient clearance. Begin at one end of the saw and set every other tooth. Then reverse the saw and set the remaining teeth. If the setting has been done unevenly, file the teeth edges on the side with a mill file.

The files to be used for sharpening are

(Continued on page 110)

RADIO

\$15 Down
\$10.00 A Month



FAMOUS
SENSITONE
LONG-DISTANCE

Regenerative RADIO Receiving Set

Built by Tri City Radio Electric Co. (Licensed under U. S. Patent No. 1,113,149 and pending letters Patent No. 807,388.)

The "Sensitone" brings in concerts, bands, lectures, market, crop and weather reports, sacred services and sermons, bedtime stories for children—all the wonderful programs of your pick of all the 500 broadcasting stations in the U. S. and Canada.

"Sensitone" Set is complete—including batteries, tubes, head-phone, antenna, wiring—connections—everything you need, ready to install, is equal to sets now sold at \$150.00 to \$175.00, yet our price is only \$95.00.

Set is shipped on receipt of the first \$15.00 payment. You are dealing with a responsible, old-established House. Ask any banker or business man to look up our rating in Dun or Bradstreet Reports.

Only a limited number of "Sensitone" sets will be sold on this easy-pay plan. Fill out coupon and attach check or money order for \$15.00. Circular free.

HAROLD R. WAKEM & CO.

836 W. Washington St., Chicago, Ill.

Harold R. Wakem & Co.,
836 W. Washington St., Chicago, Ill.

Enclosed you will find \$15.00 as first payment, upon receipt of which you will send me your complete Sensitone Radio Receiving Set, as described above. I agree to send you \$10.00 every thirty days thereafter, until the full purchase price is paid. This set is to remain the property of Harold R. Wakem & Co., until payments are completed.

Signed

Street address..... City.....

In the spaces below give the names of two references, banks or business houses preferred.

Name and Address

Name and Address



LEARN BY DOING

Every phase of all branches of

ELECTRICITY

taught by

Actual Practice

In America's foremost and oldest institution for trade training.

No Books Used

Individual Instruction.
Start Any Day

Write for FREE 64-page catalog

THE NEW YORK ELECTRICAL SCHOOL

40 West 17th St., New York City

Kellogg Radio Equipment for Better Results



Kellogg radio equipment for the radio fan has proved the best, because of its durability and accurateness. Being easily mounted and simple to operate makes it unusually efficient and brings the best results with the least effort.

For every dealer, Kellogg apparatus is the easiest to handle, because of its reliability, and because it is manufactured by the Kellogg Switchboard & Supply Company, who have had over twenty-five years' experience in manufacturing high grade telephone equipment. **The Kellogg dealer has this sign in his window:**

"We Guarantee Kellogg Radio Equipment"

HEAD SETS



No. 69A

The value of extremely light and very small head sets in Radio Receiving is most evident when using Kellogg head receivers, which, however, have proved as sensitive and thoroughly efficient as they are light in weight and small in size. The band, too, is especially adaptable and the simple receiver holders, which are held in place on the lower part of the head band by the spring tension of the metal,

can be instantly adjusted so as to place the receivers over the ears for the best hearing.

No. 69A Head Set 2400 ohms.....	each,	\$10.00
No. 69C Head Set 2000 ohms.....	each,	8.00
No. 74A Head Set 1000 ohms.....	each,	5.00

VARIABLE CONDENSERS



Decremeter type 11, 23, and 43 plate with and without vernier. Standard capacities. With this variable condenser the dial scale can be correctly calibrated. The amount of increase or decrease of the plate surface variation is always constant.

No. 601	11 plate with 5 plate Vernier. Knob—4" Dial	List each, \$6.75
No. 602	11 plate without Vernier. Less Knob and Dial	List each, 4.50
No. 603	23 plate with 5 plate Vernier. Knob—4" Dial	List each, 7.75
No. 604	23 plate without Vernier. Less Knob and Dial	List each, 5.50
No. 605	43 plate with 5 plate Vernier. Knob—4" Dial	List each, 8.75
No. 606	43 plate without Vernier. Less Knob and Dial	List each, 6.50

DIALS



All Bakelite. Non-warping, reinforced construction. $\frac{5}{16}$ " shaft with bushings for $\frac{1}{4}$ " and $\frac{3}{16}$ " shafts included.

No. 501	3" Dial.....	\$1.00
No. 502	4" Dial.....	1.25



No. 501

RHEOSTATS

The Kellogg rheostat is simple in design, having but one movable part. The resistance wire is carried on a rotor of high grade insulating material and the contact arms are so placed that a slight movement brings in the one-half turn of the wire, giving a vernier effect. The knob is the same type and size as the Kellogg dial.

No. 501 Rheostat.....	\$1.50
-----------------------	--------

VARIOMETERS



All Bakelite moulded variometer. Two rotor and three stator terminals. Standard wound. For panel or base mounting.

No. 501 Variometer.....	\$8.00
-------------------------	--------

All Kellogg Radio equipment is of the same high standard and is guaranteed by Kellogg—USE, IS THE TEST

KELLOGG SWITCHBOARD & SUPPLY CO., CHICAGO

THE HOME WORKSHOP

Tools for the Home Workshop

(Continued from page 108)

generally a 7-in. slim taper file for a 5, 6, or 7 pt. saw, a 6-in. slim taper file for a 8 or 9 pt. saw, and a 5-in. slim taper file for a 10, 11, or 12 pt. saw.

Clamp the saw in a saw vise with the point or toe at the left and, beginning at the left, file alternate teeth the entire length of the blade. Place the file well into the gullet at about the angle at which the teeth originally were filed, and see that the tooth that is set toward the other side of the saw is on the right side of the file. The position of the file on the teeth of a crosscut and rip saw is shown at B and C, Fig. 2. The file can be either held level, as at F, or tilted up, as at G. The latter angle is more difficult to maintain unless an adjustable vise is used, in which case the whole saw can be tilted so that the file itself may still be held level. The difference in the resulting shape of the teeth is indicated at D and E.

Ordinarily the point of the file is pointed a trifle toward the point of the saw, although a rip saw for general work can be filed straight across. The exact angle at which the file should point back is quickly learned by experience and varies with the sort of work that is to be done. Some mechanics, however, will tell you that the file should point toward the handle and, as a matter of fact, opinions differ, but if the file is pointed toward the handle, the point of the file must be tilted up as shown in the oblique position at G. When the saw is reversed to file from the other side, the same angles are maintained, only now the teeth that are set away are on the left of the file. The final step (H) is to pass a hard oilstone over the sides of the teeth lightly once or twice to remove any wire edges produced in filing.


Protecting Tools from Rust

The best protection for tools that I have found is to pass a rag saturated with good lubricating oil over all the saws, chisels, planes, and bits now and then. If this is done over both wood and steel every two or three weeks, the tools will look almost like new after years of service. If the steel should get damp with rain or otherwise, a piece of very fine sandpaper or fine pumice stone powder should be rubbed on with some oil. When tools are to be put away for some time, it is advisable to mix a little vaseline with the oil, to give it a greater body, and cover the steel parts liberally.

If dampproof drawers or closets are not available, a carpenter's "shoulder box" is a good substitute. By getting into the habit of slipping the tools into their individual racks or places every time one gets through using them, and if the oil rubs are not omitted, the tools can be kept in good shape even in a damp place. Boxes arranged to receive complete working sets of tools are now made at such reasonable prices that even mechanics prefer to buy rather than to make them. Bits, fine chisels, and gouges are done up in cloth rolls with pockets for each tool. These usually come with complete sets of tools, but they can easily be made at home.

When you strike a nail with a bit, restore the edge with an auger bit file or a fine warding file. Keep to the angle in which the bit was formed and never file on the outside. Do not file any more than is ab-

(Continued on page 112)

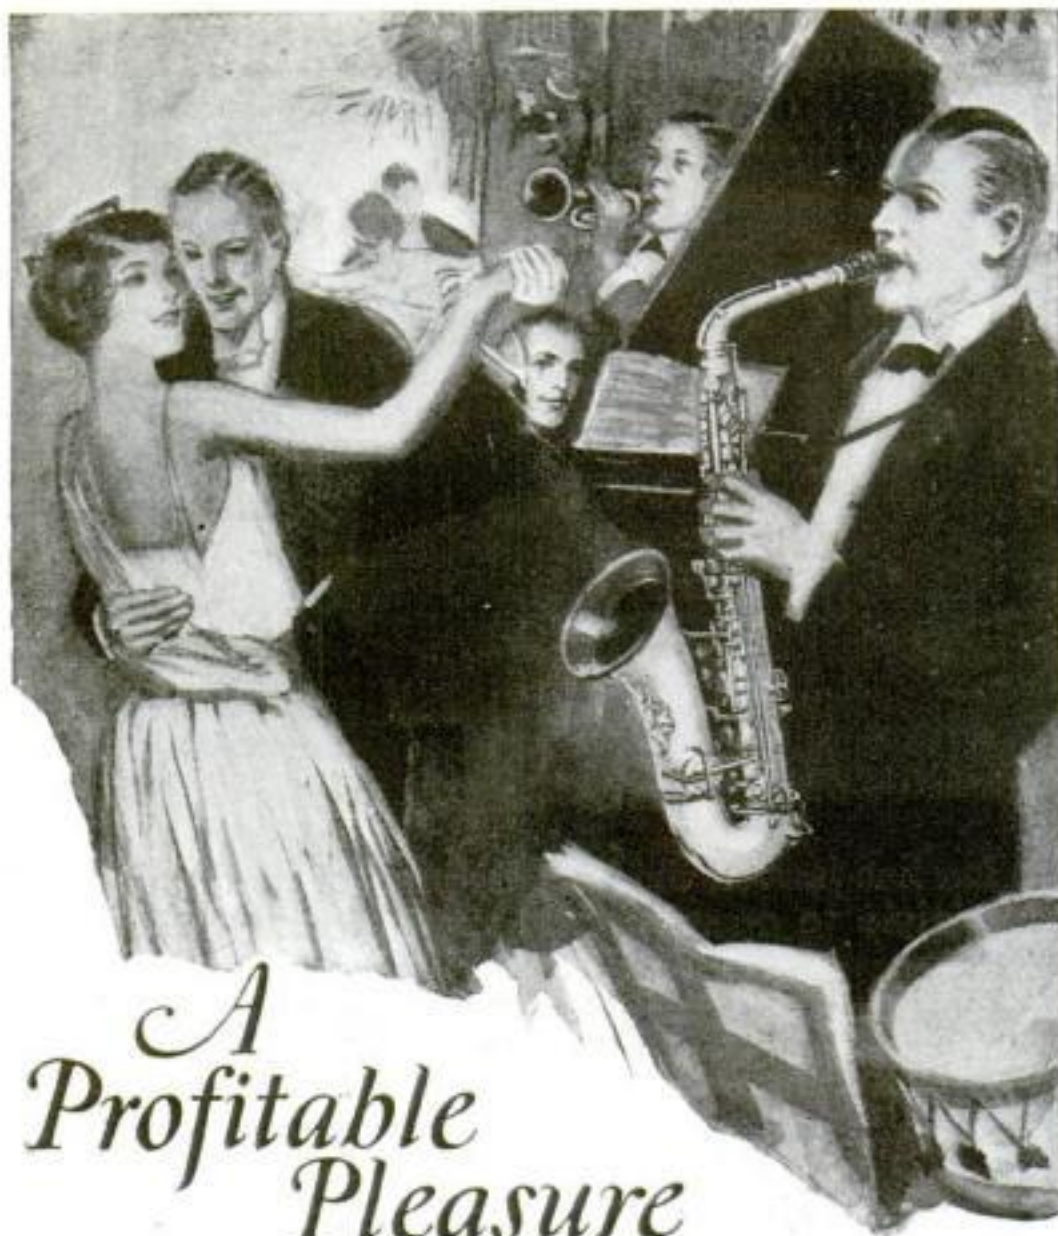

A Profitable Pleasure

CONN instruments place a world of pleasure, unnumbered opportunities for profit, at your command. For two-score years they have been recognized supreme by the world's greatest artists in concert bands, symphony, opera and popular orchestras.

Exclusive features make Conns easier to play. The most celebrated artists, including the great Sousa, use and endorse them because Conns are more perfect in tune and tone, have more reliable action, are easier to blow, more perfectly balanced, artistically designed and finished.

More Conn saxophones are sold than any other make in the world. Simplified key system, patented tuning device, perfect scale, and many other exclusive improvements make them "the choice of the great 'jazz' kings. You want the best; be sure you get a Conn.

FREE TRIAL, EASY PAYMENTS. Send now for information on how to get any Conn instrument for trial in your home. Conn is the only manufacturer of the complete instrumentation of a band.

Highest Honors at World Expositions. All Exclusive Conn Features at No Greater Cost.

Dealers and agents throughout the country. Factory branches in many large cities.

C. G. CONN, Ltd. 332 Conn Bldg. Elkhart, Ind.



Eddie Elkins of New York, (top) and Max Fisher of Los Angeles, (bottom) are among the popular orchestra directors who endorse Conn instruments.



CULTIVATE YOUR MUSICAL BUMP



You can now obtain *Condensite Celoron* *Radio Panels* cut in standard sizes

You can now get radio panels already cut to a size to fit your needs. For your convenience we are making Condensite Celoron Radio Panels in seven standard sizes. No longer will you have to wait and pay extra cost for having your panel cut to order.

These sizes have been so designed as to meet practically every need of the set-builder. Each panel comes trimmed and wrapped separately in glassine paper to protect the surface. They are all ready for immediate use. On every one are full instructions for working and finishing.

What Condensite Celoron is

Condensite Celoron is a laminated phenolic condensation product used by many of the

leading manufacturers of radio equipment. It has high insulation resistance, high dielectric strength, low dielectric losses and is easily worked. Because Celoron has these qualities it has received the approval of the U. S. Navy Department, Bureau of Engineering and the U. S. Signal Corps.

You can obtain any of these seven standard sizes:

- | | |
|------------------------|--------------------------|
| 1. 6x 7x $\frac{1}{8}$ | 4. 7x18x $\frac{3}{16}$ |
| 2. 7x 9x $\frac{1}{8}$ | 5. 9x14x $\frac{3}{16}$ |
| 3. 7x12x $\frac{1}{8}$ | 6. 7x21x $\frac{3}{16}$ |
| | 7. 12x14x $\frac{3}{16}$ |

Select the size you need for your set. If your radio dealer has not yet stocked them, ask him to order for you. Or write direct to us, designating by number the size you want. We can make prompt shipment.

To radio dealers: Write for special dealers' price list showing standard assortments

Diamond State Fibre Company

BRIDGEPORT (near Philadelphia) PENNSYLVANIA

BRANCH FACTORIES AND WAREHOUSES

BOSTON

CHICAGO

SAN FRANCISCO


Offices in Principal Cities

In Canada: Diamond State Fibre Company of Canada, Limited, Toronto.

CONDENSITE CELORON

STANDARD RADIO PANEL

Free Railroad Fare

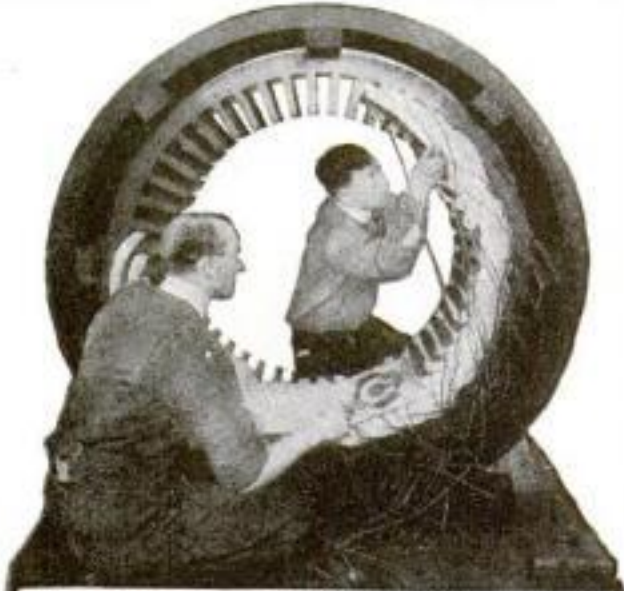

Student Winding a Stator

To the Great Shops of Coyne

We pay your railroad fare to Chicago—the Electrical Center of the World—from any place in the United States. Grasp the opportunity to see the country at our expense. Come to Coyne—learn electricity in 3½ months. Get a complete training so you can make big money as Power Plant Operator, Superintendent, Telephone man, Construction worker, auto, truck or tractor electrician, battery man, radio expert, or you can go into business for yourself as electrical contractor, dealer, auto ignition or battery expert and make from \$3,000 to \$20,000 a year. Hundreds of our graduates today are making big money and you can do the same if you grasp this opportunity—act now.

Learn Electricity In 3½ Months

No books or useless theory. You are trained on \$100,000 worth of electrical equipment. Everything from door bells to power plants. You work on motors, generators, house wiring, autos, batteries, radio, switch-boards, power plants—everything to make you an expert ready to step right into a position paying from \$45 to \$100 a week.

Radio Course FREE

We include the following free with the regular course:
(1) A complete course in auto, truck and tractor electricity and storage batteries. Greatest outlay of auto, electrical and battery equipment in the country.
(2) Course in Radio—the marvel of the age. Constructing, installing and operating. You can build your own wireless telephone set.
(3) A life scholarship in the Coyne school. You can stay as long as you wish and return for further training at any time in the future.

Earn While You Learn

We help students to secure jobs to earn a good part of their expense while studying.

Send Coupon Now

Don't delay a minute—send that coupon in right now for our big free catalog and full particulars of Free Railroad Fare offer. Act now!

B. W. COOKE, President

Coyne Trade and Engineering School
Dept. 1363, 1300-1310 W. Harrison St., CHICAGO

B. W. Cooke, Pres., Coyne Trade and Engineering School,
Dept. 1363, 1300-1310 W. Harrison St., Chicago, Ill.

Dear Sir: Please send me free your big catalog and full particulars of your special offer of Free Railroad Fare and two extra courses.

Name _____

Address _____

THE HOME WORKSHOP

Tools for the Home Workshop

(Continued from page 110)

olutely necessary or the bit will soon be useless.

I have often been surprised that amateur woodworkers do not make more use of hand screws. They can be put to innumerable uses and serve to increase one's thumbs and fingers. At least two good iron woodworker's clamps will be found invaluable at times for holding material when working it or gluing it up, especially if any furniture making is done in the home workshop.




The Tools I Use in My Home Workshop

By Joe V. Romig

MY WORKSHOP comes second only to my family in my affections. It is a dream shop—a boy's dream made possible through a man's work and development. My tools are chosen particularly for metal work, and with a few additional carpenter tools, they have served in the construction of many pieces of experimental and model work.

My vise (I could write a book about a vise alone) has 4-in. jaws that open 5 in., and a swivel base, which allows the work to be held in the most convenient position for filing and chipping. I take care of this most important tool, never pinching red hot iron between the jaws, or using a sledge hammer on it when bending rods or flats. I would

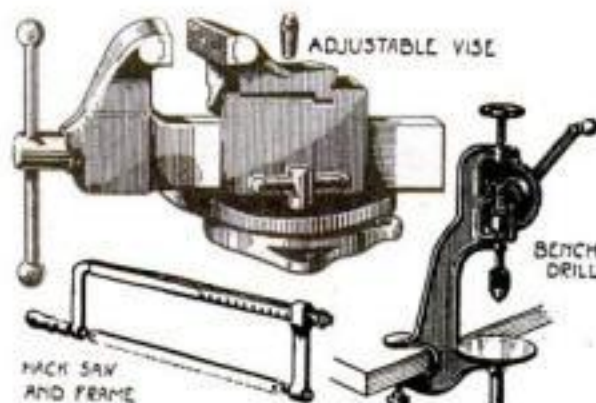

The style of vise, bench drill and hacksaw used by Mr. Romig

not permit my best friend to straighten a piece of steel on the flat of the slide. In buying a vise, I should always give preference to one with set-in steel jaws; this adds to the cost, but makes it possible to put in new jaws when the old play out.

My bench drill I chose with a view of practicability, and it holds drills from 0 to 3/8 in. It is equipped with drill pad and chuck. In order to lighten the strains of drilling large holes, I always drill a small lead hole first. I keep the tool well oiled and never try to make a punch press out of it by using a dull drill.

My hammers are many, three machinist ball peins, 1½, 1¼, and 1 lb., a pattern maker's hammer of medium size, a 2-lb. sledge hammer, and an assortment of small ball and straight pein hammers, from a few ounces up to half a pound. Included in my lot of hammers I must mention two wooden mauls, as well as a brass and a lead ham-

(Continued on page 113)

LEARN CARTOONING

It's Easy with
Landon Picture Charts



If you like to draw—develop your ability and become a successful cartoonist. Get the same instruction—the same help that has developed so many of the successful cartoonists of today.

Hundreds of nationally known cartoonists—young fellows such as Branner of the Chicago Tribune; Blosser, who draws "Freckles and His Friends"; Gene Byrnes, creator of "Reg'lar Fellers"; Dorman Smith of the N. E. A. Service; Thiele of Sioux City Tribune, and scores of others equally famous developed their ability, at home, through the famous

LANDON PICTURE CHART METHOD

Leading educators everywhere pronounce Landon Picture Charts as the greatest achievement in the teaching of drawing. No other method of teaching gives you such a thorough understanding of the fundamentals of drawing—none develops originality so rapidly.

Why Landon Course Is Superior

1. Landon students secure best cartooning positions.
2. Picture Chart Method is used exclusively by the Landon School.
3. This course teaches ORIGINAL drawing only. No copy work.
4. Individual attention and criticism of students' work.
5. Specialized instruction on originating cartoon ideas.
6. Price within reach of all. Easy payments arranged.

Write today for sample Landon Picture Chart, long list of successful Landon students and full information showing possibilities for you. Please state your age.

The Landon School

7051 National Bldg. Cleveland, Ohio

Easy to Play Easy to Pay



Clyde C. Doerr Director Clyde Doerr and His Orchestra, makers of Victor Records for dancing. Hear their Buescher instruments on your phonograph.

True-Tone Saxophone
Easiest of all wind instruments to play and one of the most beautiful. You can learn the scale in an hour's practice and play popular music in a few weeks. You can take your place in a band within 30 days, if you desire. Unrivalled for home entertainment, church, lodge or school. In big demand for orchestra dance music.

Free Trial You may order any Buescher instrument without paying one cent in advance, and try it six days in your own home, without obligation. If perfectly satisfied, pay for it on easy payments to suit your convenience. 75% of all popular phonograph records are played with Buescher instruments. Ask for pictures of the Nation's Record Makers.

Saxophone Book Free After nearly 300 years' supremacy, string instruments are almost entirely displaced by Saxophones in all nationally popular orchestras. Our Free Saxophone Book tells which Saxophone takes violin, cello and bass parts and many other things you would like to know. Ask for your copy. Mention the instrument interested in and a complete catalog will be mailed free.

BUESCHER BAND INSTRUMENT CO.
Makers of Everything in Band and Orchestra Instruments
3159 Buescher Block ELKHART, INDIANA

**Sax Invented the Saxophone
Buescher Perfected It**

THE HOME WORKSHOP

The Tools I Use

(Continued from page 112)

mer. It pays always to use a proper weight hammer for the work in hand. If a hammer head should prove too hard and chip off, I throw it away, as it is a dangerous tool to keep, and even if softened, it is already disfigured by the chipped face.

To get the best results out of a hammer, it must be fitted with a proper handle. Many hammers are bought with handles that remind me only of a stick of wood. By shaving a handle down to a thin section below the head, a snappier action is secured. To preserve the wood, I always give the handles several coats of shellac. Never use the hammer handle to bump or pound metal parts, as this will often cause the handle to crack or split; use a maul instead.

My set of chisels contains all shapes and sizes, from 1-16-in. cape to 1 1/4-in. straight cold chisels. Many of them I forge out of octagon chisel steel, and temper according to the use I intend to put them to. If I break off a corner of the cutting edge, I always throw the broken chisel into the redressing box, and when enough accumulate, I dress them all at one time.

My files, of which I have almost all of the ordinary shapes and sizes, are kept according to size in a partitioned tray. The larger sizes are kept on the bench, as they are used the most. Each file has its own handle, and is never used without it. I clean my files with a wire brush and soft pine wood wipers, and never pound them on metal.

Micrometers and Measuring Tools

My measuring tools consist of a 2-, 3-, and 6-in. rule, also a 12-in. combination set, the square and bevel protractors which have hardened and ground faces. A 50-ft. steel tape line, of known and guaranteed accuracy, is used for long measurements.

My micrometers are of 1-, 2-, and 3-in. sizes, and a set of 2- to 8-in. inside micrometers are used on internal work. A set of 3- and 6-in. dividers, together with a metal beam trammel set, serve for my layout work. I prefer spring calipers to the solid type, and I have them in 3-, 6-, and 12-in. sizes.

One of the handiest tools is the drill gage for measuring drills and wire rods. This tool also converts the drill size into thousandths of an inch. All small tools, such as screw and thickness gages, center punches, surface and depth gages, scrapers, and the like, are kept in a felt-lined tool box.

Oilstones of three different grits are kept in covered cases, to prevent dust from clogging their surfaces.

My taps and dies are kept in three boxes; the fine threads have a die of 3/4-in. diameter, and the larger sets cut from 3/8 to 1/4 and 1/4 to 1/2 in. threads respectively. These sets have loose dies that can be replaced when worn out. I always try to keep at least two taps of each size on hand, so as to have one in reserve in case of breakage. My oil can is a close companion to all my thread-cutting tools, as oil makes for better threads and saves the taps and dies.

My hacksaw frames, of which I have two, take blades from 6 in. in length up to 12 in. The blades are chosen for the work in hand, and for general all around use, I prefer a medium fine toothed blade. For cutting brass bushings and iron pipe and tubes, I always use a fine tooth saw. Oil is good to

(Continued on page 114)

Auto Mechanic Makes \$5200 Net Profit 1st Year



HERE'S THE PROOF

About a year ago we graduated from the Greer School. Realizing the automobile business offered many splendid opportunities, we decided to go into business for ourselves. As our capital was limited, we were obliged to start on a small scale. Business came in right from the start. At the end of a year our net profit was \$5,200. Our business has already outgrown our present quarters and we must seek a larger building.
(Signed) Carlson & Simon.

Unlimited Opportunities for Auto Mechanics

Here's an opportunity to go into business for yourself. Greer men are making good money—they get the pick of waiting positions and are successful. You have the same chance to succeed. Greer training will fit you in a few short weeks to take a position or start a business of your own, paying good money right from the start.

WE PAY YOUR RAILROAD FARE

This special offer is made to fill the openings that now exist.

GREER TRAINING MOST COMPLETE

Greer College of Automotive Engineering is a residence trade school, not a correspondence school. Thorough, successful training by actual practice. Master Mechanic instructions insure personal, individual training. Practical shop work on autos, trucks, tractors, all types of motors, ignition and starting systems.

PICK YOUR JOB

Select the position you want—make up your mind to come to GREER College and I will show you the easy road to lasting success. Thousands have stepped into the ranks of Big Pay Men through GREER Training.

Mechanics.....	\$ 50-\$ 75	Demonstrators.....	\$ 75-\$100
Foreman.....	75- 100	Shop Managers.....	125
Electrical Ignition and		Salesmen.....	125- 200
Starting Experts.....	100- 125	Sales Agencies.....	Up to \$10,000 a year

Positions paying as above are now open. Start a business of your own and make more. All GREER Graduates awarded Diplomas of Certified Automotive Engineers.

FREE BOOK—Newest and most interesting—"How to Succeed in the Automobile Business." is a book you'll find a real guide to a better job at bigger pay. Fill out the coupon and mail today.

GREER COLLEGE

of Automotive Engineering

2043 South Wabash Avenue,
Chicago, U. S. A.



MAIL THIS FREE BOOK COUPON
Erwin Greer, President
Greer College of Automotive Engineering,
2043 So. Wabash Ave., Chicago,
Send me your Free Book "How to Succeed in the Automobile Business" and information regarding Special Offer and Free Transportation.
Name.....
Address.....

\$25.00 in PRIZES

See top of page 6 in front of book for full details

Deafness



Perfect hearing is now being restored in every condition of deafness or defective hearing from causes such as Catarrhal Deafness, Relaxed or Sunken Drums, Thickened Drums, Roaring and Hissing Sounds, Perforated, Wholly or Partially Destroyed Drums, Discharge from Ears, etc.

Wilson Common-Sense Ear Drums

"Little Wireless Phones for the Ears" require no medicine but effectively replace what is lacking or defective in the natural ear drums. They are simple devices, which the wearer easily fits into the ears where they are invisible. Soft, safe and comfortable. Write today for our 168 page FREE book on DEAFNESS, giving you full particulars and testimonials.

WILSON EAR DRUM CO., Incorporated

704 Inter-Southern Bldg. LOUISVILLE, KY.

RADIO & AUTO Storage Batteries CHARGED

FROM LAMP SOCKET, for a Few Cents with an F-BATTERY BOOSTER a Full Wave Magnetic Rectifier for 105-125 Volt 60 Cycle A.C. Type A-B Charges 6 Volt "A" & Auto & Up to 120 Volts Of "B" & Lamp Speaker Storage Batteries In Series Inductively At Home Overnight. Disconnecting and Multiple Connections Unnecessary. No Grounds. All Circuits Separate. Nothing Like It Made. F-F BATTERY BOOSTERS are Complete Portable, Automatic Charging Units. Infusible Carbons Rectifying Brushes Maintain Uninterrupted Service, at Constant Efficiency, while Full Wave Design Delivers Razed Taper Charge. Screw Plug in Lamp Socket. Snap CLIPS on Battery Terminals & Battery will be Charged in Morning. No Skill is Required. F-F BATTERY BOOSTERS Last Lifetime & Save More Than Cost. POPULAR PRICES.



Type 6 charges A 6 Volt Battery At 6 amperes \$12
Type 12 charges 12 Volt Battery At 6 amperes \$15
Type B charges B Batteries Up to 120 Volts \$15
Type A-B is Combination of Types 6 & B \$12
Type 105 charges 6 Volt Batteries At 10 amperes \$20
Type 16120 charges 12 Volt Batteries At 10 amperes \$28
Type 16120 is Combination of Types 105 & 16120 \$28
3 Lower Types are for heavy Batteries, where time is limited. SHIPPING Weights Complete with AMMETER & BATTERY CLIPS \$1 to \$5 lbs. Purchase from Your DEALER, or Mail Check for Prompt Shipment. Grid for Parcel Post, and Postage & Insurance Charges or Charges Auto & Radio Batteries. ORDER Type desired Shipped C.O.D. ORDER Now or WRITE Immediately for FREE BOOSTER Bulletin 17, THE FRANCE MFG. CO., CLEVELAND, OHIO, U. S. A. Canadian Distributor: The Jack V. Elliot Co., Hamilton, Ontario, Canada.

THE HOME WORKSHOP

Auto Repairing Tools

(Continued from page 114)

able to keep my car out of repair shops. The tools that I consider indispensable to the car owner who desires a collection of his own are indicated in bold face type in the list that follows:

FOR THE ENGINE:

Spark plug wrench
Spring compressor, adjustable
Valve grinder
2 open end valve adjusting wrenches
Main bearing socket wrench
Connecting rod socket wrench
Carbon scraper, 10 in.
Wire scratch brush, 12 in.
Contact file, 5 in.
2 contact adjusting wrenches

FOR WHEELS AND WHEEL BEARINGS:

Hub cap socket wrench
Bearing adjustment open end wrench
Rim bolt socket wrench
Wheel puller, screw type

FOR THE CLUTCH:

Clutch spring adjusting open end wrenches
Offset screwdriver, 6 in.

FOR THE TRANSMISSION:

Transmission bearing adjusting open end wrench and socket wrench

FOR THE UNIVERSAL JOINT:

Socket wrench
Open end wrench

FOR THE BRAKES:

Wingnut spanner wrench
Open end wrench

FOR THE DIFFERENTIAL:

2 differential adjusting spanners

FOR GENERAL PURPOSES:

Screwdrivers, 6 in. and 12 in.
Adjustable end wrench 8 in.
Ball peen hammer, 3 lb.
Adjustable pliers, 5 in. and 7 in.
Set of double end wrenches to fit bolt sizes from 3/16 to 3/4 in.
Set of sockets with wrench handle for same sizes. (These are obtained less expensively in full sets.)

It should be noted that the spanners and large sockets may be obtained through the car agencies, as they are frequently special sizes.

For my garage tool equipment I have the following:

1-ton chain hoist
3-ft. creeper
1-ton jack
Bench vise, 4-in. jaws
Emery grinder, 5-in. wheel
Soldering copper, 5/8 lb.
Breast drill, 18 in.
Tin snips, 8 in.
Blowtorch, 1-qt. size
Hacksaw, adjustable
Hand vise, 6 in.
Pipe wrench, 10 in.
Monkey wrench, 14 in.
Rawhide hammer, 1 1/2 in. face
Ball peen hammer, 1 1/2 lb.
Screw pitch gage
Feeler gage
Firm joint calipers, inside and outside, 6 in.
Rule, English and metric, 2 ft., fourfold
Rule, steel, 6 in.
Octagon reamer, 6 1/2 in.
Rose countersink

File, half round, 8 in.
File, 3-square, 6 in.
File, flat, bastard, 10 in.
File, square, bastard, 10 in.
Chisel, half round, 3/4 in. blade
Chisel, diamond point, 5/32 in. point
Chisel, cape, 3/4 in.
Chisel, cold, 1/2 in.
Solid punch, 5/32 in. point
Prick punch
Pin punches, 5/32 in. and 1/4 in.
Center punch, 3/8 in.
Cotterpin puller
Tire tool
Tire chain tool
Bearing scraper, 8 in., 3 sq. hollow ground
Screwdriver, offset, 8 in.
Clamps, 4 and 8 in.
Oilstone

SPARK-PLUG WRENCH
SPRING COMPRESSOR
VALVE GRINDER
VALVE ADJ. WRENCHES
MAIN BEARING WRENCHES
CONNECTING ROD WRENCH

DIFFERENTIAL ADJUSTING
SPANNER WRENCHES

WHEEL
PULLER

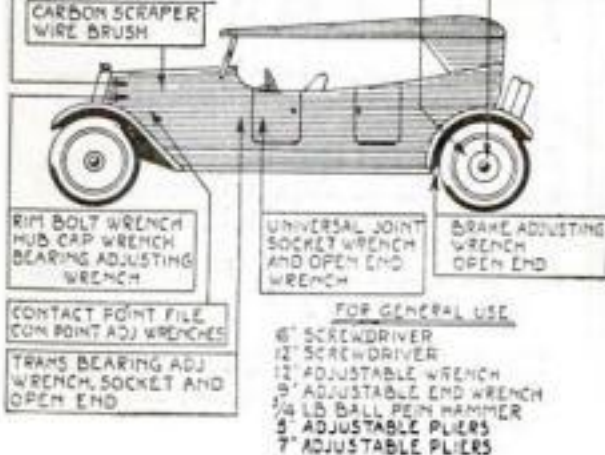


Diagram showing that each tool in Mr. Luers' kit has a specific use

It should never be forgotten that the automobile represents an extremely successful mechanical construction. The essen-

(Continued on page 116)

You can become a Practical Electrician By Home Study

To get an interesting, big-pay job in the Electrical field is not as hard as you may think. Anyone with an ordinary education can learn Electricity through our 50 weeks' course in Practical Electricity, especially prepared for home-study. Thousands of men holding big electrical jobs got their start through spare-time study at home. Their success proves that you, too, can learn Electricity without leaving home or giving up your present job.

Simple, Easy Way to Learn

Everything is explained in straightforward, simple language. You learn easily, rapidly and thoroughly. With every course we furnish a free Laboratory Outfit for practical testing and experimenting. You can become an Electrical Expert in less than a year, ready to take one of the many big-pay jobs that are always waiting for men who really know Electricity.

Send Coupon for Free Book

This is your opportunity. Don't let it pass. Fill in coupon and mail today. Get our big free illustrated book "Your Future in Electricity." It describes the opportunities in the Electrical Field—tells you all about the course and the fine free Laboratory Outfit—reproduces many letters from successful students, with photographs of these big-pay Electricians working in their present jobs.



"Don't tell me you never had a chance!"

"Four years ago you and I worked at the same bench. I realized that to get ahead I needed special training, and decided to let the International Correspondence Schools help me. I wanted you to do the same, but you said, 'Aw, forget it!' You had the same chance I had, but you turned it down. No, Jim, you can't expect more money until you've trained yourself to handle bigger work."

There are lots of "Jims" in the world—in stores, factories, offices, everywhere. Are you one of them? Wake up! Every time you see an I. C. S. coupon your chance is staring you in the face. Don't turn it down.

Right now over one hundred thousand men are preparing themselves for bigger jobs and better pay through I. C. S. courses.

You can join them and get in line for promotion. Mark and mail this coupon, and find out how.

INTERNATIONAL CORRESPONDENCE SCHOOLS Box 7629-C, Scranton, Penna.

Without cost or obligation on my part, please tell me how I can qualify for the position or in the subject before which I have marked an X:

BUSINESS TRAINING DEPARTMENT

- | | |
|---|---|
| <input type="checkbox"/> Business Management | <input type="checkbox"/> Salesmanship |
| <input type="checkbox"/> Industrial Management | <input type="checkbox"/> Advertising |
| <input type="checkbox"/> Personnel Organization | <input type="checkbox"/> Better Letters |
| <input type="checkbox"/> Traffic Management | <input type="checkbox"/> Foreign Trade |
| <input type="checkbox"/> Business Law | <input type="checkbox"/> Stenography and Typing |
| <input type="checkbox"/> Banking and Banking Law | <input type="checkbox"/> Business English |
| <input type="checkbox"/> Accountancy (including C.P.A.) | <input type="checkbox"/> Civil Service |
| <input type="checkbox"/> Nicholson Cost Accounting | <input type="checkbox"/> Railway Mail Clerk |
| <input type="checkbox"/> Bookkeeping | <input type="checkbox"/> Common School Subjects |
| <input type="checkbox"/> Private Secretary | <input type="checkbox"/> High School Subjects |
| <input type="checkbox"/> Business Spanish | <input type="checkbox"/> Illustrating |
| <input type="checkbox"/> French | |

TECHNICAL AND INDUSTRIAL DEPARTMENT

- | | |
|---|--|
| <input type="checkbox"/> Electrical Engineering | <input type="checkbox"/> Architect |
| <input type="checkbox"/> Electric Lighting | <input type="checkbox"/> Blue Print Reading |
| <input type="checkbox"/> Mechanical Engineer | <input type="checkbox"/> Contractor and Builder |
| <input type="checkbox"/> Mechanical Draftsman | <input type="checkbox"/> Architectural Draftsman |
| <input type="checkbox"/> Machine Shop Practice | <input type="checkbox"/> Concrete Builder |
| <input type="checkbox"/> Railroad Positions | <input type="checkbox"/> Structural Engineer |
| <input type="checkbox"/> Gas Engine Operating | <input type="checkbox"/> Chemistry |
| <input type="checkbox"/> Civil Engineer | <input type="checkbox"/> Automobile Work |
| <input type="checkbox"/> Surveying and Mapping | <input type="checkbox"/> Airplane Engines |
| <input type="checkbox"/> Metallurgy | <input type="checkbox"/> Agriculture and Poultry |
| <input type="checkbox"/> Steam Engineering | <input type="checkbox"/> Mathematics |
| <input type="checkbox"/> Radio | |

Name..... 6-26-22

Street Address.....

City..... State.....

Occupation.....

Persons residing in Canada should send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada.

60% of Market Price

Will Buy Diamonds Here

This 3/4-1/16 Ct. perfectly cut diamond, a snaggy, blazing solitaire, at \$42.65 among bargain in our line. See the many big saving values some as low as \$50.00 per Carat, other higher per Carat bargains. This 75 year oldest largest Diamond Bankers firm in all the world lends money on diamonds. Thousands of unpaid loans and other bargains. Must sell NOW.

Why Pay Full Prices

Costs Nothing To See Any Diamond sent for absolutely free examination at our risk. No obligation. No cost to you.

Latest Listings—Unpaid Loans. Sent Free. Write Today. Describes Diamond Bargains in Detail. Gives cash loan values guaranteed. Explains unlimited exchange privilege.

Joe. De Roy & Sons, 4796 DeRoy Building, Pittsburgh, Pa.

Only Opposite Post Office

TYPEWRITERS

17¢ a Day soon pays for a genuine visible Underwood or L. C. Smith rebuilt typewriter. Save \$20 to \$30 on famous Larkin Easy-Payment plan. Handsomely finished. 5 Year Guarantee. 30 Days' Trial. Send for FREE Book TODAY.

Larkin Co. Inc.
Desk TP5M-123 Buffalo, N. Y.

THE HOME WORKSHOP

Auto-Repairing Tools

(Continued from page 115)


tials for its uninterrupted service are the maintenance, as far as possible, of its condition when new, with only such adjustments as are due to wear and the renewal of broken parts that have become crystallized through continued stress and vibration. Since the tool equipment is solely for the upkeep of the automobile, it should be selected with care and not guessed at.

Good care of the tools is essential. Each of my tools is placed in a definite location, either in the car or in the garage tool rack, and I am never at a loss to find it when needed. Each tool is carefully wiped of grease, grit and water, and is never abused. That is, a wrench is not used as a driver or a hammer to loosen screw parts. I take care to use wrenches that fit the flats of a bolt or nut, and never make an oversize wrench do, because that has a tendency to spring the jaws.

The edge tools are kept sharp, particularly the nose of the screwdriver. I never pound on wrench handles, and make it a practice to keep tools off the seats and off the painted surface of the car, and never throw them down. When a job is complete, I put the tools back in proper order and, therefore, automatically obtain a check on them to see that none has been overlooked.

Improvising a Generator Drive

THE flexible shaft drive shown in the accompanying drawing was used to turn a generator for the electrical system of an automobile on which a burned-out gener-

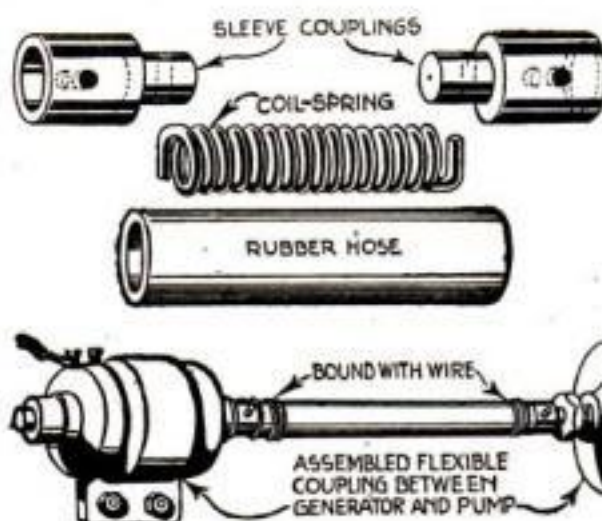

ator had been replaced by one that was too large to go into the bracket.

The former coupling had consisted of a circular disk held between two sleeve fasteners. The improvised coupling was made by riveting into two sleeves the ends of a heavy spring. Over this spring a section of rubber hose was placed. This drive compensated for lack of alignment of the parts and provided a serviceable coupling.—G.A.

Your Auto Tool Box

NEXT in importance to having a good kit of tools for your car is to have a convenient toolbox or compartment where they will be instantly accessible for road repairs. Several ideal arrangements for accomplishing this will be described in a forthcoming number by Harold F. Blanchard, POPULAR SCIENCE MONTHLY'S auto expert.

Why Good Dancers Are Popular

Everyone admires and wants to dance with the person who knows the latest steps. There is no need of being a wallflower! Arthur Murray, America's foremost dancing teacher, has perfected a wonderful new method by which you can learn any of the newest steps in a few minutes and all of the dances in a short time.

Even if you don't know one step from another, you can quickly and easily master any dance without music and without partner, right in your own home. Your success is guaranteed. The Vanderbilts and scores of other socially prominent people have chosen Mr. Murray as their dancing instructor. More than 60,000 people have learned to become popular dancers through his easy learn-at-home methods.



New, Easy Way

To show you how easily and quickly you can learn the new way, Arthur Murray has consented to send, for but a limited time, a special course of sixteen dancing lessons for only \$1.00. This extraordinary offer is made to prove you will enjoy learning the newest steps in the privacy of your own home—without onlookers to embarrass you. You need not send any money now. When the postman hands you the 16-lesson course, just deposit \$1 with him, plus a few cents postage, in full payment. If within five days you are not delighted, return the lessons and your money will be promptly refunded.

This unusual offer may not be made again. Write today for the sixteen-lesson course. If you prefer, send the dollar now and we will pay the postage. The lessons will be sent promptly, in plain cover. Learn at home and surprise your friends. Act now and be a good dancer soon.

Arthur Murray

Studio 618

801 Madison Ave., N. Y. C.


The Only Authentic Book on the Construction and Operation of

"The Armstrong Super-Regenerative Circuit"

Described fully in 52 pages including 21 photographs and Hook-Ups in simple non-technical radio language.

This set built by the author

George J. Eltz, Jr. E. E., A. I. E. E.

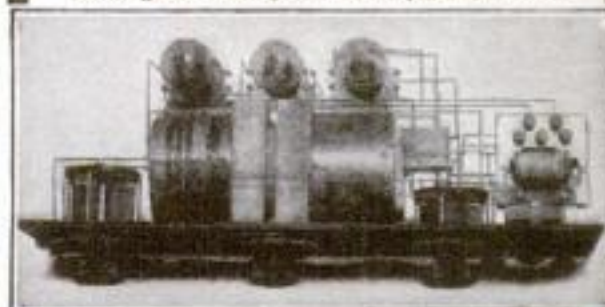

Complete Description of Each of the Three Circuits Invented by

MAJOR E. H. ARMSTRONG, E. E.

How to Change a Regenerative Circuit to a Super-Regenerative Circuit

Price \$1.00 Per Copy

Mailed or at your dealer DO NOT SEND STAMPS

RADIO DIRECTORY and PUBLISHING CO.

45 Vesey Street (Room 106) New York City

PATENTS

Booklet Free Highest References
Promptness Assured Best Results

Send drawing or model for preliminary examination of Patent Office records and report as to patentability.

All Business Given Prompt and Proper Attention

WATSON E. COLEMAN, Patent Lawyer,
624 F St., Washington, D. C.

Delivered to you Free

for 30 days trial on approval. Your choice of 44 Styles, colors and sizes of the famous Ranger Bicycles. Express prepaid. Low Factory-to-Rider Prices.

12 Months to Pay if desired. Many boys and girls easily save the small monthly payments.

Tires, wheels, lamps, and equipment at half usual prices. Write for remarkable factory prices and marvelous offers.

Mead Cycle Company Write us today for free catalog
Dept. B109, Chicago




THE HOME WORKSHOP

Rolling "Your Own" with the Simplest Cigarette Machine

A SMALL piece of tracing cloth and a meat skewer are all that is necessary to make a cigarette rolling "machine." The device is amusingly simple and yet turns out cigarettes that are rolled as well as machine made "butts." The cigarettes can be made thin or thick, tight or loose at will.

The skewer or other small wooden rod of about the same diameter is split in half for 3 in. from one end. In this split is glued one

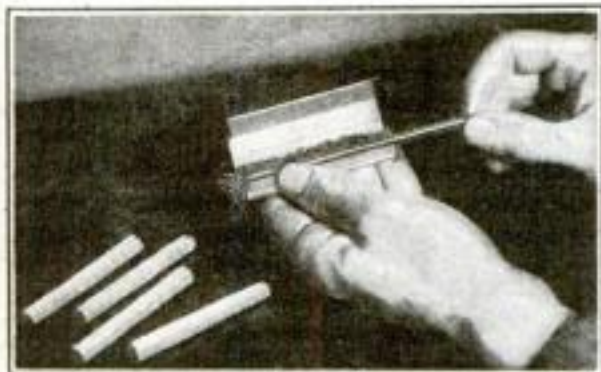

How the tobacco and paper are placed in the "machine" when starting to roll

long edge of a piece of tracing cloth $2\frac{1}{4}$ by 3 in., so that the device somewhat resembles a miniature flag.

To roll a cigarette, the paper, preferably with a gummed edge, is placed on the tracing cloth and the tobacco is distributed evenly on it as if for hand rolling. The outside edge of the tracing cloth is brought over the stick so as to form a loose cylinder, with tobacco and paper inside and the end of the



Rolling a cigarette step by step. Paper and tobacco are placed on the tracing cloth and the handle is turned forward, as shown in the three upper views. Turning the handle backward then releases the cigarette

stick is then turned in the direction shown in the diagram until the cigarette is wrapped as tightly as desired.

Next, the handle is turned in the opposite direction while the fingers of the left hand control the movement and prevent the cigarette's loosening. This results in the tracing cloth being unwound from the cigarette, and it is then necessary only to stick down the edge of the paper.—R. S. G.

How You Can Make Two Remarkable Radio Sets

COMPLETE details of how to assemble a dry-cell regenerative vacuum tube set at a cost of \$20 or less, including phones and aerial, will be given in the April Home Workshop.

Another feature will tell how to build a receiving set with three stages of audio frequency amplification that provides extraordinary tone volume and clearness on the loudspeaker.

The Automobile Business is THE Business to Get Into

Twelve Million Automobiles Need Service

Twelve Million Cars, sixty million tires, millions of batteries and electrical systems to overhaul, repair and keep in running order. Get that picture well fixed in your mind, then you can begin to appreciate WHY the AUTOMOBILE Business is THE Business to get into.

Think of the opportunities in the repair and resale end of the business alone! Thousands of additional garages, battery repair shops, tire shops and welding shops are needed to care for these millions of cars.

Try to picture in your mind what

Earn \$2000 to \$10000 Yearly



YOU CAN DO IT! Thousands of M.S.A.S. graduates are doing it right now! Both the manufacture and repair of these machines require skilled men—trained men—men who KNOW. The automobile industry employs millions of men and more are needed all the time. Factories, garages and service stations are continually asking us for M.S.A.S. Trained Men who can fill responsible

jobs with good pay. The M.S.A.S. Trained Man doesn't have to worry—and wonder. He KNOWS—and that means SUCCESS.

Courses Complete and Practical

Our courses thoroughly cover every branch of the Automobile Business. And our teaching is made practical through practical training on the actual machines. When you have finished our Course you will be thoroughly trained in the construction, upkeep, repair and operation of autos, trucks, tractors, gas engines and farm lighting plants. That's why M.S.A.S. graduates are always in demand. They are thoroughly trained—they KNOW!

Here's Why You Should Come to Detroit

When you think of automobiles you think of Detroit, the Auto Center, and it is only natural to think of the M.S.A.S. in the Auto Center when you think of Automobile Training. This is the Heart of the Auto Industry—the Automobile Center of the World. Practically 79% of the automobiles are made in the Detroit district. This is a big advantage for M.S.A.S. Students.

They get the benefit of hearty co-operation from the big factories. They learn manufacturing methods first handed; they listen to lectures and talks by factory men; they learn about cars in a manner impossible away from the factories. That is why M.S.A.S. Trained Men are in demand with big factories and service stations.

This is Your Opportunity

Don't say you never had a chance. A Big One faces you right now! Get Busy! Send the coupon today for full information about the opportunities in the Automobile Business.

Michigan State Automobile School
583 Auto Bldg.
3729 Woodward Ave., DETROIT, MICH.

BUCHSTEIN'S FIBRE LIMB



Guaranteed 5 Years—Send for Catalog Today.

P-BUCHSTEIN CO., 113 6th St., S., MINNEAPOLIS, MINN.

Endorsed by Big Factories Read These Letters

HUDSON MOTOR CAR COMPANY

DETROIT, MICH., U. S. A.
This school is thought very highly of by the automobile men of Detroit. You will make no mistake by entering for a course.



BUICK MOTOR COMPANY

We believe the Michigan State Auto School located at Detroit would best meet your requirements, as its course in technical training is most thorough and complete in every detail.

THE STUDERBAKER CORPORATION OF AMERICA

We do not know a better automobile school that we could recommend to you than the Michigan State.

Read What the Auto Factories Say

The letters above written by Factory Executives speak for themselves. M. S. A. S. courses are the standard in automobile training. The M. S. A. S. is the only FACTORY ENDORSED SCHOOL.

Mail This Coupon NOW!

Michigan State Automobile School,
583 Auto Bldg., Detroit, Mich.

Please send me your Free Catalog and tell me about the opportunities for earning big money in the automobile business.

Name

Street

City

State

Free Vocational Chart

Are you in the right vocation? Are you satisfied? Could you make more money and be happier in another line of work? Undecided? Our Vocational Analysis will solve these problems for you. Mathematically accurate—scientifically sound. Ask for FREE Vocational Self Analysis Chart PS I. Mailed upon request.

VOCATIONAL SERVICE BUREAU
8th floor, 20 E. Jackson Chicago, Ill.

PATENTS

IF YOU HAVE AN INVENTION and DESIRE TO LEARN HOW TO SECURE A PATENT, send for Our Guide Book. HOW TO GET A PATENT, sent free on request. Tells our Terms, Methods, etc. Send model or sketch and description of your invention and we

will give our opinion as to its patentable nature.

NAME

STREET

CITY

STATE

RANDOLPH & CO.

130 F St., N. W., Washington, D. C.

U.S. PATENTS

FREE →
FORM & BULLETIN
EVERY INVENTOR
SHOULD USE:



Registered Attorneys

SERVICE

Without charge or obligation, we will inform you on any questions you may put to us touching on patent, trade mark and copyright law, not requiring research. You may ask, "Should I protect myself by a patent, or register under the trade mark or copyright laws? What kind of a patent should I obtain? What will it cost? Will it sell?" and many other questions that may occur to you. These are vital points to consider, and questions will be cheerfully answered.

IMPROVEMENTS WANTED

Ask for copies of unsolicited letters from parties desiring to purchase outright new inventions and patents or to obtain licenses to manufacture and sell on a royalty basis.

EVIDENCE OF CONCEPTION

Before disclosing your invention to any one send for blank form "Evidence of Conception," to be signed and witnessed. A sample form together with printed instructions will show you just how to work up your evidence and establish your rights before filing application for patent. As registered patent attorneys we represent

hundreds of inventors all over the U. S. and Canada in the advancement of inventions. Our schedule of fees will be found reasonable. The form "Evidence of Conception," sample, instructions relating to obtaining of patents and schedule of fees sent upon request. Ask for them—a postcard will do.

LANCASTER & ALLWINE

274 Ouray Building Washington, D. C.
Originators of Form "Evidence of Conception"

**DON'T
LOSE
YOUR
RIGHTS**

Man and His World

(Continued from page 30)

In addition to these things that all protoplasm does, any particular variety of it usually has a lot of other things that it is able to do. For instance, nerve cells can produce and transmit nervous signals. The cells in the green leaves of plants can make sugar. One and the same cell—for instance, the cell of any one-celled creature—is often able to do 20 or 30 separate things at the same time.

Why is this? How can one little piece of living matter do all these different things—breathe, eat, grow, reproduce?

Scientists have not yet solved this mystery, but they are beginning to believe that it is because there exists inside of protoplasm a very complicated kind of structure, something like a group of tiny separate compartments. In these compartments the varied activities of the cell can go on separately and yet side by side.

Think of a factory in which automobiles are made. In it are many separate rooms where workmen hammer out the various metal parts or shape them or put them together. And imagine a giant so huge that this whole factory measures in comparison no more than a thousandth of an inch. This giant would never see the single rooms of the factory at all. He would see only the entire building. He would notice that it ate coal and iron and that it gave birth to little moving particles that ran about by themselves. But how all this was done he would not be able to guess.

Invisible Workshops of Life

Toward protoplasm all of us are giants. Its actions seem mysterious to us because we are not yet able to see into its separate workshops. When we learn to do so, we shall discover, scientists believe, that the things that go on in them are merely physical and chemical action, quite like the processes with which we are familiar.*

And meanwhile we can trace a good deal of the past history of living things. We begin with the little slime speck of the ancient tide pools, a speck not unlike the modern cell, but far simpler in its structure. From this speck we believe that life grew and diverged, through eons of time, into the plants and animals we know today.

What caused this divergence? It was caused by that fundamental law of life, the struggle for existence; the survival of the fittest; the rule that only the strong, the able, the inventive shall be allowed to live; the rule that in one form or another dominates the world and its inhabitants to this day.

This universal struggle for existence began even with the living slime specks in the primeval sea. In the beginning, all of these specks were dependent for food upon what was brought to them by the water in which they lived. Presumably this food consisted of chemicals of various kinds, things that Nature had made before she began to produce life itself. Now, as the number of the living specks increased, the supply of food in the water began to run short. This was the beginning of competition. Some of the specks—we would call them the stronger ones—began to get more than their share of food; others began to get less. Then began what we know as effort.

* A few of these processes have been duplicated. For instance, Dr. Alexis Carrel, famous research worker of the Rockefeller Institute, has been able to keep living cells alive and growing for years outside the body from which they came. Dr. D. T. MacDougal, of the Carnegie Institution, has devised a piece of apparatus, illustrated on page 21 of this issue, which duplicates many of the actions of a living plant cell.

PATENTS
Send us sketch or model for patentability opinion and exact cost of patent. Our book "How to Obtain a Patent" Sent Free on request. It tells how to apply for Patents, Trade Marks, Foreign Patents, Copyrights, etc.; gives information on Patent Procedure; tells what every inventor should know. Thousands of inventors, who are our clients, are our references.
CHANDLEE & CHANDLEE, 25 Years' Experience
437 7th St. Washington, D. C.

Only \$45.00 For This Job Complete
Save exorbitant freight rates and one-half original cost by buying Ford 50 cc after bodies knocked down. Simple, complete instructions furnished, all parts cut to exact fit. Any one can assemble this job. Complete with hood, radiator shell, instrument board, upholstery, metal parts, wood parts, bolt screws, etc. Flat radiator shell furnished made up. Designed low with lack of wind resistance. Price set up \$90. Further particulars on request.
The Central Auto Supply Co. Eng. Dept. 122 Louisville, Ky.



LEARN TO DRAW AND

MAKE MONEY

Study in the School that has the Long Established Reputation

W. L. EVANS' Method is Simple and Easy to Learn

Some of the cleverest cartoonists are former students. They had no experience before enrolling, but worked at the lessons during their spare time, and found **CARTOONIST EVANS' METHOD** "easy to learn" and are now making good money. It is not hard to learn to draw originals when shown in a practical way.

The School is recommended by well known cartoonists because they know the students are handled right.

If you like to draw and want to be able to sell your drawings, send a sample of your work (either a copy or an original) and let us see what you can do. We will send you the portfolio of cartoons and full details about the school.

The Course is NOT EXPENSIVE

THE W. L. EVANS SCHOOL OF CARTOONING
825 Leader Bldg. Cleveland, Ohio

High School Course in Two Years

Lack of High School training bars you from a successful business career. This simplified and complete High School Course—specially prepared for home study by leading professors—meets all requirements for entrance to college and the leading professions.

30 Other Courses
No matter what your business inclinations may be, you can't hope to succeed without specialized training. Let us give you the practical training you need. Check and mail Coupon for Free Bulletin.

American School
Drexel Ave. and 58th St.
Dept. H.-375 Chicago

Send me full information on the subject checked and how you will help me win success.

- | | |
|-------------------------------|-----------------------------|
|Architect |Lawyer |
|Building Contractor |Machine Shop Practice |
|Automobile Engineer |Photoplay Writer |
|Automobile Repairman |Mechanical Engineer |
|Civil Engineer |Shop Superintendent |
|Structural Engineer |Employment Magager |
|Business Manager |Steam Engineer |
|Cert. Public Accountant |Foremanship |
|Accountant and Auditor |Sanitary Engineer |
|Bookkeeper |Surveyor (and Mapping) |
|Draftsman and Designer |Telephone Engineer |
|Electrical Engineer |Telegraph Engineer |
|Electric Light and Power |High School Graduate |
|General Education |Fire Insurance Expert |
|Vocational Guidance |Wireless Radio |
|Business Law |Undecided |

Name
Address

Man and His World

Some of the specks found that they could get more food by *trying* for it. They found it no longer advisable merely to drift about aimlessly, letting the water bring them whatever it happened to contain. And now the living specks made a fundamental decision, a decision that has affected the entire course of life since that day. Some of them made one decision; some made another. This was the first divergence, the first branching of the tree of life.

One group of the specks learned how to move. If there was not enough food where they happened to be, they learned to go somewhere else where food might be more plentiful. The specks of this group became animals. They discovered the spirit of adventure. They invented purpose and purposeful movement.

Another group of the specks took another road. They discovered that it was possible to manufacture their own food. They learned how to absorb sunlight, how to take up certain very simple chemicals, abundant in the water, and how to use the sunlight to convert these chemicals into food.

Plants—the World's Food Factories

These specks became plants. They still have this power of making food. Green plants still absorb sunlight in their leaves and they still use this, as we shall see in a later article, to manufacture food materials out of simple non-living chemicals. The green plants are the chemical food factories upon which all life depends.

For the primeval specks that decided to be plants, motion was unnecessary. Indeed, it might be a handicap. So these primeval plants learned to sit still. They developed rootlike projections that held them fast to the rocks.

This was the origin, we believe, of the first great distinction between the plant stem and the animal stem. Another distinction followed very soon. The animal cells, reproducing rapidly, began to grow short of food again.

Certain of their cousins, you remember, had settled down on the sea bottom near the shore where the light was good and had established food factories. They had become plants. The animal-like specks cast a greedy eye on these supplies of food. What more natural than that they should decide to steal it? They learned to eat the plants.

We animals have done this ever since. Those pirate specks, our ancestors, invented our particular way of meeting a need of food. They took it away from some one else. To this day all animals live by eating plants or by eating other animals who, in turn, have lived on plants. Plants alone know how to feed themselves. They know it so well that they are able also to feed the rest of the world.

At first the distinction between plants and animals was probably not a sharp one. Some of the specks were undecided for a while which path to take. They combined the characters of plants with those of animals. Indeed, there are still alive some tiny water creatures like this—creatures that are somewhat like animals, somewhat like plants. They are green and they can feed themselves, as plants do, but they can move about as animals do.

Scientists call these creatures flagellates because they possess one or more longish threadlike attachments called flagella, which is a Latin word that means whip lashes. The creatures wave these

(Continued on page 120)

CLARENCE A. O'BRIEN

PATENT ATTORNEY

REGISTERED IN UNITED STATES PATENT OFFICE

MEMBER OF THE BAR OF

SUPREME COURT OF UNITED STATES COURT OF APPEALS DISTRICT OF COLUMBIA
 SUPREME COURT DISTRICT OF COLUMBIA UNITED STATES COURT OF CLAIMS

PRACTICE CONFINED TO PATENTS AND TRADE MARKS

EXPERIENCE

SCIENCE
INVENTION
INDUSTRY

Protect Your Ideas

Any new article, machine, design or improvement thereof, or any new combination of parts or improvements in any known article which increases its efficiency or usefulness, may be patented, if it involves invention.

IF YOU HAVE ANY NEW IDEAS

which you feel are useful, practical and novel, take prompt action toward protecting your rights. If you have invented any new machine, or new combination of parts or improvement, or new process or design,

SEND DRAWING, MODEL OR DESCRIPTION
of it for information as to procedure to secure protection.

WRITE TODAY FOR BLANK FORM
"Evidence of Conception"

to be returned to me with drawing, description or model of your idea. Promptly upon receipt by me of your idea I will write you fully as to procedure and costs.

NO CHARGE FOR THE ABOVE INFORMATION

All communications are held in strict confidence. My personal, careful and thorough attention is given to each case. I offer you efficient, reliable and prompt service—based upon practical experience. Highest references.

Write to-day for free book "How to Obtain a Patent." This book will give you valuable information, and it may save you much time and effort. Send for it NOW.

My practice is devoted exclusively to United States and foreign patents and trade marks. Very probably I can help you. Write today.

CLARENCE A. O'BRIEN, Registered Patent Attorney
1800 Southern Building Washington, D. C.

CLARENCE A. O'BRIEN, 1800 Southern Bldg.,
Patent Attorney, Washington, D. C.


Please send me your free booklet "How to Obtain a Patent," and blank form "Evidence of Conception" without any obligation on my part.

Name.....

Address.....
(WRITE CLEARLY)

SERVICE

EFFICIENCY
INITIATION



Do You Want A Real Loud Speaker?

READ a few of the many letters we have received from Dictograph Loud Speaker users. You, too, can enjoy the utmost in Loud Speakers if you own one.

HANNIBAL, MISSOURI

"We have been using your Radio loud speaker and the results appear to the writer better than we can obtain using any other style speaker. Station from Cuba and from Manitoba come in clear and free from the usual tin effect heard in so many of the speakers now on the market."

MEMPHIS, TENNESSEE

"Believing that a meritorious article should be endorsed, I wish to state that I am using one of your Dictograph Radio Loud Speakers. It brings in music and lectures from Maine to California and from Canada to Cuba. Before buying I compared it side by side with another loud speaker costing more than double the price of yours. It has a beautiful, clear tone and is very neat in appearance. I "tune in" directly through the horn and do not find any need for the head set."

MONTEREY, CALIFORNIA

"I purchased one of your Radio Loud Speakers in San Francisco and have tried it out thoroughly and am more than pleased with it. I can hear Portland, Oregon—Los Angeles and Salt Lake City in every room in a seven room house in which the radio outfit is upstairs, and some rooms very large. Other stations up to 1000 miles or more can be plainly heard."

ATLANTA, GEORGIA

"I find your Loud-Speaker very satisfactory indeed, it is the only real good loud speaker I have ever seen for home use. It works perfectly and is all you claim for it."

ORFORD, NEW HAMPSHIRE

"Your Radio Loud Speaker works fine. I was a little afraid about getting it, as I got stung on one so called loud speaker which I cannot make work; but not so with the Dictograph, as it works good as a loud speaker that I heard that cost more than five times as much, and I think the music is better."



PRICE \$20.00

Complete with 5 ft. flexible cord, adapted for receiving sets with Detector and two stages of Amplification.

If your dealer doesn't carry the Dictograph Loud Speaker write us direct.

DICTOGRAPH PRODUCTS CORPORATION
 Suite 1311, 220 West 42nd Street (Branches in all principal cities) New York City

WANTED IDEAS

Inquiries from Manufacturers and Others Who Are Looking for Good Ideas

PROTECTED BY PATENTS

are constantly being received. Manufacturers are always interested in any new device for which there is a market, which fills a long felt need, makes production possible at a lower cost, or which will do the work BETTER. There is undoubtedly a great demand to-day for really worth while inventions.

Your First Step

If you have an idea, send immediately for my blank form "TO RECORD YOUR INVENTION." You should serve your own best interests by filling out and signing this form before you disclose your invention TO ANY ONE. This document will help you determine and establish evidence of invention before filing an application in the U. S. Patent office. A copy, with full instructions, will be gladly sent on free request.

New Book "Successful Patents" Sent FREE

Every man who has an invention or ever hopes to have one, should send for a copy of my book, "SUCCESSFUL PATENTS." It tells what everyone should know about patents, trade-marks, copyrights, etc. It describes my methods, fees and terms, gives information relative to assignment or sale of rights and instructions in detail. Mail coupon to-day for a free copy of this book—or a postcard request will do.

To the Man with an Idea

I offer a comprehensive, experienced, efficient service for his prompt, legal protection, and will endeavor to aid him in the commercial development of his proposition—my service is distinguished by over 12 years' successful practice, and by thousands of satisfied clients and by reasonable fees.

Send sketch, or model, and description, for advice as to cost, opinion as to its patentable nature, etc. Preliminary advice gladly furnished without charge.

COUPON

RICHARD B. OWEN, Patent Lawyer

Main Office, 6 Owen Bldg., Washington, D. C. Branch Office, 2276-D, Woolworth Bldg., New York City

Please send me, without charge, or other obligation, a copy of your book, "SUCCESSFUL PATENTS," your form "TO RECORD YOUR INVENTION," and information concerning patents, etc.

Name.....Address {

PATENTS

As one of the oldest patent firms in America we give inventors at lowest consistent charge, a service noted for results, evidenced by many well known Patents of extraordinary value. Book, Patent-Sense, free. Lacey & Lacey, 648 F St., Wash., D.C. Estab. 1869.

PATENTS

TRADE-MARKS COPYRIGHTS

Send for our free book of patent information

Beale & Park 804 F St., Washington, D. C. 16 S. Broad St., Philadelphia, Pa.

CAN YOU

think of a simple, practical idea that will fill one of the many requests we have on file for new inventions? It may mean a fortune for you. Thousands of things are needed Right Now. Your brains can help. Send to-day for our great new book—"Inventions and Trade Marks, Their Protection and Exploitation"—and learn more about making money from ideas than you ever knew before. It tells many things that are wanted, too. A postal will do—it is free.

We help our clients, without charge, to get the dollars out of their ideas—having facilities none others possess.

Advice free. Don't delay—get the book at once.

AMERICAN INDUSTRIES, INC.

201 Patent Dept., WASHINGTON, D. C.

PATENTS
ADVERTISED
For SALE FREE
In INVENTION And
MANUFACTURING
SUPPLEMENT.

Published for the man with an idea. Send for free sample copy. One year's subscription 50c.



Lights the
road for
1/8 of a mile!

EVERY man needs this reliable electric lantern around the home, in the garage, for his workshop. And men who shoot and camp will find this lantern essential. This super lantern throws a beam of light three city blocks. The adjustable focus screw enables you to obtain all degrees of light from a strongly concentrated beam to a broadly diffused light. The sturdy aluminum case and soundly made connections make it impervious to weather and hard knocks.

To find anything on the high shelf—for use in the cellar—to work under your automobile—and for scores of other purposes you will find the ABLETT ELECTRIC LANTERN indispensable.

Operates on two ordinary dry cells, giving it exceptionally long life.

This lantern is made absolutely waterproof, moistureproof and gasproof; and it will last a lifetime. Order one today. Enclose check or money order—or we will ship C. O. D., complete with batteries for \$8.50 Less batteries 7.50

CHARLES R. ABLETT CO.
199-201 Fulton St. New York, N. Y.

Man and His World

(Continued from page 119)

whip lashes about in the water and thus drag themselves along. Many bacteria that cause disease in our body also move by means of flagella, and scientists suspect them of being degenerate descendants of these primeval plant animals.

The surviving green flagellates give us, probably, some idea of what the primitive plant-animal cell was like, though we must not imagine that it was exactly like them. Every creature alive today has precisely as long an ancestry as we have. The flagellates have changed less than most others.

The real question is why we ourselves have changed so much. Why are not all of us still one-celled water creatures yanking ourselves along by waving threads?

The answer is that we have been forced to change. As the flagellates multiplied in the primeval sea, they began to compete with one another. There was not room for an unlimited number of them. So some of them began to live in colonies and became sponges. Others formed tubelike groups and became worms.

The Drama of the Living Past

Presently there were too many worms and some of them were forced to crawl up out of the sea into the rivers. These, as we shall see later, became fish. And after a while there were too many fish, so that some of them had to leave the water and live on shore. And out of these land dwellers there came, in the course of ages, man.

Thus runs the story of evolution, the great drama of the living past. The history of the rise of life; of lowly worms creeping about in the mud, of fish learning how to breathe air, of great reptiles dragging their 60 tons of flesh and bone along the shores of ancient swamps, of curious little catlike creatures peopling the forests of lands now buried under arctic ice, of how these creatures grew, at last, some of them to be monkeys, some apes, some men.

This is the story we shall tell in later chapters of this serial. But first we must tell how the story started.

Life began, we say, in the primeval sea, but what produced this sea? Was the earth always cool enough for life? Or, if it was once molten, what melted it? How did it grow and how was it born? What pulled it, in the beginning, out of the very body of the sun? And how did this sun of ours come into being among the great assembly of the other stars?

How did it happen, in short, that there came together here on this little dust mote of an earth, in the midst of the vast void of space, exactly that combination of heat and light and water and chemicals that made it possible for life to start?

This is one of the greatest mysteries still tempting the imagination of mankind. How modern science has begun to penetrate this mystery; how it has picked up the beginnings of the trail of life, the trail that leads down through unnumbered ages to end at last in man, will be the subject of our next chapter.

For Further Reading

The subject of this article is fascinatingly discussed in Dr. Henry Fairfield Osborn's "The Origin and Evolution of Life" (Charles Scribner's Sons, New York).

An excellent brief account of the evidence for the evolutionary idea is "Evolution and Animal Life," by Dr. David Starr Jordan and Dr. Vernon Kellogg (The Macmillan Co., New York).

On the scientific questions involved in the origin of life, a good short summary is "The Origin and Nature of Life," by Professor Benjamin Moore, published as Volume 63 of the low-priced Home University Library (Henry Holt & Co., New York).

THE HOME WORKSHOP

Making Money as an Amateur Portrait Photographer

LIKE millions of others, I owned a cheap camera and soon filled an album with interesting poses of every member of the family, but, as my wife often complained, the portraits were not "finished" like those taken "at the photographer's."

Critical comparison brought out the fact that the homemade portrait, if taken out of doors, usually showed "sun squints" and too much contrast between light and shadow, while

those taken inside included sections of furniture or wall paper that could not qualify as good backgrounds. The professional photographer's portraits, on the other hand, usually started at the bottom with a solid, dark color that gradually "dissolved" into a



A homemade portrait

soft, evenly lighted likeness of the sitter, against a background that was either a dark shade or a dark, hazy design.

To obtain a solid, dark colored foreground that would "dissolve" into a likeness of the subject proved a simple matter. I procured a piece of black cardboard as wide and twice as long as my camera, and to one end of it, at right angles, I fastened another piece of black cardboard by means of a paper "hinge." This piece was the same width and high enough to reach the center of the lens, as illustrated. The middle of the upper edge was then cut away on a curve of the size and shape desired for the finished print, and "toothed."



The vignette attachment

A piece of dull black oilcloth, 3 by 4 ft., tacked to a window shade roller, furnished a neutral dark background in conveniently portable form.

I placed my subject in a good diffused light, hung the oilcloth behind and set the camera on a table with the "saw teeth" directly in front of the camera at a distance of about 1 in. less than the length of the camera. Then I located the subject in the finder and made the exposure.

Because of their good quality and reasonable price, added to the fact that they can be conveniently made in the subject's own home, these amateur portraits, mounted in neat but inexpensive folders, enable me to offer my customers a service that fits in midway between the often unsatisfactory homemade "snapshot" and the higher priced work of the professional photographer.—GLEN WILLIAMS, Detroit, Mich.

INSTEAD of wiping off surplus paint from a brush on the edges of a paint can, drag the brush against a wire run across the center of the can at the top. The wire can be run through two holes punched in the tin with a nail.

PATENTS TRADE-MARKS AND COPYRIGHTS

SPECIAL OFFER FREE OPINION AS TO PATENTABLE NATURE

Before disclosing an invention, the inventor should write for our blank form "Record of Invention." This should be signed and witnessed and if returned to us together with model or sketch and description of the invention, we will give our opinion as to its patentable nature.



Our Three Books Mailed Free to Inventors

Our Illustrated Guide BOOK

HOW TO OBTAIN A PATENT

Contains full instructions regarding U. S. Patents. Our Methods, Terms, and 100 Mechanical Movements illustrated and described, Articles on Assignment or SALE OF PATENTS, Patent Practice and Procedure, and Law Points for inventors.

OUR TRADE MARK BOOK

Shows the value and necessity of Trade-Mark Protection and gives information regarding Trade-Marks and unfair competition in trade.

OUR FOREIGN BOOK

We have Direct Agencies in all Foreign Countries. We secure Foreign Patents in shortest-time and lowest cost.

LIST OF PATENT BUYERS SENT FREE

IDEAS WANTED: Send for LIST OF PATENT BUYERS, containing unsolicited Letters from Manufacturers and others WISHING TO BUY meritorious patents. There is a great demand for NEEDED

INVENTIONS. We endeavor to assist OUR clients in the commercial development of their inventions.

SPECIALIZATION Our Staff

The field of invention is so vast that it is impossible for any one to become an expert in all the different classes of invention. For this reason Victor J. Evans & Co. employ a number of patent lawyers and mechanical experts who have been selected for their special knowledge and ability in certain lines of invention.

THE VALUE OF YOUR PATENT

Will depend much upon the skill and care with which your case is prepared and prosecuted in the United States Patent Office. Every case receives our best efforts, and our work is done consistently, skillfully and thoroughly, as is evidenced by the many unsolicited letters of commendation received from our clients. We will furnish lists of clients from any State in the Union for whom we have secured patents.

Our New York, Philadelphia, Pittsburgh, Chicago, and San Francisco Offices

We have established for the benefit of our clients Branch Offices in New York City, Philadelphia, Pa., Pittsburg, Pa., Chicago, Ill., and San Francisco, Cal. These branch offices located in these large commercial cities, together with our Main Office located near the U. S. Patent Office, in Washington, enable us to more promptly handle the business of our clients, particularly as the branch offices are in constant touch with the Main Office.

Highest References—Prompt Attention—Reasonable Terms

FREE COUPON



VICTOR J. EVANS & CO. Patent Attorneys

New York Offices
1007 Woolworth Bldg.

Philadelphia Offices
714-715 Liberty Bldg.

Pittsburgh Offices
514 Empire Bldg.

Chicago Offices 1114 Tacoma Bldg. San Francisco Offices, Hobart Bldg.

Main Offices, 760 9th Street, Washington, D. C.

Gentlemen: Please send me FREE OF CHARGE your books as described above.

Name.....Address.....

Brooks Variable Condenser

Two Ribbons Furnished
Easily Interchangeable

(Max. .0005—Min. .00001)
(Max. .001—Min. .00001)

Adaptable to all receiving
circuits.
Shorting of plates eliminated.
Nicety of Adjustment.
Straight line capacity curve.
Low internal resistance.
Loud Signals.

Retail \$4.75
Price 4 each
Complete with Dial

Manufactured by


METRIC METAL WORKS

of

American Meter Company, Inc.
ERIE, PA.

**JOBBER
WANTED**

Write for Prices
and Discounts

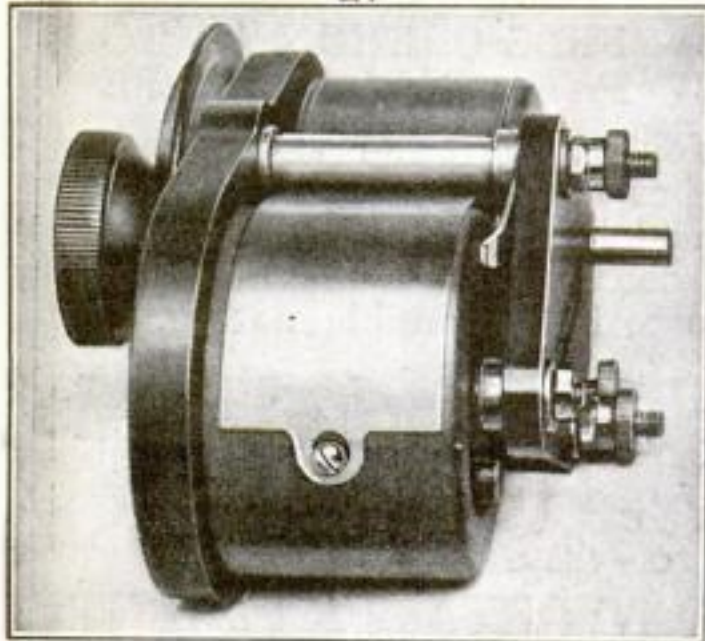

MAKE YOUR FORD INTO THIS SPORT CAR ONLY \$6.40
(Other types down to \$3.00. Famous sure fit. *Pat.* life-size patterns and picture instructions show how. You can easily convert your Ford into this fast, saucy Sport Car as hundreds have done with a few dollars worth of material from the hardware store. No need to lay up the car. The "P.A.L." with conical disc wheel patterns, Pressed Metal Streamline Rear only \$6.40 delivered. Built low, rides wonderfully easy. Order NOW while we can make good delivery. Send 1c coin for illustrated prospectus of Sport Bodies, "Judy" Tops and "Ganem" Windshields. KUEMPEL CO., 515 Kuempel Bldg., Guttenberg, Iowa

ZIP-ZIP
A great and rapid seller, something every boy wants and never gets tired of; scientifically and practically made. If you like hunting and outdoor sport get a Zip-Zip. Prong made of beautiful metal. Fine Zip-Zip rubbers with plenty of pep and force. Order from us or your dealer. Zip-Zip complete, 35c, or three for \$1.00.
Automatic Rubber Co.
Dept. 22, Columbia, S. C.

CLASS PINS
FREE CATALOG GIVE NAME OF SCHOOL OR CLUB AND NUMBER IN CLASS
Either pin illustrated made with any 3 letters and 2 figures, one or two colors enamel. Silver plate, 20¢ ea., \$2.00 doz. Sterling silver, 40¢ ea., \$4.00 doz. Write for catalog of sterling and solid gold pins and rings.
Bastian Bros. Co. 450 Bastian Bldg., Rochester, N.Y.

AGENTS 500% PROFIT
\$60-\$200 per week. Free samples **GOLD SIGN LETTERS** for store and office windows. Anyone can put them on. Big demand everywhere. Liberal offer to general agents.
METALLIC LETTER CO., 433A N. Clark, Chicago

NO MONEY DOWN
EASY TERMS
Save Big Money
FREE TRIAL
Nearly a Year To Pay
OLIVER Speedster

Here is the newest Oliver—the Speedster Model, handsomest, finest and most perfect standard typewriter we ever built. The triumph of 28 years of typewriter manufacturing. We don't ask you to buy it first. All we ask is that you send for it and try it FREE for five days. Note how easy and quiet is its action. Note the countless improvements and refinements that feature it. It is the fastest typewriter we ever built. No human hand can write fast enough to tax its speed. And we offer you this amazing new typewriter at the lowest price and the lowest terms offered anywhere for a new standard machine.
TEST IT AT OUR RISK
Don't send a penny. We will ship you this wonderful typewriter for you to try out in your own home or office. Then if you are delighted with it you can pay for it on easy terms, a little each month. If not, return it at our expense. We take all the risk. You are under no obligation. Write for our amazing FREE TRIAL OFFER. Dealers and agents wanted everywhere in unassigned territory.

NOW The Oliver Typewriter Company,
1103 Oliver Typewriter Building,
Chicago.
Please send me, without obligation, your catalog, FREE TRIAL OFFER, easy payment terms and cash discount on the new OLIVER Speedster.
Name.....
Address.....
City.....

ACME
for amplification
Radio Apparatus of distinction
ACME APPARATUS CO.
PIONEER TRANSFORMER AND
RADIO ENGINEERS AND MANUFACTURERS
CAMBRIDGE, MASS., U. S. A.


THE HOME WORKSHOP

How to Do Simple Lathe Work without a Lathe

By Howard Greene

MANY a time the amateur mechanic comes to a stopping place in his work for lack of a lathe. Yet in a large number of cases the obstacle can be surmounted satisfactorily.

A 1/2-in. hole in an iron casting, for instance, had to be enlarged, for a depth of an inch, to 5/8 in. This is how it was done: A piece of cold-rolled steel rod was found that was a snug fit in the hole. Through this a 1/8-in. hole was drilled. A cutting tool was made of a scrap of 1/8-in. round tool steel or drill rod, and this was driven into the hole, in which it fitted tightly. With the cutting end projecting about 1/64 in., the "boring bar" was inserted in the hole to be enlarged and the cutter was brought against the casting. The tool was turned by means of a handle clamped to the end. When the desired depth was reached, the cutter was driven out with a punch until it projected 1/64 in. more, and the process was repeated. Once the tool had been made, the actual

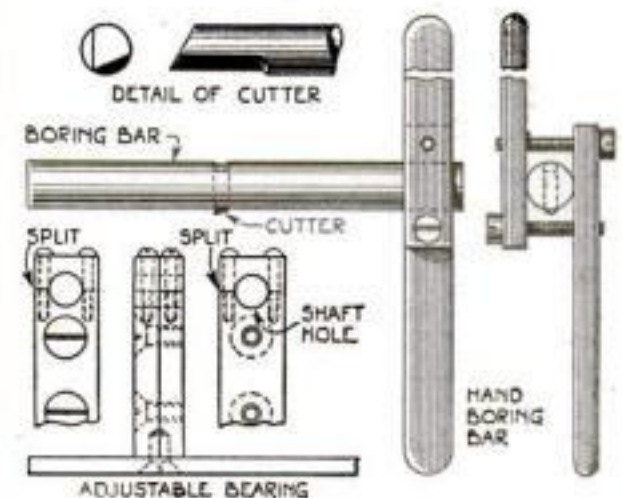

A simple hand boring bar and an ingenious homemade adjustable bearing

work required only half an hour. For bigger jobs of the same sort the tool could be turned with a brace; but for small work, turning by hand is much better, as very little "power" is required. It does not do to try to take too heavy a cut; quicker work can be done with a number of light cuts.

When disks of wood, fiber, and sheet metal are wanted, it is really easier to cut them with a common gasket cutter than to make them in a lathe. The important thing is to have the right kind of a cutting tool. No difficulty has been experienced in cutting fiber disks 6 in. in diameter up to 3/8 in. thick and brass disks 4 in. in diameter and 1/8 in. thick. It simply calls for a little elbow grease and a properly made cutter which has plenty of clearance, so that once the cutting edge has begun to work down, the tool will not rub and bind and make the edge of the disk ragged. A gasket cutter can be bought in any hardware store for less than a dollar, but the cutters will be found of little or no use except for very thin stuff. A new one will have to be made or, what is about as good, a new cutting edge can be ground on the butt end. Hardening and tempering will soften the original cutting end, but this will not matter much.

A grooved pulley to take a 3/16-in. round belt, which is the size of the ordinary sewing-machine belt, can be made from three disks of 1/8-in. fiber screwed together with machine screws, the fiber being


(Continued on page 123)

THE HOME WORKSHOP

drilled and tapped as if it were metal. A rattail file $\frac{1}{4}$ in. in diameter at its thickest part will round out the groove. The center disk should be cut so that when the three are put together, there will be a groove $\frac{1}{8}$ in. deep.

To fasten such a pulley permanently to the shaft, drill a small hole through the shaft to take a bit of steel wire—a wire nail is excellent—long enough to project about half the diameter of the shaft on each side. Cut a groove in the middle disk so that when the disk is slipped on the shaft, the wire pin will fit snugly in it. Then the outside disk is put on the shaft and the whole pulley screwed together, locking the pin and pulley solidly. This is a most satisfactory arrangement. Pulleys made in this way should be solidly screwed together, especially if they

are more than, say, 3 in. in diameter. A 4-in. pulley should have about six equally spaced screws, all as close as possible to the edge. Glue may be used, but it is not reliable by itself,



The completed countershaft

as it does not stick well to the belt fiber.

The writer has a small countershaft carrying a 4-in. pulley and a three-step cone, $1\frac{1}{2}$, 2 and $2\frac{1}{2}$ in., on a shaft of $\frac{5}{16}$ -in. steel drill rod. This is used to drive a small lathe and transmits the power of a $\frac{1}{20}$ -hp. induction motor, $\frac{3}{16}$ -in. round belting being used. The pulleys were made before the lathe was obtained and there is no lathe work on them, but they have been fully equal to the requirements, and the only result of six months' hard labor has been in smoothing them and making the belts grip better. Incidentally, the belts are laced with the gut of old violin E strings.

How Bearings Were Made

The bearings for this shaft were made in a rather unusual way and one that has worked out extremely well. Each bearing was made of two pieces of ordinary brass bar stock, $\frac{1}{4}$ by $\frac{3}{4}$ in. For each bearing, two pieces of the brass were cut long enough to give the bearing the proper height and they were joined with two $\frac{1}{4}$ -in. machine screws, making one piece $\frac{1}{2}$ by $\frac{3}{4}$ in.

The hole for the shaft was drilled through the $\frac{1}{2}$ -in. way. Then the two pieces were taken apart and split at the sides with a hacksaw and drilled and tapped for $\frac{1}{8}$ -in. machine screws for closing up the hole to take up wear. The peculiarity of the arrangement is in the fact that one of the halves of the bearing is split on the right and the other on the left. This makes possible a very fine adjustment.

As it is almost impossible to drill the bearing holes quite true with a hand drill, they were drilled $\frac{1}{64}$ in. under size and reamed in position with a round file, finally being ground true with fine emery and a piece of the same drill rod used for the shaft. The "reaming" with a file is a mechanical crime, but it worked well.

The bearings are mounted in a $\frac{3}{16}$ -in. brass plate by means of two $\frac{1}{4}$ -in. machine screws running up through the bottom of the plate and countersunk. After six months, there is so little shake that it is very difficult to detect it.

PATENTS

Seventy-six Years of Practice

THE firm of Munn & Company filed its first application for a patent in 1846, and for seventy-six years has endeavored to keep pace with the inventive genius of the United States. An experience of many years is at your disposal. If you have an invention which you wish to patent, send your sketches or model together with a description of your device, explaining its operation, and you will receive prompt, courteous attention.

Write for our Handbook on PATENTS

A full and complete booklet on Patents, Designs, Trade-Marks, Foreign Patents, Copyrights, Labels and Patent Office Practice with an explanation about our methods, terms, etc.

All communications strictly confidential

Keep in touch with the inventions of the world by reading
SCIENTIFIC AMERICAN

The MONTHLY MAGAZINE with a special appeal to every man of inventive genius. Recent rulings of the Patent Office, descriptions of the latest patented inventions, legislation and court decisions affecting patents, are noted in this authoritative publication.

MUNN & COMPANY

Patent Attorneys

683 Woolworth Building, New York City

Scientific American Bldg., Room 3, 625 F Street, Washington, D.C.

801-D, Tower Building, Chicago, Ill.

611-A, Hanna Building, Cleveland, O.

602 Hobart Bldg., San Francisco, Cal.

TYPEWRITER Prices Smashed!

ONLY **2.00** DOWN
and it's yours!

Your choice of the World's best typewriters—Underwood, Remington, Oliver—full size, late model, completely rebuilt and refinished brand new. Prices smashed to almost half. Just send your name and address and we will mail you our complete FREE CATALOG prepared, fully describing and showing actual photographs of each machine in full colors. We also send every detail of our direct-to-you small-payments plan. Write NOW to save at least one-half. No obligation on your part whatever. ACT QUICK. INTERNATIONAL TYPEWRITER EXCHANGE. 177 N. State Street Dept. 2-49 Chicago, Illinois



10
DAYS
FREE
TRIAL

Agents Splendid Profits



introducing the New Sun Automatic Regulator and Timer, gives proper spark automatically for every speed of motor. Does away with Spark Lever. Back-Kick Impossible—Insures instant start in all weather. Prevents fouling of spark plugs and forming of carbon. Engine remains clean giving more power on hills, more speed on level roads at less cost. Grease, dirt and waterproof—Fully guaranteed. Sold on 30 days trial. Retail price \$3.50. Large income for active workers. Tremendous sales opportunities.

AUTO SUN PRODUCTS COMPANY.
Dept. 32 Cincinnati, Ohio

The
Prophy-lactic

Tooth Brush

Most of your friends use it
and profit by it

Invention Now Taught

Great Inventors Now Show You How to Make Your Ideas Pay

Thousands of inventions are needed today. Just one little idea can bring you fortune and fame. The world is waiting for new inventions in engineering, chemistry, household articles, radio, and other fields—and will pay big money for even the simplest idea.



RAYMOND FRANCIS YATES

Little things like the tin bottle cap, the crimped hair-pin, the rubber on the end of a pencil brought their inventors hundreds of thousands of dollars. Couldn't you make some equally simple invention? Haven't you ideas that could be turned into money? Inventing isn't a matter of blind luck—it isn't a question of guesswork. Invention is based on certain principles, just as any other profession. It follows a definite course of procedure step by step from the origination of the first idea to its final development on a commercial scale.

Learn at Home in Spare Time

Hitherto, every inventor had to work out these principles of invention for himself. For every successful inventor knows and uses these principles. He knows WHAT TO INVENT, HOW TO INVENT, HOW TO PROTECT HIS RIGHTS and HOW TO MARKET HIS PATENT OR INVENTION. But now you can learn in a few months what it took great inventors years of discouragement and terrific struggle to acquire. Fifteen famous inventors have now revealed, for the first time, the secrets of invention. They explain how to originate ideas, how to develop and perfect your ideas, how to patent your inventions, and how to sell them to your best advantage. In short, they make it amazingly easy for you to become an inventor, simply by learning the whole wonderful science of invention, step by step, from beginning to end. It requires just fascinating moments of your spare time at home.

First Course of Its Kind

This is the first course in practical invention that has ever been devised. Now you can take Edison's advice and actually learn HOW TO INVENT—how to make invention a profession! In simple, easy-to-understand language, you are told how successful inventors work; you learn how to use the secrets of invention that convert a simple little idea into money.

FREE New Book on Inventive Science

A wonderful new book has just come from the press that tells all about the Science of Invention; that shows how great inventors work, how little ideas have made fortunes; how you, too, can easily learn the secrets of successful invention. This fascinating Book will be sent free to all those who are genuinely interested. Send for this Book today, as only a limited number are available for free distribution. Write your name and address on the coupon below, or send a post card NOW! There is no cost or obligation. This bureau is not connected in any way with patent attorneys or manufacturers. We do nothing but teach the science of invention.

BUREAU OF INVENTIVE SCIENCE
Dept. 23, Wisner Building, Rochester, N. Y.

Bureau of Inventive Science, Dept. 23
Wisner Building, Rochester, N. Y.

Please send me your free book, "The Science of Invention."

Name.....

Address.....

City.....

State.....


THE HOME WORKSHOP

Small Motor-Driven Fretsaw Is Simple in Form

By Ernest Bade

A SIMPLE fretsaw for light work such as toymaking and cutting out panels with pierced designs and puzzle pictures, can be constructed quickly and easily along the lines shown in the accompanying illustration. The framework of this saw is made from metal strips taken from a toy construction set, but other material will serve as well.

The first step is to make a table and its support. This must be as rigid as possible and so made that it can be securely fastened to the worktable or bench. The whole support can consist merely of a box placed upside down on the table, the far side being removed. The saw holder or

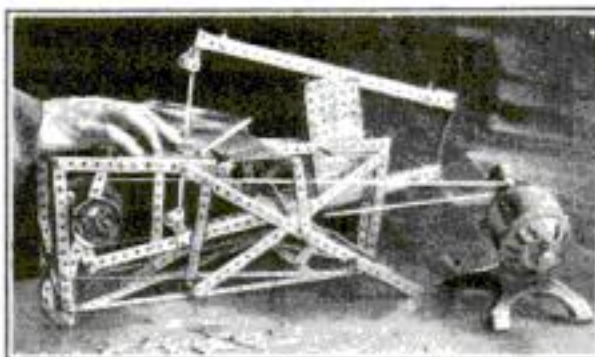

Although made of toy parts, this fretsaw serves well for light work

frame consists of two strips, a block and a spring. The long strips can be made of wood or simply be hollow tubes or fairly thick metal strips. A few inches from one end, one of the strips is fastened securely to the block; the other strip is pivoted to the block by means of a bolt, so that this arm is movable. The spring connects the shorter ends of the two arms.

This rocking beam is then loosely fastened with a bolt to two arms projecting from the back of the table. The whole beam should rock up and down freely.

A grooved wheel is fastened to the lower part of the table and connected with the front end of the lower rocking arm by means of a lever or connecting rod attached near the rim of the wheel. In this way the circular motion of the wheel is translated into an up-and-down movement. The saw blade is clamped to the upper and lower beams at the front. This is accomplished by cutting slots where the saw is to go and arranging bolts with wingnuts so that the sides of the slots can be pressed against the blade. A small electric motor belted to the grooved wheel provides the power.

An Easy Way to Tip Your Favorite Cigarettes

SOME smokers prefer tipped cigarettes, but cannot obtain their favorite brand with ends of cork or straw. To tip plain cigarettes at home involves nothing more than dipping the ends for about half an inch in collodion dissolved in ether. When the collodion is hard, punch two or three holes through the film at the end of the "butt" so that the smoke will draw through easily. Paraffin can also be used, but the collodion is better because it does not crack as readily.

Cigarettes treated in this manner can literally be chewed without the smallest particle of tobacco reaching the mouth. The tip is practically tasteless and does not interfere with the full enjoyment of the smoke.—G. W. GREENE, Madison, Wis.

Build a business Saving Coal

It's easy to sell the public coal-economy—and it's profitable. Become distributor for the much-demanded CROWN Fuel Saver. Thousands in use. Saves at least 1/3 the fuel. Many users get saving up to 50%—smoke reduction 25% to 75%.



Build a permanent business with sure and steady profits. Every distributor aided by strong advertising, helpful sales literature, and free training. We show you how to sell the CROWN and help you do it.

If you want a business that requires little investment but that offers splendid profit-making opportunities—write or wire for our exclusive distributor proposition.

C. F. S. CO., 12 N. 10th St., Richmond, Ind.

"Lighting Fixtures"



Ready to hang. Direct from manufacturers.

Completely wired including glass-ware.

Send for Catalogue No. 24 and Dealers' proposition

ERIE FIXTURE SUPPLY CO.
Desk A, Erie, Pa.

LEARN RADIO

Here's your opportunity. Radio needs you. Win success in this fascinating field. Trained men in demand at highest salaries. Learn at home, in your spare time.

Be a Radio Expert

I will train you, quickly and easily, to design, construct, install, operate, repair, maintain, and sell all forms of Radio apparatus. My new methods are the most successful in existence. Learn to earn

\$1,800 to \$10,000 a Year

FREE Wonderful, home-construction, tube receiving set, of latest design. Write for "Radio Facts" free. Engineer Mohnaupt.

American Electrical Association
Dept. 43 4513 Ravenswood Ave., Chicago

5 Master Keys

Work like magic in emergencies or prove whether your door or padlocks are burglar-proof. Open and test thousands of different locks. Recommended by users in ten different nations. Most wonderful and only keys of their kind. Send \$1 today. Novel key chain FREE with set.

Master Key Co., 5-0 Manhattan Block, Milwaukee, Wis.

Convert Your Bicycle Into a Motorcycle



by using a Steffey Motor Attachment. Simplest machine on the market. Fits any ordinary bicycle. Easily attached. Practical—Successful. Send stamp for circulars.

STEFFEY MFG. CO.
Dept. S, 5025 Crown St., Phila., Pa.

HIGH GRADE WIRELESS
Head Receivers, Microphones, Keys, Jacks, Etc.
MANUFACTURED BY
American Electric
COMPANY
STATE AND 64TH STS., CHICAGO, U. S. A.

BOYS! Free Catalog on request

MAKE THIS FAST CAT BOAT MODEL

Be the first boy in your neighborhood to make a Boucher Boat. Make this famous cat-boat model "The Snipe."

Watch the other boys flock around you when they see it. This finished model is worth \$15 after it's made.

Here are the specifications: Length over all 20 in., Beam 8 in., Draft 6 1/2 in., Sail Area 200 sq. in., Weight 2 lbs. That is the "Snipe", when completed and ready to sail.


Here are the materials we send you: Bottom block, side planks, deck beams, cork planks, mast, boom, step, tiller, traveler, rudder, keel, stern, stern piece—18 parts in all, with necessary hardware, the only work necessary being to smooth them down, paint them and fit them together according to our blue prints and simple directions.

Send \$5 now, or order set sent to you C. O. D. and pay postman. Address Dept. 401.

BOUCHER INC. SCALE MODELS
415 Madison Ave., New York

Complete Catalog 25c. Containing full descriptions, illustrations and prices for completed models and construction sets of boats, boilers, engines, locomotives etc.

RELIEF FOR YOUR TROUBLE ZONE
—the nose and throat



LUDEN'S
MENTHOL COUGH DROPS
give quick relief

"DON'T SHOUT"

"I hear you. I can hear now as well as anybody. 'How?' With THE MORLEY PHONE. I've a pair in my ears now, but they are invisible. I would not know I had them in, myself, only that I hear all right."

The Morley Phone for the DEAF

is to the ears what glasses are to the eyes. Invisible, comfortable, weightless and harmless.

Anyone can adjust it. Over one hundred thousand sold. Write for booklet and testimonials.

THE MORLEY CO., Dept. 797, 26 South 14th Street, Philadelphia

You Can Save \$35.00

By recovering your old auto top frame yourself. Our recovery is custom tailor made in our own factory to fit all makes and models of cars. Any person that can drive a car can put it on. We furnish instructions. Roof and quarters are sewed together, with rear curtains, fasteners, welts and tacks complete. Give us the name, year and model number of your car and we will send you catalog with samples.

\$4.45 and up
Parcels Post Paid

LIBERTY TOP & TIRE CO., Dept. E-3, Cincinnati, O.

A Wonderful Opportunity

The Eastern Division of the Radio Corporation of America accepts no inexperienced applicants in their services as Wireless Operators other than our graduates. Investigate the advantages offered through taking either our Home Study or Residence course in Radio.

RADIO INSTITUTE OF AMERICA, (Formerly Marconi Institute) 328 Broadway, New York City

TYPEWRITERS
We Save You 50 %

FREE TRIAL—EASY TERMS

Your choice of all STANDARD MAKES: UNDERWOOD, ROYAL, SILENT L. C. SMITH, Self-starting, REMINGTON, etc. Rebuilt by the Famous "Young Process". Guaranteed good as new. Lowest cash prices. Time payments or rentals with special purchase privilege. Largest stock in U. S. Write for special prices and terms.

YOUNG TYPEWRITER CO., Dept. 537, CHICAGO


THE HOME WORKSHOP

Folding Table Is Useful for Cards or Luncheon

By A. L. Morgan

MORE substantial than an ordinary folding card-table and practically as convenient to store away, the table illustrated will be found a useful article for many purposes. In winter it can be used as a card-table and in summer on the veranda or lawn for luncheon. The top can be taken off merely by giving the wooden clamp underneath about one eighth of a turn; the legs then fold together and the whole can be stored in a corner of a closet.

Figure 1 shows the complete table and Fig. 2 is a section through the top, which is made of 1/2 by 6 in. pieces of soft wood glued together and reinforced by two 1/2 by 3 in. cleats. The top is screwed to the 5/8 by 3 in. oak strips that form the skirt. The latter are neatly mitered together at the corners.

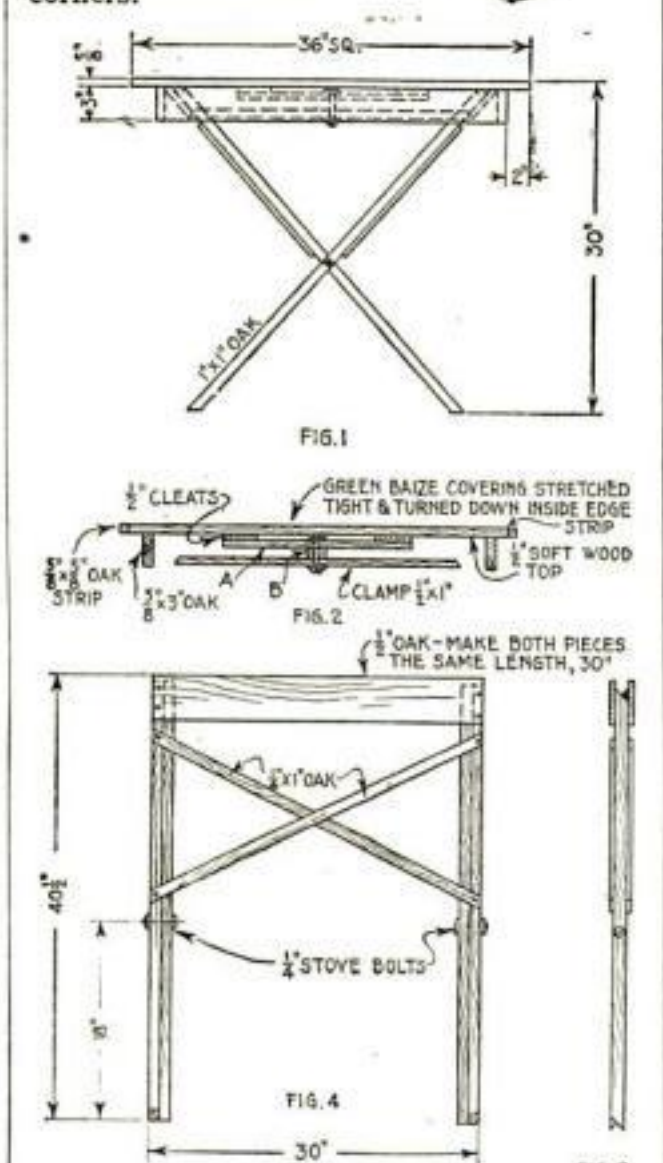

The table open and closed, with the dimensions of the various parts

The clamp, Fig. 2, is of hard wood, beveled at the ends and long enough to engage the bottoms of the upper cross pieces of the legs. A 1/4-in. stove bolt passes through its center, through a spacer B, and through a 1/2 by 3 in. piece, A, which is the last to be secured in place. The bolt should have a washer under its head and be riveted slightly at the threaded end after the nut is adjusted. To get the proper adjustment of the nut, turn the table upside down with the legs in place and lay the clamping unit in position. It will then be easy to get the proper thickness for the

(Continued on page 126)

NAME	POSITION	SALARY
John	AUTOMOBILE ENGINEER	\$125 WEEK
	REPAIR MAN	\$50 WEEK
	CHAUFFEUR	\$40 WEEK

Put Your Name ON THIS Pay-Roll

Men like you are wanted for big-pay positions in the fascinating field of automobile engineering. We have made it easy for you to fit yourself for one of these positions. You don't have to go to school. You don't have to serve an apprenticeship. Fifteen automobile engineers and specialists have compiled a spare time reading course that will equip you to be an automobile expert without taking any time from your present work.

AUTO BOOKS
6 Volumes Shipped Free

Now ready for you — an up-to-the-minute six-volume library on Automobile Engineering, covering the construction, care and repair of pleasure cars, motor trucks and motorcycles. Brimming over with advanced information on Lighting Systems, Garage Design and Equipment, Welding and other repair methods. Contains everything that a mechanic or an engineer or motorcyclist or the owner or prospective owner of a motor car ought to know. Written in simple language that anybody can understand. Tastefully bound in American Morocco, flexible covers, gold stamped, 2,650 pages and 2,100 illustrations, tables and explanatory diagrams. A library that cost thousands of dollars to compile but that comes to you free for 7 days' examination.

Price Reduced

Down goes the price on these famous Auto Books. We have induced our printers and binders to cut the price they charge us. We pass this saving on to our customers.

Mail Coupon Now For FREE Trial

- Partial List of Contents**
- More than 190 Blueprints of Wiring Diagrams
 - Explosion Motors
 - Welding
 - Motor Construction and Repair
 - Carburetors and Settings
 - Valves, Cooling
 - Lubrication
 - Fly-Wheels
 - Clutch
 - Transmission
 - Final Drive
 - Steering Frames
 - Tires
 - Vulcanizing
 - Ignition
 - Starting and Lighting Systems
 - Shop Kinks
 - Commercial Garage Design and Equipment
 - Electrics
 - Storage Batteries
 - Cars and Repair
 - Motorcycles
 - Commercial Trucks
 - Glossary

Only 10c a Day

Not a cent to pay in advance. First you see the books in your own home or shop. Just mail coupon and pay express charges when books arrive. You can read them and study them for seven whole days before you decide whether you want to keep them or not. If you like the books send only \$2.80 in seven days and \$3 a month until the special introductory price of \$21.80 has been paid. (Regular price \$45.)

Send No Money Now



Don't take our word for it. See the books without cost. There is so much profit in this offer for you, that we urge you to waste not a moment in sending for the books. Put the coupon in the mails today. Send no money—just the coupon!

American Technical Society, Dept. A-203 Chicago, Ill.


AMERICAN TECHNICAL SOCIETY
Dept. A-203 Chicago, Ill.

Please send me the 6-volume set, Automobile Engineering for 7 days' examination, shipping charges collect. If I decide to buy, I will send \$2.80 within 7 days and the balance at \$3 a month until the \$21.80 has been paid. Then you send me a receipt showing that the \$45.00 set of books are mine and fully paid for. If I think I can get along without the books after the seven days' trial, I will return them at your expense.

Name

Address

Employed by

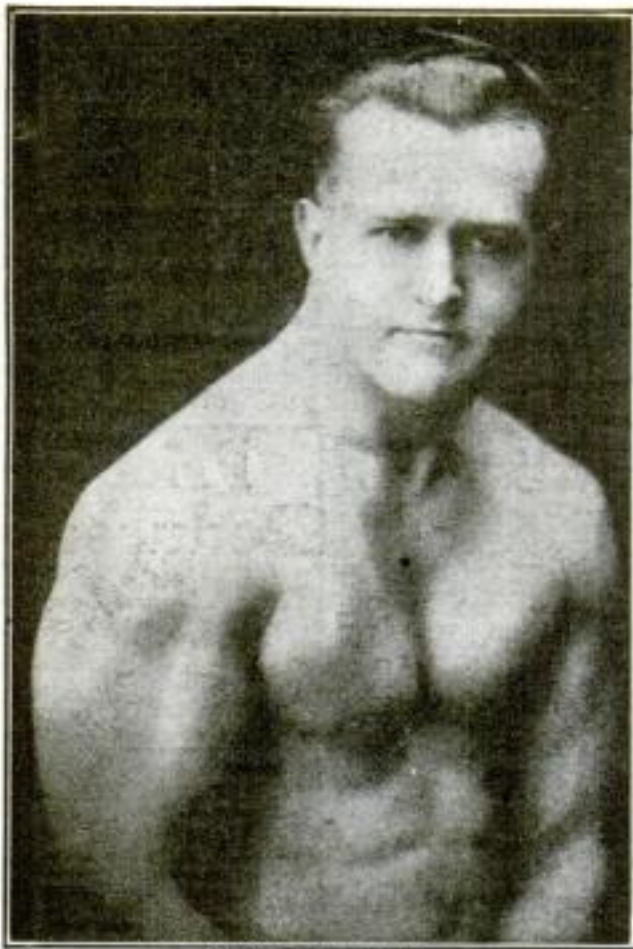

Earle E. Liederman
as he is to-day

If a Snake Had Brains—

He would still be a snake. With his present body he would be forced to continue crawling on his belly. So he would be no better off. Of What Use Is Your Brain?

A snake is the lowest and meanest of animal life, while mankind is the highest. Do you make use of your advantages? Your brain is used to direct your body. If you don't keep the body in fit condition to do its work, you are doomed for failure. How are you using this wonderful structure? Do you neglect it or improve it?

Examine Yourself

A healthy body is a strong, robust one. Do you arise in the morning full of pep and ambition to get started on the day's work? Do you have the deep, full chest, the big, mighty arms and the broad back of a REAL HE MAN? Do you have the spring to your step and the bright flash to your eye that means you are bubbling over with vitality? If not you are slipping backward. You are not a real man and you cannot hope for the admiration or respect of others. *Awake!* Get hold of yourself and make yourself THE MAN YOU WERE MEANT TO BE.

90 Days

Will you turn your body over to me for just 90 days? That's all it takes—and I guarantee to give you a physique to be really proud of. Understand I don't promise this—I guarantee it. In 30 days I will increase your arm one full inch, and your chest two inches in the same length of time. And then, just watch 'em grow. From then on you will feel the pep in your old backbone. You will start doing things that you never thought possible. You will amaze yourself and friends as well. Do you crave this new life—these new joys—this abounding health and strength? If you do

Send for My New 64-page Book "MUSCULAR DEVELOPMENT" It Is FREE

It is chock full of photographs both of myself and my numerous pupils. Also contains a treatise on the human body and what can be done with it. This book is bound to interest you and thrill you. It will be an impetus—an inspiration to every red-blooded man. I could easily collect a big price for a book of this kind just as others are now doing, but I want every man and boy who is interested to just send the attached coupon and the book is his—absolutely free. All I ask is the price of wrapping and postage—10 cents. Remember, this does not obligate you in any way. I want you to have it. So it's yours to keep. Now don't delay one minute. This may be the turning point in your life. Tear off the coupon and mail at once while it is on your mind.

EARLE E. LIEDERMAN

Dept. 1303, 305 BROADWAY, NEW YORK CITY

EARLE E. LIEDERMAN

Dept. 1303, 305 Broadway, New York City

Dear Sir:—I enclose herewith 10 cents for which you are to send me without obligation on my part whatever, a copy of your latest book, "Muscular Development." (Please write or print plainly.)

Name

Address

City..... State.....

THE HOME WORKSHOP

Substantial Folding Table

(Continued from page 125)

spacer to allow the clamp to move freely and yet have a slight spring when it grips the cross pieces on the legs.

The top is covered with green baize, stretched tightly and tacked at the edge sufficiently to hold it until the oak finishing strips have been secured in place. These should be neatly mitered at the corners.

Figure 3 shows the end view of the legs when folded and Fig. 4 the front view. The diagonal braces are not mortised but simply sprung past each other and secured at each end with one screw. One pair of legs is made to fit between the other pair, and the pairs are held together by two bolts, which also should be riveted slightly to keep the nuts from loosening.

The woodwork can be finished with a varnish stain of any desired shade or shellacked.

Reversed Hacksaw Blade Cuts Thin Tubes Cleanly

FOR cutting insulating tubes of fiber or mica and thin brass or other light tubes, try using a reversed hacksaw blade. This can be used in the regular saw frame or provided with a handle shaped from a piece of hardwood and fastened to it with tape or rivets.


Light tubes are apt to be shattered when cut in the regular way, but using the reversed blade and a "pull" stroke lessens the danger. This method is also useful on heavier pipe when the blade tends to buckle and break.—M. F. A.



Mule Racing on Cardboard

THE drawings show how to make a new game in which the players each pretend to ride a mule. The rider who first crosses the line at the top of the hill is the winner.

Only two can play the game. Two pushpins represent the mules, or the heads of clothespins with 1-in. brads driven through their centers will serve. Place the mules on

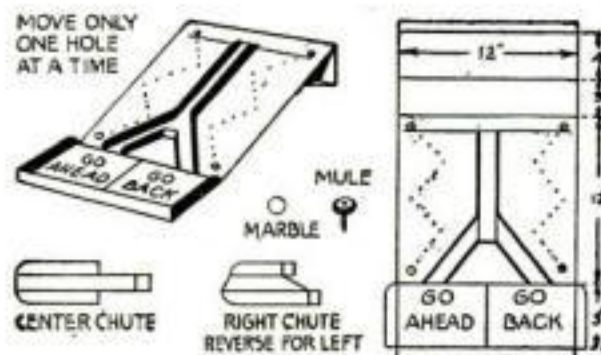

This simply made game gives the children endless amusement

the bottom holes. The first player then lets the marble roll down the chute and moves his mule according to the direction taken by the marble. The second player does likewise, and so on until the hilltop goal is reached.

Make the base of one piece of heavy cardboard 14 in. wide and 26 in. long. Cut out the three chutes from thinner cardboard and glue them in position.—D. W. CLARK.

Santa Fe Special



No Money Down

While other watch dealers are raising their prices, asking you for larger monthly payments, and making payment terms harder for you to meet, we are offering you our new model Santa Fe Special, no advance in price, no money down, easier terms and smaller monthly payments. WE realize the war is over and in order to double our business we MUST give you pre war inducements, better prices, easier terms and smaller payments.

LOOK Adjusted to Positions
Adjusted to Temperature
Adjusted to Isochronism
Adjusted to the Second
Thin Model. All Sizes.

Without one penny of advance payment let us place in your hands to see, to examine, to inspect, to admire, to approve, a real masterpiece in watch creation. A Watch which passes the most rigid inspection and measures up to the exacting requirements of the great Santa Fe Railway System, and other great American trunk lines.

Page 12 of Our Watch Book is of Special Interest to You

Ask for our Watch Book free—then select the Watch you would like to see, either the famous Santa Fe Special or the 6 position Bunn Special, and let us explain our easy payment plan and send the watch express prepaid for you to examine. No Money Down. Remember—No money down—easy payments buys a master timepiece—a 21 Jewel guaranteed for a lifetime at about half the price you pay for a smaller watch of other makes. No money down—a wonder offer.

SANTA FE WATCH COMPANY

380 Thomas Bldg., Topeka, Kansas
(Home of the Great Santa Fe Railway)

A Letter, Post Card or this Coupon Will Bring My Free Watch Book

SANTA FE WATCH CO.,

380 Thomas Bldg., Topeka, Kansas

Please send me your New Watch Book with the understanding that this request does not obligate me in any way.

Name.....

Address.....

State.....

WE TEACH COMMERCIAL ART

Meyer Both Company, the largest Commercial Art Organization in the World, offers you an unusual opportunity for practical training. If you like to draw develop your talent. Study this practical course—taught by the nationally known Meyer Both Company, with twenty-two years success—who each year produces and sells to advertisers over 15,000 commercial drawings. Our teachers give you the double advantage of being instructors of proven ability, as well as artists in this widely known organization. Meyer Both instruction is the difference between successful fact and experimental theory. Commercial Art is a highly paid, intensely interesting profession, equally open to men and women. Home study instruction.

Get Facts Before You Enroll in any School.

Ask the Advertising Manager of the leading newspapers in your city, anywhere in the United States, Canada, England or Australia about the Meyer Both Company—let them tell you about us. Write for our illustrated book "YOUR OPPORTUNITY"—for one-half the cost of mailing—four cents in stamps.

MEYER BOTH COMPANY

Department of Art Instruction

Michigan Ave. at 20th St., Dept. 35 CHICAGO, ILL.

NOTE—To Art and Engraving Firms: Secure practical artists among our graduates. Write us.

Factory Executives Needed At Big Salaries




Employers are having a hard job finding enough of the right kind of men to fill RESPONSIBLE POSITIONS in their production departments. THE DEMAND FAR EXCEEDS THE SUPPLY! These positions pay BIG SALARIES and offer unlimited opportunities for ADVANCEMENT to those who are SPECIALLY TRAINED. Through our complete course in "Modern Factory Management" YOU can receive the SPECIAL TRAINING required—by studying right in your own home—during spare hours at a very low cost. Training is under supervision of leading practical factory experts—and you are most sure to enjoy the entire course. You receive the principles you are after in a way they will stick.

If you want to become a bigger FACTORY PRODUCTION MAN—if you want more CONGENIAL WORK—if you want a SALARY that will put you in the class where YOU belong—THIS IS YOUR BIG OPPORTUNITY.

Write today for a copy of our FREE BOOK—"Forging To The Front." It outlines a definite method for helping you to a BETTER POSITION and a BIGGER SALARY. Send today! Don't wait!

LINCOLN EXTENSION UNIVERSITY, Inc.
574 Kirby Building, - - Cleveland, Ohio



World Radio and Auto Batteries
SAVE YOU 50%
WRITTEN 2 YR. GUARANTEE

We defy price competition; a glance at the prices below will convince you that the World Battery is the best buy on the market. Batteries shipped immediately. Express C. O. D. Begin now to get 100% battery service at half cost. Mail order today.

Automobile Prices

6 Volt, 11 Plate - \$12.50
Ford, Chev., Mitchell, Hup.,
Grant, Elgin, Velle, Baxen.
6 Volt, 13 Plate - \$14.50
Overland, Buick, Reo, Paige,
Hudson, Nash, Stude., Dort.
12 Volt, 7 Plate - \$18.00
Maxwell, Dodge, Regal, Frank,
Briscoe and Crow-Ellhart.
Give year and model of car.

RADIO PRICES

6 Volt, 40 Amps. \$ 8.50
6 Volt, 60 Amps. 10.00
6 Volt, 80 Amps. 12.50
6 Volt, 100 Amps. 14.50

World Battery Co., 1219 S. Wabash Ave., Dept. 7, Chicago

AGENTS: \$6 PER DAY AND UP

Selling concentrated, non-alcoholic food flavors. Always fresh. Put up in collapsible tubes. Ten times the strength of bottled flavors. Guaranteed under U. S. pure food laws. All flavors. Sells in every home. Used every day. Not sold in stores. Big demand. Big repeat-er. 100% profit.

Men or Women

can make big money. Hunt sold over \$300 in one month. You will find this a big, easy seller and a sure repeater. Must satisfy customers or money back. Write for territory and sample outfit. Get a big line of customers. Get repeat orders every month and have a steady income. Write quick.

American Products Co.
7595 American Bldg., Cincinnati, O.



ACT
QUICK
WRITE
TO-DAY

NEW SINGLE PHASE A. C. MOTORS

1/4 H. P.—110
volt, 60 cycle,
1725 speed,
complete with
cord, plug and
grooved pul-
ley - - \$13.00

General Electric
1/2 H. P. \$39.00
Complete with
pulley



ONE YEAR
GUARANTEE

Satisfaction guaranteed or money refunded

Illustrated Catalog of Motors and Supplies FREE
HYRE ELECTRIC CO., 625F So. Dearborn St., CHICAGO

EMERSON

1/4 H. P. \$61.00
1 H. P. \$7.50
1 1/2 H. P. \$5.00
2 H. P. \$7.00

Include Pulley and
Base. All Motors.
1/2 H. P. or larger,
110-220 Volt Rep.
Ind. Type.

MOTORCYCLE BARGAINS

SAVE 25% to 65%

on Slightly used and Rebuilt Motorcycles, Side Cars, Johnson Motor Wheels, Evans Power Cycles, Bicycles. Send for Free Bargain Bulletin and Money Saving Message, listing hundreds of Bargains in used, rebuilt and new machines, supplies, accessories, etc.



AMERICAN MOTOR CYCLE CO.
Dept. 315, 2047 W. Chicago Ave., CHICAGO



Print Your Own

cards, circulars, labels, tags, menus, book, paper. Press \$12. Larger \$25. Job Press \$50 up. CUTS EXPENSE IN HALF. SMALL OUTLAY. Pays for itself in short time. Will last for years. Easy to use, printed rules sent. Print for others, BIG PROFIT. Write factory TODAY for press catalog, TYPE, cards, paper, envelopes. THE PRESS CO., D-33, Meriden, Conn.

\$25.00 in Prizes


See page 6 in front of book for full details

THE HOME WORKSHOP

Old Bicycle Pump Forms Pneumatic Door Closer

WHY pay a lot of money for a pneumatic door closer when you can make one yourself? The main part of this homemade door check is an old bicycle pump.

The cylinder is cut off at the lower end and plugged up with a round piece of brass, which has a projection through which a hole is drilled to take a bolt. This projection is held between two angles bent up from flat iron and screwed to the frame above the door about 1 ft. from the hinged side. A loosely wound spring is inserted around the plunger in the cylinder, and the cap is screwed on. The protruding rod is bent into a loop to accommodate a round piece of iron. This rod is bent in such a

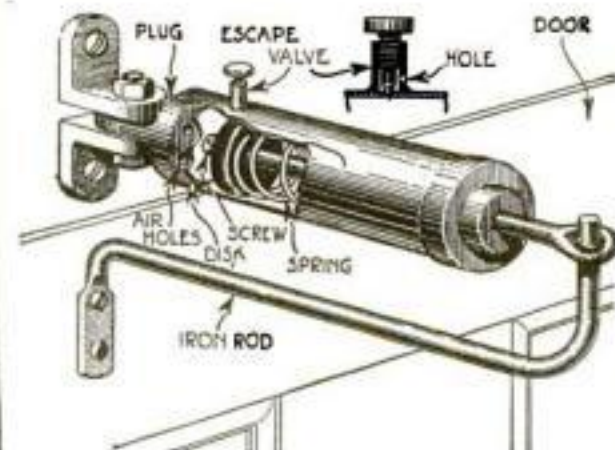

The door closer in place, and detail of the adjustable escape valve

way as to engage the loop at one end and fasten to the door at the other end, which is flattened and drilled for screw holes.


The piece of brass in the end of the cylinder has a series of holes drilled through it near the edge to admit air. Covering these holes on the inside is a steel disk fitted loosely on a machine screw. At the top of the cylinder is soldered a piece of tubing, threaded on the inside to hold a setscrew. The setscrew is ground as shown in the detail drawing. A small hole is drilled in the cylinder as a seat for the conical point, and another in the tubing near the lower end.

When the door is opened, the steel disk is pulled away from the inlet holes by the air that is sucked into the cylinder. As the plunger travels along the cylinder, it compresses the spring. When the door is left open, the spring pushes the plunger back and the air forces the steel disk against the inlets. The air then is expelled only through the escape valve. By adjusting this valve, the door can be made to close quickly or slowly, as may be desired.

If the plunger is well lubricated with heavy oil, the door closer will be found to give very satisfactory service.—EDWIN G. GETTINS, Los Angeles, Calif.

Links from Sash Chain Make Neat Terminal Connectors

NEAT terminal connectors can be made from an old sash chain. Cut off a link, open it, and flatten it out. Then cut one end of the link as shown and bend the other end around the bared terminal of the wire, soldering the connection thoroughly.—FRANK HARAZIM.



FREE

An up-to-the minute **Radio Course**. Wire-less Telephony in its latest development. Write and ask how you can get this \$45.00 course **free**.



This is W. E. Pence in his working togs. I have letters from Mr. Pence and hundreds of other men telling of their wonderful success through my training. Copies of these letters will be sent anyone with my free book.

Electricity Got Pence a \$7000 Raise

W. E. Pence of Chehalis, Washington, one of my students jumped from \$30 a week to \$750 a month in one year's time, through my home-study course in Practical Electricity. One year ago he was an ordinary mechanic. Now he runs his own business. He gives my course all the credit for his success.

What's Your Future?

Today you are earning \$3 to \$6 a day—\$18 to \$35 a week. In the same six days as an Electrical Expert you can make \$70 to \$200 and make it easier—not work half so hard. Why stick to a low-pay, no future job when you can get three to ten times as much in the most fascinating work in the world?

Electrical Experts Earn \$10 to \$30 a Day

Right now, trained electrical men; Electrical Experts—are in big demand at the highest salaries. More big jobs are open than there are men to fill them. Even the ordinary electrician gets big money but the Electrical Expert—the kind of men I turn out tops them all. Get ready for one of these big jobs now—or go into business for yourself. I will show you the way.

Let Me Help YOU to a BIG PAY Job

No matter what kind of work you do now I can fit you for a big pay job in a few short months. Age or education make no difference. My spare time home study course in Practical Electricity will fit you to earn \$12 to \$30 a day.

Money Back Guarantee

Your success is assured—under bond I guarantee to return every penny you pay to me if you are not entirely satisfied with my instruction. A million dollar institution backs up this guarantee.

Send Coupon NOW for "Vital Facts"

Let me send you my book of "Vital Facts." Let me tell you—prove to you—by their own letters—how Pence and hundreds of other men broke into the big pay class. SEND THE COUPON NOW.

L. L. COOKE, Chief Engineer

Chicago Engineering Works

Dept. 533, 2150 Lawrence Avenue, Chicago, Ill.

L. L. COOKE, Chief Engineer
CHICAGO ENGINEERING WORKS
Dept. 533, 2150 Lawrence Ave., Chicago, Ill.

Without obligation on my part, please send me your Big Electrical Book, description of your free outfit and laboratory privileges, free employment service and letters from successful men.

Name


Address

The "Cooke Trained Man is the 'Big Pay' Man"

THE HOME WORKSHOP


Miniature Tool Holder Increases Scope of Small Lathe

THE usefulness of a small lathe used by the writer for model work was limited by the fact that the tool holder of the slide rest provides for only two tool positions—one at right angles to the bed and the other parallel with it, and there was no provision for altering the height of the tool. Most of the inconvenience resulting from this arrangement was overcome by making a small tool holder, as illustrated.



The tool holder in use on bench lathe

A piece of $\frac{3}{8}$ -in. square cold rolled steel was put in the lathe and 2 in. of its length turned down to $\frac{1}{4}$ in., this being the size of the regular tools. Half an inch from the shoulder the bar was cut off, leaving a piece $2\frac{1}{2}$ in. long, with $\frac{1}{2}$ in. square and the rest round. Through the square part a $\frac{1}{8}$ -in. hole was drilled at an angle for the cutters, and a hacksaw cut was run



The tools are made of $\frac{1}{8}$ -in. drill rod

from the end of the square part to meet the hole. Lastly, a hole for a pinching screw was drilled beyond the tool hole, enlarged to clear the screw above the split and tapped below the cut.

Tools were made of $\frac{1}{8}$ -in. drill rod, filed to shape, hardened and tempered to a light straw color and finished on an oilstone. In spite of their smallness, the cutters have stood up well and given no trouble whatever. This little device has very greatly increased the usefulness of the lathe and has proved excellent for inside work, such as boring.—H. G.

Flame Removes Broken Handle from Eye of Ax

WHEN the handle of an ax, hatchet or hammer breaks short, so that a tightly wedged piece of wood is left within the tool, the eye can be cleared by using an alcohol lamp or bunsen burner as shown.

A gentle but continuous blast is blown through a blowpipe so that the intense heat



Blast from blowpipe burns hole through tightly wedged wood

concentrated at a point will soon burn a hole through the wedged fragment of the handle. With this hole as a starting point, it is the work of but a few minutes to remove the charred pieces remaining in the eye. The most stubborn and firmly fixed handle can be taken out in this way.—E. B.

The Fascination of the Stars



SATURN with its rings, Mars with its canals, the craters of the moon, the much-talked of sun spots—you can actually see and study all these wonders with Bausch & Lomb Telescopes

Bausch & Lomb Telescopes, made by America's leading lens-makers, are scientifically accurate, well built and beautifully finished. They are made in ranges of power from 24x to 120x, and equipped for both terrestrial and astronomical observation. Country clubs, yacht clubs, schools and homes become observatories when equipped with one of these beautiful instruments.

Write for literature on these new telescopes—
See them at your dealer's.

BAUSCH & LOMB OPTICAL CO.

600 St. Paul St., Rochester, N. Y.

New York Washington Chicago San Francisco London

MAKE \$100⁰⁰ per WEEK

1,000 good positions open in splendid territory. Our salesmen make big money selling Fyr-Fyter to homes, auto owners, garages, factories, hotels and schools. Cash or easy payment. We want only fast, hard workers. We train you Free! If you have no experience. Easy to learn, easy to sell and make \$200 to \$10,000 yearly. No capital required. You get cash every day. Blaik made \$38 first week with no previous selling experience. Others made from \$35 per week to \$10,000 per year or better. Write today giving experience, if any, and references, and if you are willing to work we will put you in the way of making more money than you ever dreamed of.

The Fyr-Fyter Co., 3114 Fyr-Fyter Bldg., Dayton, O.

TAP DRILL SIZES



This New Handy Time Saver Disc of screw threads and tap drill sizes will automatically give the correct size of any drill to be used when using any kind of a tap. The disc gives for U.S. Standard screws: S.A.E. Standard; tap drill sizes for all pipe taps; tap drill and body drill sizes for machine screws; used on radio work together with a complete table of decimal equivalents for sixty-fourths of an inch. Printed on the very best pressed fibre size 3 1/2 inches with printed instructions. Two for 25c. Agents wanted.

ROGERS CO., 3101 Lyndale S.,

Minneapolis, Minn.

Law Course in Book Form

13 Vols. Bound in Law Buckram. Compiled by 56 of America's Most Eminent Legal Authorities

Here is a complete home-study law course in book form that you can master in your spare time. Thirteen volumes, nearly 6,000 pages (7 x 10 inches), bound in law buckram, red and black labels with titles in gold. This wonderful law course is the combined work of professors of Harvard, Yale, Pennsylvania, Michigan and Wisconsin law schools.

Study at Home, Aided by Free Reading Course

Every principle of law is made clear. Fascinating reading course of 25 Texts (free with the books) is a teacher, right at your elbow! A set of review question covers the text matter fully.

75c a Week You get the entire 13-volume law library and Complete Reading Course of 25 pamphlets for only 75 cents a week. See offer in coupon.



MAIL THE COUPON

American Technical Society, Dept. E-203, Chicago, U.S.A.

Please send "Library of American Law and Practice" and Reading Course for seven days' examination, shipping charges collect. I will send \$2.00 within seven days and \$3.00 a month thereafter until I have paid \$49.00 or return the books at your expense.

Name

Address

Employed by

\$25.00 in Prizes

See page 6 in front of book for full details



\$3 brings genuine UNDERWOOD

Yes, only \$3 down puts this genuine standard Shipman-Ward Rebuilt Underwood in your home. Then—small monthly payments, or if convenient, pay cash. Either way you get the world's standard typewriter at a big cash saving.

WHY PAY RENTAL?

Think of it! You pay little more than rental, and the machine is yours! We offer the same three models of the Underwood Typewriter which are being made and sold by the Underwood Company today. The only difference is that Shipman-Ward machines are priced lower and are rebuilt like new by experts. You can't tell them from brand new machines. Visible writing—the FULL LINE of typewriting is visible at all times. STANDARD 4-RW SINGLE SHIFT KEYBOARD. Two color ribbon, back spacer, stencil device, automatic ribbon reverse, tabulator, etc.

TEN DAYS' FREE TRIAL

See for yourself! Try the typewriter ten days. You must be satisfied or the entire transaction won't cost you a penny. Act today. Get our big illustrated catalog and full particulars. Write NOW.

FREE TRIAL COUPON

Typewriter Emporium
SHIPMAN-WARD MFG. CO.

2143 Shipman Bldg., CHICAGO

Send by return mail Bargain Offer No. 2143 of a Standard Visible Writing Underwood. This is not an order and does not obligate me to buy

Name

Street or R. F. D. No.

Postoffice

State

THE HOME WORKSHOP

Simply Made Weather Telltale
Gives Warning of Storms

By E. A. McCann

ALTHOUGH this apparatus must not be considered as a really scientific instrument, it is easily made and as a rule will give warning of fine or wet weather, storm or calm.

First, get a glass jar, *C* (a milk bottle will do), and a flask, *B*, from the drugstore; then, to fit them, build a framework, *A*, which is just an incomplete box, with back, top, bottom, sides, and a partial front. The instrument may be entirely inclosed if sufficient openings are left for the air to get in and out freely.

A piece of brass tubing, *F*, about $3\frac{1}{2}$ in. long, fits a socket in the back and goes through the front. Plug the front end with a piece of wood and into the plug screw a light pointer, *I*. To the back of the plug fasten a piece of catgut, which runs right through the tube and out at the back, as at *G*. Thread the tube through the front and fasten the pulley, *E*, tightly to the tube so that it is over the center of the jar. Leave the gut hanging loose for the present.


Now, hang the flask *B* in a wire sling and fasten a silk thread to the wire. Run the thread over the pulley, hanging a weight, *D*, on the other end, a little less than heavy enough to balance the flask when partly full of water. You can adjust this later on when the flask is inverted. Make a dial with "Fair" on one side and "Wet" on the other, and fasten it to the front of the box.

Fill the jar or bottle about a third full of water and fill the flask and turn it over in the jar. Most of the water will run into the jar. Until you have a balance, twist the catgut toward the side on which the weight hangs, and fasten it off behind. Pour a little oil on the surface of the water to prevent its evaporating. You can color the water if you like. Do not put the instrument in the sun.

When the weather gets warm, the air in the flask expands and forces some water out, so that it becomes lighter and rises. Warm air is lighter than cold air—which is the secret of most of the changes in the weather—so the weight being less on the surface of the water in the jar, again the water in the flask falls and it rises and in rising, turns the pointer. Also warm air holds more moisture; this acts on the catgut, twisting it, and helps to turn the pointer. You can dispense with the catgut, but it is a help. When the air gets colder, the reverse of all this happens, and the pointer goes the other way. So you have a barometer—on the surface of the water; a thermometer—in the top of the flask; and a hygrometer—in the catgut.

When the telltale falls, you may expect

(Continued on page 130)

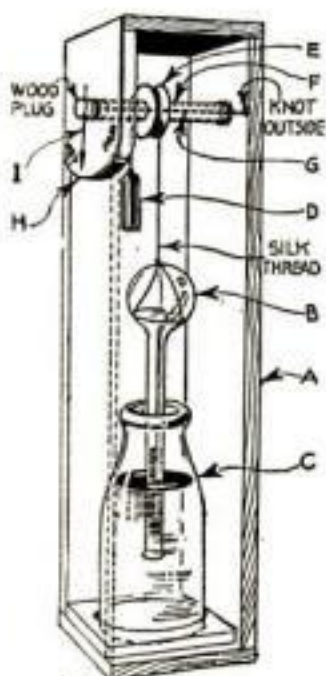

The telltale with one side removed to show construction

Two Supreme Achievements
in RADIOLAS

RADIOLA Grand

The finest principles of radio detection, amplification and loud speaking are embodied in the new Radiola Grand.

The Radiola Grand has been especially designed to receive broadcasting stations operating on the standard wave lengths of 360 and 400 meters, but an additional range is available up to 550 meters. By means of a new type of loud speaker, the entire family may receive broadcasted music and other entertainment and instruction.

A telephone jack is provided in order that head telephones may be employed for the reception of broadcasting over great distances.



Radiola Grand and Mahogany Stand with "B" Batteries, tubes and full instructions... \$350.00

RADIOLA IV

Radiola IV is a self-contained console-type broadcast receiver. The cabinet contains a regenerative receiver, a detector, two stages of audio frequency amplification, a new loud speaker of unsurpassed tone quality and all necessary batteries.

Radiola IV is not only a highly efficient receiver, embodying the latest developments in design, but is also a thing of beauty that will grace a drawing room or library.

Both of these Radiolas provide exceptional long-distance as well as local reception.

Ask your nearest dealer to show you the Radiola line.



Radiola IV, complete with 4 tubes (1 spare), all batteries, headset with telephone plug, and silk covered leads for antenna and ground... \$275.00



This symbol of quality is your protection

Radio **WORLD WIDE WIRELESS** Corporation of America

Sales Department:
Suite 2080, 233 Broadway
New York

District Offices:
10 So. LaSalle Street
Chicago, Ill.

433 California Street
San Francisco, Cal.

\$25.00 in PRIZES

See top of page 6 in front of book for full details

MECHANICAL DENTISTS
EARN \$200 to \$450 per month

A high grade, fascinating, dignified, and profitable profession. No experience or entrance requirements necessary. No license required. Big demand everywhere. Special Dentist Assistant's Course for Women.

Earn While You Learn
In America's Greatest Practical School

Individual instruction by modern up-to-date methods in America's best equipped Dental Laboratory and Clinic. Write for Free Trial Scholarship and Free Life Scholarship offer. Learn how easy it is to fit yourself for this big pay profession by the famous National Learn-by-Doing Method.

Send For Free Book "Mechanical Dentistry and Its Art" Today.

NATIONAL SCHOOL OF MECHANICAL DENTISTRY
Dept. 33, 506 SO. WABASH AVE., CHICAGO, ILLINOIS

Agents \$75.00 Weekly

Amazing new seller. **JEFFY JEANS** (not an overall) protects clothes while working around auto, shop, or home. On and off in 5 seconds. Cannot streak dirt or mud from shoes to clothes when putting on. Kept firmly in place by flexible steel bands. Will not wrinkle clothes. Made of high grade Ducking. One size fits everyone. Easily laundered.

150% PROFIT

Sell like hot cakes. Just show and sale is made. Nothing else like it. Low price. Make \$75.00 weekly easily. Write today for liberal Agency Proposition.

JEFFY JEANS, 223 W. Marquette Rd., Dept. D. Chicago, Ill.

W. L. DOUGLAS

\$5 \$6 \$7 \$8 & \$9 SHOES FOR MEN AND WOMEN

W. L. Douglas shoes are actually demanded year after year by more people than any other shoe in the world

BECAUSE W. L. Douglas has been making surpassingly good shoes for forty-six years. This experience of nearly half a century in making shoes suitable for Men and Women in all walks of life should mean something to you when you need shoes and are looking for the best shoe values for your money.

W. L. DOUGLAS shoes in style, quality, material and workmanship are better than ever before; only by examining them can you appreciate their superior qualities.

No Matter Where You Live

shoe dealers can supply you with W. L. Douglas shoes. If not convenient to call at one of our 110 stores in the large cities, ask your shoe dealer for W. L. Douglas shoes. Protection against unreasonable profits is guaranteed by the name and price stamped on the sole of every pair before the shoes leave the factory. Refuse substitutes. The prices are the same everywhere.

If not for sale in your vicinity, write for catalog.


TO MERCHANTS: If no dealer in your town handles W. L. Douglas shoes, write today for exclusive rights to handle this quick selling, quick turn-over line.

W. L. Douglas
President
W. L. Douglas Shoe Co.
124 Spark St. Brockton, Mass.



BOYS SHOES

\$4.50 & \$5.00

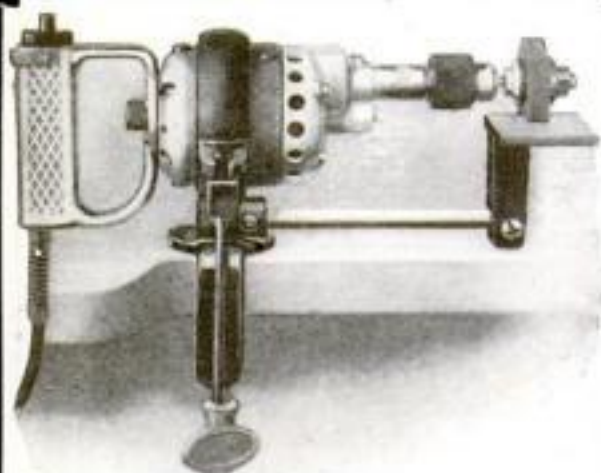

A Complete Machine Shop At a Low Price

HERE'S a tool that enables you to have a complete machine shop right in your home. It's the powerful, compact Jones Electric Hand Drill, selling at the low price of \$25. This drill can be clamped to a bench and used for grinding, polishing, buffing, sawing, or milling, by using the attachments shown below. These attachments are sold at a slight additional cost.

It is equipped with a universal high speed motor. Ventilating features eliminate heating. It is fitted with a Jacobs chuck. Will drill thru the toughest materials up to 3/4 inch in diameter.



A Drill Press for \$45.00

For those who want an automatic bench drill press no tool can be found superior to the Jones for the little money asked. In capacity and general construction it is the same as the hand drill described above. Write today for further information relative to these tools.

Agents Wanted

JONES DRILL & SPECIALTY CORP.

245 Seventh Ave., New York




SEND FOR THE INTERNATIONAL CATALOG



Our net price list. Full line of auto bodies and accessories for Fords at Wholesale Prices. Save big money on bodies by buying Direct from Factory.

FOR FORD—Prices from \$27.85 up. Factory to consumer direct—Pay only One Profit.
INTERNATIONAL BODY WORKS, 914 W. Ohio St., Dept. 8, Chicago, Ill.

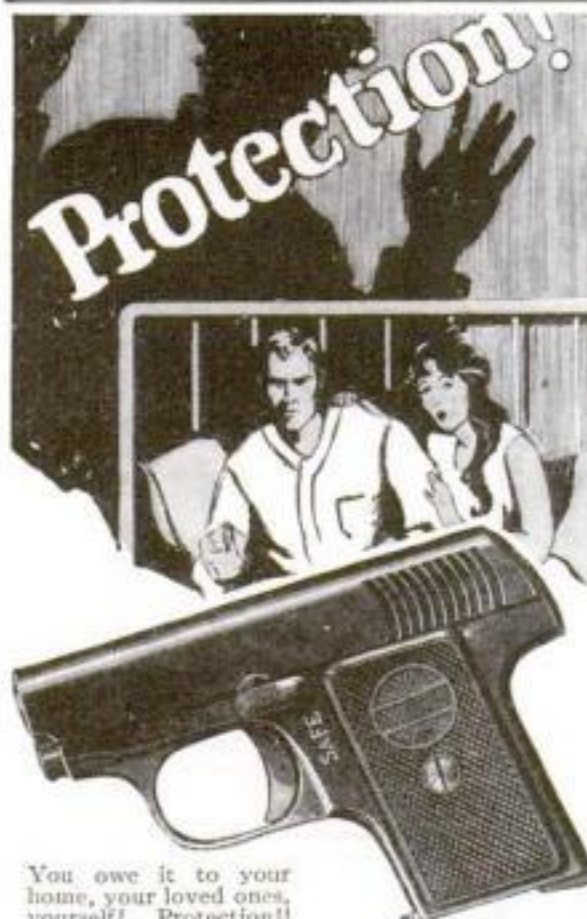

You owe it to your home, your loved ones, yourself! Protection! A beautiful little blue steel automatic 4 1/2 in. long by 3 3/4 in. high. Holds seven .25 cal. bullets—any standard automatic ammunition. An ideal gun for a woman. Absolutely safe. Substantial .32 cal. military model 6 1/2 in. long by 4 1/2 in. high. Shoots ten shots—any standard automatic ammunition. Both models are exceptionally fine guns that usually retail from \$15 and \$25 up. The very finest quality forged steel and expert workmanship throughout. ABSOLUTELY GUARANTEED against defective workmanship and materials! If you are not entirely satisfied, return within ten days and we will return your money at once.

SEND NO MONEY

unless you wish. Write clearly your name, address and model you wish and we will ship by return mail. You pay the postman upon arrival. Write for our new firearms catalog.

California Trading Company
Dept. 133 Terminal Bldg., Los Angeles

\$8.25 for 25 caliber 7 Shot Automatic
10.50 for 32 caliber 10 Shot Automatic
Including Cello Magazine.

THE HOME WORKSHOP

Simply Made Weather Telltale

(Continued from page 129)

southerly winds, with rain, especially if the clouds are from the same direction. You will get longer notice of a southerly than of a northerly wind. If the air is dry, but still it falls, expect snow in winter. If it rises, expect northerly winds and finer weather. The quicker it rises, the more wind you may expect. If the wind is in the south and it rises, expect fine weather. The slower it rises or falls, the longer will the coming weather last, and vice versa.

If it stops high and steady, expect dry, fine weather; the more it jumps about, the more unsettled the weather will be. A sudden rise is as likely to bring a storm as a sudden fall. But you will learn most by watching it and the clouds, which are great weather prophets to one who knows how to read them.

A Window Flower Garden

A CONVENIENT and decorative window garden may be made by attaching a ledge or board to the lower sash. The board must be as long as the glass is wide, and about 4 or 5 in. wide. A tiny railing on three sides is made from strips of wood about 3/8 by 5/8 in. and heavy wire.

Two other wires about 10 in. long are attached to the board at the ends and to



This neat flower pot holder is attached directly to the lower sash

the sash to serve as braces and hold the stand in a horizontal position. A screw through the shelf down into the lower sash rail will hold the stand in position and prevent it from being accidentally dislodged. When the lower sash is opened, the plants rise with it, thus allowing the unobstructed circulation of air.—B. E.

One Nail Holds Corner Piece

BY CUTTING out "dustless" corner pieces as shown, they can be fastened in place in stair corners and in the corners of rooms where they are needed with one nail apiece. Driving the nail slantwise into the corner draws in the center of the triangular piece firmly and makes a neat, quick method of fastening as shown here.



When I require a supply of these corner pieces, I simply cut them from scrap tin and paint them.—JOHN R. DODGE, Normal, Ill.

THE HOME WORKSHOP

Rig Makes Light Work of Drilling and Boring by Hand

By Henry S. Laraby


WHENEVER heavy drilling or boring is to be done in the home workshop and no machine is available, much labor may be saved by constructing a drill rig like the one illustrated. It is easily adjusted, has few parts, is very strong, and takes up no room when not in use. Either a regular hand brace can be used in connection with it, or a brace may be forged from a $\frac{1}{8}$ -in. rod.

Pressure is applied by simple adjustable lever



Pressure is obtained by means of a lever of oak or other hard wood, 40 in. long. The fixed end is fastened to a wall stud or a "two by four" at the back of the bench by means of a block, yoke, and wedge, which are adjustable as to height. The block has a lug, which engages a hole in the end of the lever and in the under side of the lever is a bearing for the brace.

Ample adjustment is provided for boring work of various sizes because the holes for the yoke are 4 in. apart and the wedge permits any adjustment within 4 in. A saw-

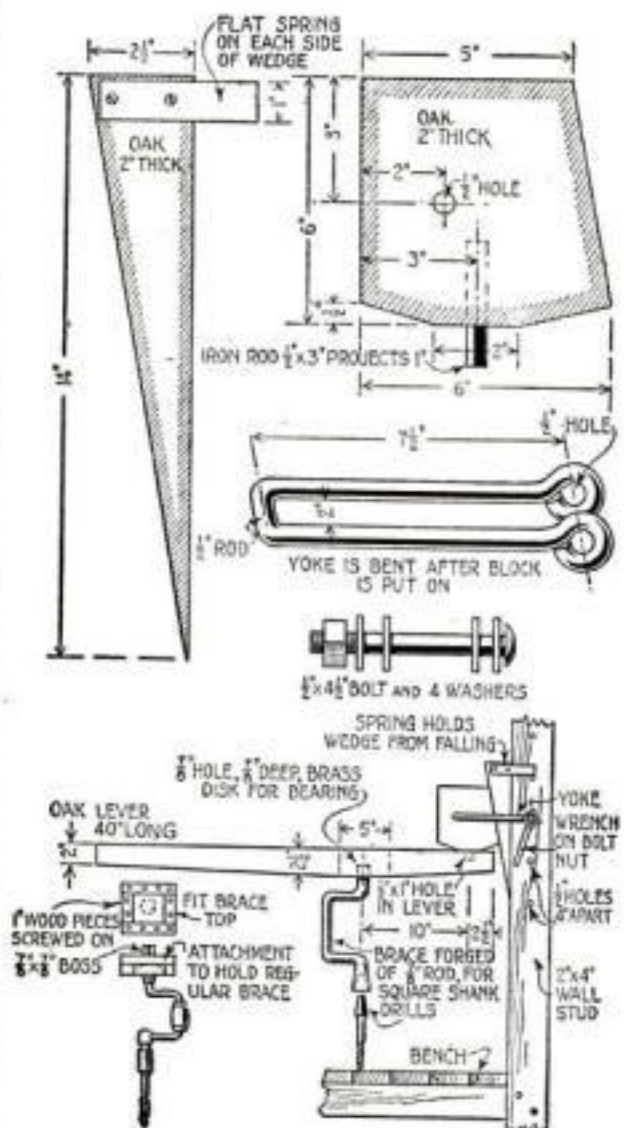

How the parts of the heavy boring rig are made and assembled

horse can be used in place of the bench. In fact, if the $\frac{1}{2}$ -in. holes in the stud are run from the floor up at 4-in. intervals, any working height may be obtained. In operation, the lever is pressed down under the left arm and the right arm is used to turn the brace.



Radio Catalogue FREE

One copy of this complete Catalogue of Radio Outfits, parts, Dictionary of Radio Terms, Instruction Book, and Guide to Successful Radio Work—one copy is yours Free.

Simply write us a post card and we will mail the complete book to you Free, by return mail.

It quotes the lowest prices, amazingly low prices on everything for the expert and the amateur. Every improved part, the most up-to-date outfits, everything that is needed of the most modern type—at the lowest possible prices.

It gives a list of broadcasting stations, and gives much information about radio construction and operation. Every one interested in Radio needs this complete catalogue and book of instruction.

Why Pay Higher Prices?

Montgomery Ward & Co. has for fifty years dealt on a Money-Back basis, absolutely guaranteeing everything they sell. With quality absolutely assured, why pay higher prices elsewhere? Write today for this Free Radio Book and see for yourself the Saving it will bring you.

One copy is yours Free. You need only write us a post card.

Write to the house nearest you. Address Dept. 5-R
Chicago Kansas City St. Paul Fort Worth Portland, Ore.

Montgomery Ward & Co.

— The Oldest Mail Order House is Today the Most Progressive —

Amateur Agents Wanted

to sell high-class radio sets and parts full or spare time. Liberal commission.



This molded variometer is one of our splendid values—

Catalog Free

Make money by selling your friends and neighbors this radio equipment at prices that will save them money.

complete only..... \$5.50

Columbia Radio Corporation
2757 Diversey Avenue, Chicago

Pay Nothing!



Save 25% on this solid gold, genuine diamond ring. Read this—the most amazing free trial offer ever made.

No Money Down—No C.O.D.

Mail the coupon below—don't enclose a penny—and we'll send you either the man's or lady's ring shown above on trial, all charges prepaid. Pay nothing when the ring arrives—no C.O.D. wear it a week—then decide. If you can duplicate this ring for \$50.00 anywhere, send it back at our expense and that ends the matter. If you decide to buy, send \$3.75 after trial, and pay \$3.75 a month until our special cut price of \$38.75 is paid. (Over 10 months to pay—no interest). Each ring is 14K solid gold, exquisitely hand made, engraved and beaded. The 18K white gold top is set with an extra brilliant, blue white, perfectly cut, top quality genuine diamond. (Regular \$50.00 value—now only \$38.75). You risk nothing on this wonderful offer! Mail coupon today! Be sure to state finger size.

Mail This Coupon

Harold Lachman Co., 204 So. Peoria Street, Dept. 1783 Chicago, Ill.

Send me free of all charges the solid gold, genuine diamond ring checked below, for a week's free trial. I enclose no money—I will pay nothing on arrival. At the end of one week I shall either return the ring to you by registered mail, or send you first payment of \$3.75, and then \$3.75 on the first of each month until your cash price of \$38.75 has been paid. Title remains with you until fully paid. I enclose my finger size.

☐ Lady's Ring A4250. ☐ Man's Ring A4450.

Name

Home Address

City..... State.....

Age..... Occupation.....

Copyright 1923, Harold Lachman Co.

SELL US YOUR SPARE TIME

You can earn \$15 to \$50 a week writing show cards in your own home.—No canvassing.—A pleasant profitable profession easily and quickly learnt by our new simple graphic block system. Artistic ability not necessary.—We teach you how, and supply you with work—Distance no object. Full particulars and booklet free.

WILSON METHODS LIMITED—DEPT. C
84 East Richmond, Toronto, Canada.



"We pay him \$100 a week"

"AND he's worth every cent of it. Came here several years ago asking for a job. He got just that—a small job at a small salary.

"Then I forgot about him—hardly knew he was on the payroll until one day I got a letter from the International Correspondence Schools telling me that he had enrolled for a course of home study. It was remarkable the way he went ahead.

"We pay him \$100 a week now and he's going to be earning even a larger salary some day. I wish we had more men like him."

HOW do you stand when your employer checks up his men for promotion? Does he think of you? Is there any reason why you should be selected? Ask yourself these questions fairly. You must face them if you expect advancement and more money.

One hour after supper each night spent with the I. C. S. in your own home will prepare you for the position you want in the work you like best.

Yes, it will! Put it up to us to prove it. Without cost or obligation, just mark and mail this coupon.

INTERNATIONAL CORRESPONDENCE SCHOOLS Box 7632-C, Scranton, Penna.

Without cost or obligation on my part, please tell me how I can qualify for the position or in the subject before which I have marked an X:

BUSINESS TRAINING DEPARTMENT

- | | |
|---|---|
| <input type="checkbox"/> Business Management | <input type="checkbox"/> Salesmanship |
| <input type="checkbox"/> Industrial Management | <input type="checkbox"/> Advertising |
| <input type="checkbox"/> Personnel Organization | <input type="checkbox"/> Better Letters |
| <input type="checkbox"/> Traffic Management | <input type="checkbox"/> Foreign Trade |
| <input type="checkbox"/> Business Law | <input type="checkbox"/> Stenography and Typing |
| <input type="checkbox"/> Banking and Banking Law | <input type="checkbox"/> Business English |
| <input type="checkbox"/> Accountancy (including C.P.A.) | <input type="checkbox"/> Civil Service |
| <input type="checkbox"/> Nicholson Cost Accounting | <input type="checkbox"/> Railway Mail Clerk |
| <input type="checkbox"/> Bookkeeping | <input type="checkbox"/> Common School Subjects |
| <input type="checkbox"/> Private Secretary | <input type="checkbox"/> High School Subjects |
| <input type="checkbox"/> Business Spanish <input type="checkbox"/> French | <input type="checkbox"/> Illustrating |

TECHNICAL AND INDUSTRIAL DEPARTMENT

- | | |
|---|--|
| <input type="checkbox"/> Electrical Engineering | <input type="checkbox"/> Architect |
| <input type="checkbox"/> Electric Lighting | <input type="checkbox"/> Blue Print Reading |
| <input type="checkbox"/> Mechanical Engineer | <input type="checkbox"/> Contractor and Builder |
| <input type="checkbox"/> Mechanical Draftsman | <input type="checkbox"/> Architectural Draftsman |
| <input type="checkbox"/> Machine Shop Practice | <input type="checkbox"/> Concrete Builder |
| <input type="checkbox"/> Railroad Positions | <input type="checkbox"/> Structural Engineer |
| <input type="checkbox"/> Gas Engine Operating | <input type="checkbox"/> Chemistry <input type="checkbox"/> Pharmacy |
| <input type="checkbox"/> Civil Engineer | <input type="checkbox"/> Automobile Work |
| <input type="checkbox"/> Surveying and Mapping | <input type="checkbox"/> Airplane Engines |
| <input type="checkbox"/> Metallurgy | <input type="checkbox"/> Agriculture and Poultry |
| <input type="checkbox"/> Steam Engineering <input type="checkbox"/> Radio | <input type="checkbox"/> Mathematics |

Name.....

Street Address..... 6-26-22

City..... State.....

Occupation.....

Persons residing in Canada should send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada.

FREE Radio Catalog



Our big stock of standard makes of radio sets, parts and supplies, fully illustrated. Play safe—buy standard equipment from a reliable house. We ship from stock.

Send \$6.50 for genuine Westinghouse WD-11 "peanut" tube—no storage battery needed. 60 cents extra for socket. Wonderful results.

JULIUS ANDRAE & SONS CO.

In business since 1890
119 Michigan Street - Milwaukee, Wis.

Agents

LARGE MANUFACTURER OF SHIRTS wants Agents to sell complete line of shirts direct to wearer. Exclusive patterns. Big values. No capital or experience required. Write for free samples.

MADISON SHIRT MILLS
507 Broadway, New York, N. Y.

The Shipshape Home How to Do the Odd Jobs

Papering Ceilings

ALTHOUGH the difficulty of papering ceilings is what deters many home workers from doing their own paperhanging, it is not really hard to do, and if the proper system is followed, an amateur can quickly learn to paper ceilings as deftly as a professional.

A plank, or two planks, long enough to reach from one wall to the wall opposite must be provided. It should be raised on tables or other supports so that the ceiling can be reached comfortably with the palms of your hands. A paperhanger's smoothing brush, or a clean whiskbroom, and a photographic roller are necessary, although a caster will take the place of the latter for rolling seams.

You will also need what I call a "little helper." This is made by nailing two wooden strips about 4 ft. long inside the



ends of a soapbox, as shown. A piece of lath is nailed across the top and on this is fastened a heavy sheet of pasteboard about 1 by 2 ft. This makes a light but firm stand.

After removing both selvage edges, cut the paper about 6 in. longer than the room is wide or long, depending upon which way the paper is to run. It is best always to have the seams run toward the light. Cut 5 or 6 lengths at a time and spread them, printed side down, one over the other on the kitchen table or whatever is to be used as a pasting table. Place the paper about 2 in. from the edge of the table, loosen the top strip, draw it toward you until the nearest edge is even with the edge of the pasting table, and apply paste for about 3 ft. from one end, brushing the edges outwardly. Double the paper about 1½ ft. from the end and fold the pasted surfaces together, taking care that the edges match on both sides, as shown at 1. Pull the strip along until you have an unpasted length on the pasting table and apply paste to another 3-ft. length. Lift the paper at the place where the end has been folded over the pasted surface and fold over the newly pasted section, as shown at 2. Repeat this process until the entire strip is pasted and folded as at 3.

Place the pile of paper on the little helper in such a position that when you take up the beginning of the strip the pasted side

(Continued on page 133)

DID you know that you can get Regenerative sets at reasonable price in RadioCraft's D-4, with the D-5 2-Step Amplifier? These fine sets are made of De Forest parts—and carried by De Forest dealers. See them!

THE RADIOCRAFT CO., INC.
139 Franklin St., Jersey City, N. J.



AGENTS Some Seller at \$175
Looks Like \$5.00 Worth Gives You \$1 Profit



\$12 an Hour! First Day Out

W. H. Marion, a beginner, made 36 sales in three hours, first day, \$36 profit! How? Our representatives introduce our products with a first sale of beautiful combination sets of Toilet Articles, Soaps, etc. You sell at half store prices—no fancy talk—sell on sight. Make 20 to 30 sales a day with DOLLAR profit on each. Easy to average \$100 a week. Could you ask more while introducing line, establishing a permanent business for yourself? Another plan calls for no deliveries, no investment, no delays. You bank quick profits. Also winning premium plan. Write quick for full details.

FORD FREE: No contest. Every producer gets a Ford Car absolutely free. Most amazing offer ever made. Don't waste a minute. Get letter into mails right now!

E. M. DAVIS COMPANY

Dept. 5703

Chicago

Stop Using a Truss



Reduced
Fac-Simile
Gold Medal

STUART'S PLAPAO-PADS are different from the truss, being mechanico-chemical applicators made self-adhesive purposely to hold the distended muscles securely in place. No straps, buckles or spring attached—cannot slip, so cannot chafe or press against the pubic bone. Thousands have successfully treated themselves at home without hindrance from work—most obstinate cases conquered. Soft as velvet—easy to apply—inexpensive. Gold Medal and Grand Prix. Process of recovery is natural, so afterwards no further use for trusses. We prove it by sending Trial of Plapao absolutely FREE. Write name on Coupon and send TODAY.

Plapao Co., 790 Stuart Bldg., St. Louis Mo.

Name.....

Address.....

Return mail will bring Free Trial Plapao.



Reduced
Fac-Simile
Grand Prix

AutoMenWanted



Big pay-jobs open now

Everywhere in California auto men are wanted. Good jobs at big pay open NOW. Men can't be trained fast enough to supply demand. California is crowded with autos. Has more autos to population than any other state in Union. Greatest shortage ever known of garages and skilled auto mechanics.

Learn Auto Trades in Coast's Biggest School

Now's YOUR opportunity to step into this big money-making business. YOU can become an electrician, mechanic, ignition expert, garage foreman or used-car appraiser after a few short weeks training. We'd like to tell you here how thousands of men have gained big-pay auto jobs through NATIONAL training. But it's a long story, and we've put it all in a handsome illustrated book which also tells everything about NATIONAL AUTOMOTIVE. Wonderful big training shops right next door to 130-acre city park. Ball parks, swimming pool, world's largest stadium—all free to you. Send for this book now.

Your Success Is Sure After NATIONAL Training

Hundreds of men write: "I have increased my earnings 100%." "I have built a wonderful garage business, and owe it all to National." "I am well satisfied with National training; am sending my brother to take the course."

It's the National practical shop training that counts. Actual construction work on all types of autos. Ignition, battery and lath work—driving and vulcanizing. Special advanced electrical course FREE. You KNOW autos when you complete the NATIONAL course.

Special Low Tuition offer now. Earn your room and board, and a little more, while learning. Living expenses low in California—and it's worth a million dollars to live there. Find out about everything in interesting illustrated auto book. Send for this big FREE book. Mail the coupon NOW.

Send for Big Free Auto Book

NATIONAL AUTOMOTIVE SCHOOL
Dept. 24, 811 S. Figueroa St., Los Angeles, Cal.
Please send me your 72-page illustrated Auto Book—absolutely FREE, postage prepaid.

Name.....
Street No.....
City.....State.....

"Old Town Canoes"



ALONE— with the Only Girl

An "Old Town Canoe" means happiness for you and the only girl. Means afternoons together, drifting down winding streams—lazy-paddling on quiet waters.

Canoeing is one of the greatest of summer pleasures—and the cheapest. For an "Old Town Canoe" will last you for years. And it is the lowest-priced canoe made. \$54 up from dealer or factory. It is the lightest and steadiest of canoes, too!

The new 1923 catalog shows all models in full colors. Write for one today. It is free.

OLD TOWN CANOE CO.
1393 Main Street, Old Town, Maine, U. S. A.

THE HOME WORKSHOP

The Shipshape Home

(Continued from page 132)

will be toward the ceiling. Lift the stand on the scaffold and place it about 4 ft. from the end where you intend to begin papering.

Take the end of the paper in both hands and attach about 1 ft. of it to the ceiling by pressing it with both hands and smoothing it with the brush or whisk. Take every care to start with the long edge of the paper exactly even with the edge of the ceiling and wall. If you do not start right, you will have to take the paper off and begin over again, but that is not difficult to do if you have not taken more paper off the little helper than you can handle.

If there are any wrinkles that cannot be brushed out, loosen the paper back to the wrinkles and brush it on again. Work quickly but do not hurry too much, as the paste will remain damp for some time. Hold the paper against the ceiling with one hand and move the helper about 2 ft. with the other, letting the paper slip off the pile. Brush the center of the paper until the slack is taken up and then brush outwardly toward each edge. Repeat this process until you are about 4 ft. from the wall.

Then, using a roll made of odds and ends of cut pieces, take the remaining paper from the helper and support it with the roll. You can then brush down the center clean to one end, and return and brush out each edge. Look back to see if there are any wrinkles or bubbles. If so, smooth them with the roller.

Paste another length and repeat the procedure. See that the edges overlap so that one edge just covers the other. The tendency is to have too large an overlap. When the second sheet has been applied, roll the seam.—A. M. SMYTH, Germantown, Pa.

Painting Hints

FOR work that is smooth and in good condition, 1 gal. of paint of standard quality will cover from 600 to 800 sq. ft. with one coat or half that with two coats.

Fill all nail holes, cracks, and crevices with pure linseed oil putty, after the first priming coat is dry.

For house painting, use a long flat or oval bristle wall brush, and see that the paint is well worked into the wood. In applying the priming coat, do not try to cover the grain of the wood simply by piling on the paint thickly. Several thin coats are better than one heavy one.

For three-coat work, the second coat should have sufficient turpentine added to reduce the surface gloss. The third coat will then stick better than it would to a glossy second coat. If the paint for the finishing coat seems somewhat heavy, add a little raw linseed oil. Always allow at least 48 hours between coats.

Choosing Colors

IN SELECTING tints for house painting, it is best not to duplicate the colors of neighboring houses, but to choose colors that will harmonize. If you wish your house to stand out, use the lighter tints. Brilliant colors are best for small houses.

EARN up to \$400 per Mo. Living Expenses Paid

Big Opportunities for YOU in Hotel Work

More Positions Open
Than We Can Fill

80,000 men and women wanted by leading hotels. Opportunities unlimited—need not half supplied. New Hotels now building asking us for graduates.

A big profession—new, uncrowded. Good pay, good quarters, rapid advancement. A chance to live in luxury among people worth while.

How to Prepare Yourself

You can qualify for a good-paying position by devoting spare time at home to a series of easily understood, inexpensive lessons, known as the Hotel Operation and Management Course covering every phase of the hotel business. Compiled by nationally known hotel experts; our method of training endorsed by leading hotel executives such as Roy Carruthers, Managing Director, The Waldorf-Astoria, New York; Senator Van Orman of the Van Orman hotels in the Middle West, and others.

WANTED

Standard Business Training Institute graduates are wanted for following Positions open (partial list):

2 Ass't. Managers
Salary \$300-\$400 Mo.
Apartment and Meals

4 Room Clerks
Salary \$225-\$250 Mo.
Meals

2 Mail Clerks
Salary \$150 Mo.
Meals

1 Steward
Salary \$375-\$435 Mo.
Meals

1 Housekeeper
Salary \$175 Mo.
Apartment and Meals

12 Floor Clerks
Salary \$100-\$125 Mo.
Meals

6 Food Checkers
Salary \$90 Mo.
Room and Meals

More positions open
than we can fill

A POSITION IS WAITING FOR YOU

More applications received daily for our graduates than we can supply. One new

750 - room hotel has placed order with us to fill every position with our graduates. Positions ready to be filled

in all parts of America, large and small hotels. Will you qualify? Mail this coupon today for booklet and latest Employment Bulletin listing many positions open.



Standard Business Training Inst.,
1188 Carlton Court Buffalo, N. Y.

STANDARD BUSINESS TRAINING INST.
1188 Carlton Court, Buffalo, N. Y.

Send me free booklet No. 1188 giving full information about Hotel Operation and Management Course; also Employment Bulletin.

Name.....

Street.....


City.....

THE HOME WORKSHOP

Table Makes Inexpensive Desk for Small Shop

AN OAK rolltop desk would be out of place in the small workshop and would soon get scratched and scarred, but a desk almost as serviceable for keeping correspondence, reference books, plans, and miscellaneous data, can readily be made from a kitchen table. Such a table in unpainted pine or oak can be obtained for a few dollars.

Fix a sheet of zinc to the top of the table, fasten two uprights at the ends, as shown,

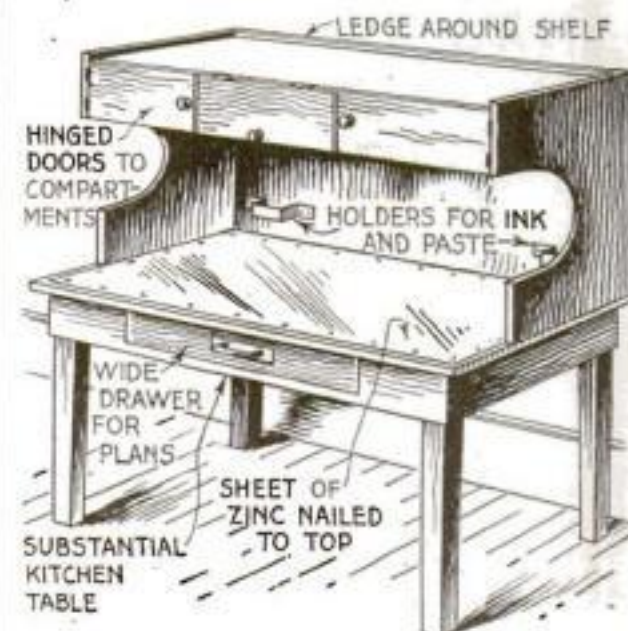


Made for a few dollars, this modified table serves every need of a desk in the home workshop

and make a boxlike shelf arrangement with hinged doors. The zinc will stand unlimited abuse and can easily be kept clean by rubbing it with a piece of waste. The long drawer under the table top holds rolled prints, while the smaller compartments above provide a place for drawing instruments, books, papers, miscellaneous data and other items that cannot safely be placed in a bench drawer.—H. L. F.

Tractor Pulley Drives Tool Grinder Clamped to Wheel

IN SHARPENING those farm tools that ordinarily are sharpened on an emery or carborundum hand power grinder, much time can often be saved by driving the grinder from the tractor pulley, as illustrated.


The handle of the grinder is removed and a 5- or 6-in. pulley substituted. The

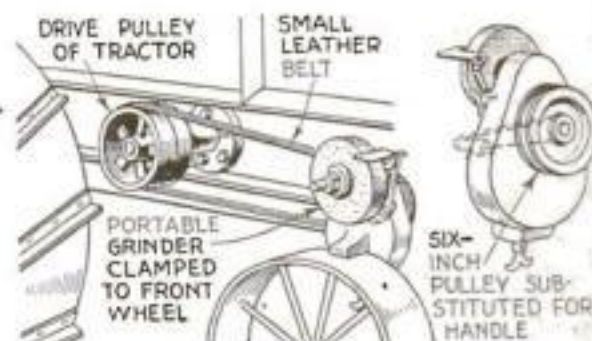

A labor saving arrangement for the farmer in sharpening tools and blades preparatory to spring work

grinder is then clamped to the rim of the tractor wheel or to any support that will bring its pulley in line with the broad face of the tractor drive pulley, and a short length of belting is used to connect the two.

If several cutting wheels are provided for the grinder, practically every form of knife tool, from a mower blade to a circular saw, can be sharpened in this way.—G. A.

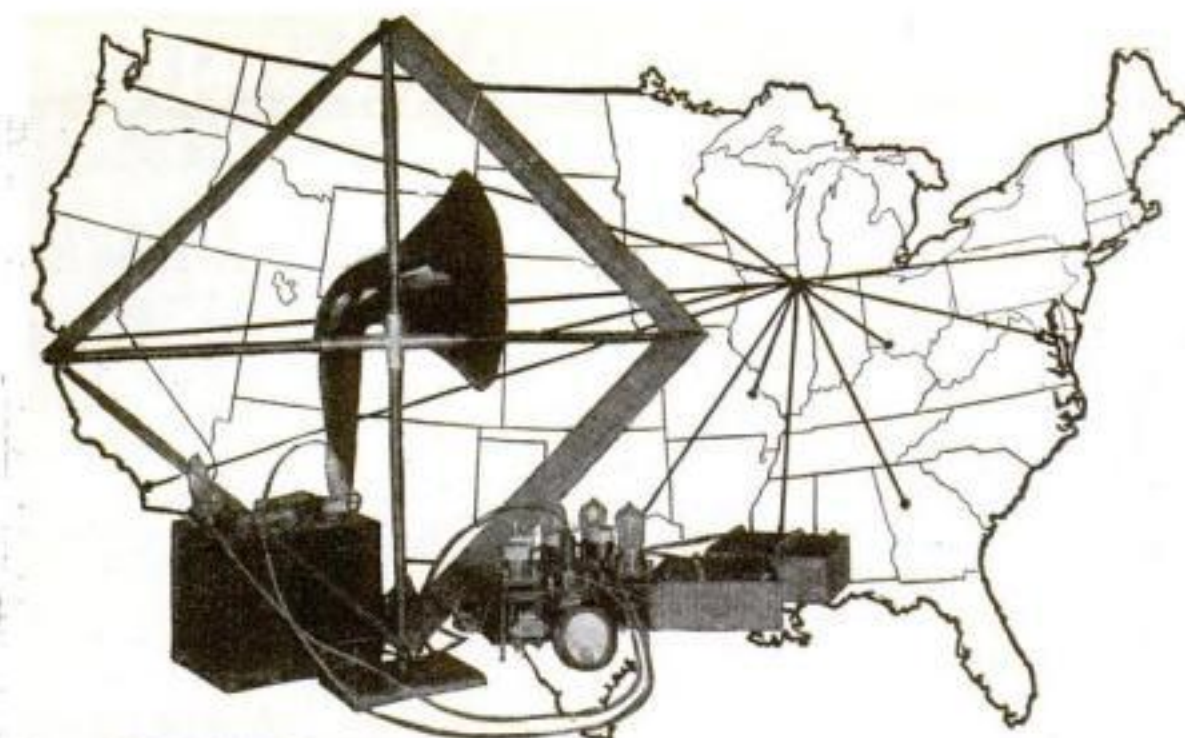

Erla radio frequency transformers are used exclusively in the new Quad-Six circuit, being responsible for its efficiency in large measure. Types AB1, AB2, AB3. List, \$4.

Four Tubes Now Do the Work of Seven

Again Erla offers invaluable contribution to radio science. The Quad-Six Super-Radio-Frequency Circuit—an Erla achievement—takes first place among the notable discoveries of the year.

Six stages of amplification—four radio and two audio—are secured with the use of but three amplifying tubes, and a detector, giving the efficiency of the best seven-stage circuits of conventional design.

Ask your dealer for our Special Bulletin No. 14, giving full information about this latest and most efficient of circuits, with complete directions for installing. Or write us, giving your dealer's name.

ERLA

Electrical Research Laboratories
Dept. F 2515 Michigan Ave., Chicago

\$258 Every Week



That's what R. Berger makes by just showing himself the amazing New Kind of Heat that does away with dirty coal and wood, eliminates worry about coal shortage and high prices. Hundreds making fortunes, too, with Oliver Oil-Gas Burner, 3 times the heat of coal—at turn of valve. Burns 95% air, 5% oil. 100,000 odd. Sell it! Agents clean up. Write for exclusive territory and special offer at once. Oliver Oil-Gas Burner & Machine Co., 2007-O Oliver Bldg., St. Louis, Mo.



1/4 H.P. 110 Volt \$13.50
A. C. Motor

(WORTH ABOUT DOUBLE)

Has many fine exclusive features

Grinder and Buffer \$25.00
—6 and 7 inch wheels, same motor fan-cooled and dust proof.

Send cash with order. Our money-back guarantee protects you. Write for Bulletins describing these and other sizes.

NORTHWESTERN ELECTRIC CO.
410-420 S. Hoyne Ave., Chicago, Ill.

We Pay \$7 a Day



Wonderful invention. The SERE-NOLA does more than machines costing 10 times its price. Orders taken by our agents for over a thousand a week—making from \$7 to \$21 a day. Big demand. Easily carried with you anywhere. Built in just like a suitcase. Fully guaranteed. Low price.

Easy to Take Orders
No collecting. Pay you every day. Get started at once. Territory given. Write for terms.

PERRY-LUDLOW CO., S. 647 DAYTON, O.



Italian Period Buffet

Yours for 20c a Day

A complete Dining Suite if you wish or single pieces in this same design, the imposing Italian Renaissance. This Buffet, China Cabinet, Chairs, Table, all in genuine American Walnut, the popular two-tone finish. Description, low prices, easy terms, in our big Larkin Book of Better Homes, showing over 1000 attractive offers of Furnishings for the home. Check below for offer interested in.

1 To 4 Years To Pay

- | | |
|---|--|
| <input type="checkbox"/> Furnishings | <input type="checkbox"/> Symphonic Player Pianos |
| <input type="checkbox"/> Symphonic Pianos | <input type="checkbox"/> Symphonola Phonographs |

(Check offer and mail ad Today)

Get at once our money-saving Factory-to-Family prices on these attractive Furnishings and Musical Instruments.

Get Our Low Prices

Hurry this ad—check offer—with full name and address TODAY for big FREE book.

Larkin Co Inc.

Desk FPSM-323

BUFFALO, N. Y.

This One



NEBK-2S6-A76U





Announcing the New Cunningham Amplifier Tube

Type C-301-A

List Price \$9.00

The most efficient vacuum tube ever placed on the market for amateur and experimental use. The engineers of the General Electric research laboratories have at last succeeded in perfecting a tube that every owner of a radio set has been waiting for.

**Greater Power Amplification
Only $\frac{1}{4}$ Amp. Filament Current**

THIS new and improved Cunningham C-301-A Amplifier is a high vacuum tube designed for use as an amplifier and detector, containing a new Tungsten Filament, the characteristics of which are long life, low power consumption, low operating temperature and greater power amplification than any previous amplifier tube. The tube has a standard four prong base, and the glass bulb has the same dimensions as the C-300 and the C-301.

The greatly reduced filament current permits the use of four of these tubes without exhausting the A battery any faster than when using one of the previous type of amplifier tubes.

Complete instructions for the care and efficient operation of this new Amplifier Tube are packed with every tube.

Insert a C-301-A in your amplifier set today. Note the improved quality and increased audibility.

The Cunningham Technical Bureau is at your Service. Address your problems to Dept. P

E. J. Cunningham

248 First Street
San Francisco, California

154 W. Lake Street
Chicago, Illinois



There are Corona Sales rooms and service stations in all parts of the world. Above is a glimpse of the Corona store in Rochester, N. Y.

Typewriter men knew this machine was coming!

*The completeness of an office typewriter
The convenience of a portable typewriter*

"SOME day there will be a typewriter that is complete without being heavy or bulky"—that is what typewriter men have long predicted, and their prophecy is fulfilled in the New Corona.

Here are just a few of the things you should particularly notice:

Completeness: The New Corona has an automatic ribbon reverse, two color ribbon, back spacer, combined line space and carriage return lever, margin release, etc. Compare it with any office machine.

Convenience: The New Corona is far more convenient than a standard office typewriter, because

it weighs less than seven pounds and you can fold it up, take it with you, typewrite anywhere.

Range of Work: Corona has a standard 10 inch carriage (wider than any other portable typewriter). It takes a No. 10 envelope with ease. Corona writes stencils better than most large machines, does manifolding perfectly.

Durability: Consider that Corona has half a million users, more than

CORONA

The Personal Writing Machine

REG. U. S. PAT. OFF.

Built by

CORONA TYPEWRITER CO., Inc.
112 MAIN STREET GROTON, N. Y.

all other portables combined, and that it has been giving satisfactory service for sixteen consecutive years, a record not even approached by any other portable typewriter.

Speed: The New Corona is built for swiftness. Its standard portable keyboard with right and left shift keys is the simplest of all typewriter keyboards and therefore the easiest to memorize and use. For the touch system, the keyboard is ideal because one's hands never need to leave their original "positioning."

No increase in price \$50 complete with case. (In Canada \$69.)

To locate the nearest Corona Store, consult your phone book or write us for new descriptive folder No. 12.

TRADE MARK Red Devil Tools

Every Good Tool for the Mechanic



"Red Devil" Slip Joint Plier No. 1226. The curved lower jaw will grip pipes, nuts, bolts and irregular objects—and hold on. Size 7 inches—nickel plated. Price, each..... **\$1.20**



"Red Devil" Slip Joint Plier No. 1024. The thin nose gets into tight corners. The slip joint gives a wide range in the size of things that can be gripped. The screw driver end and wire cutter add to the number of things you can do with it. Size 6 1/2 inches, nickel plated. Price, each.. **\$1.00**



"Red Devil" Glass Cutter No. 1024. The standard glaziers' tool of the world. Equipped with the famous "Red Devil" steel cutting wheel—each one hand honed and tested to cut clear, clean and sharp. Price, each.. **20c**

AND every good tool for the motorist, householder and glazier, too!

"Red Devil" Tools are sturdy—designed for hard work and long wear. They make hard jobs easy. "Red Devil" Tools are high quality tools, not high-priced.

The "Red Devil" trade mark stands for absolute dependability. It represents over a quarter century's experience and careful study built into each tool. That the design has been scientifically worked out,—that the material is the best obtainable, carefully selected for the particular use to which the tool will be put, and that the workmanship is as excellent as special training and rigid inspection can make it.

"Red Devil" Tools Comprise:

Pliers	Mitre Boxes
Nippers	Wrenches
Fence Tools	Cold Chisels
Glass Cutters	Punches
Snips	Hack Saw Frames
Chain Drills	Hack Saw Blades
Screw Drivers	Electricians' Tools
Auger Bits	Linemen's Tools

and many other tools

"Red Devil" Tools can be purchased at every reliable hardware store. If not in stock, order direct from our factory.

The "Red Devil" mechanic's tool booklet will help you select the tools best suited for your particular purpose—it's yours for the asking.

SMITH & HEMENWAY CO., Inc.

Manufacturers of "Red Devil" Tools

264 BROADWAY,

NEW YORK, N. Y.



"Red Devil" Adjustable Wrench No. 90 will fit any nut, and will not work loose. This style of wrench gives you a better leverage than the old monkey wrench, and is a more convenient shape for getting into difficult places. Sizes: 4, 6, 8, 10 and 12 inches. Price, each, 6 inch size, **65c**



"Red Devil" Chain Drill No. 2018. With it you can easily do hundreds of repair jobs you would otherwise send to a machine shop. Price, each.. **\$4.80**



"Red Devil" Snips No. 578. Whenever you have any rough cutting to do—from rubber washers to sheet iron—you have need for these handy snips. Size 7 inches. Price, each..... **90c**



GODELL-PRATT

1500 GOOD TOOLS

With good tools you can
“Do it yourself!”

Hand and Breast
Drill No. 1616.
Length,
14½ inches.
Net weight,
2 pounds.
Price, \$4.50

EVERY tool bearing the name Goodell-Pratt is a quality tool. It is so well designed that it does the work for which it is intended with the least effort on your part. It is so beautifully made and finished that you like to look at and admire it almost as much as you like to work with it.

Hand and Breast Drill No. 1616 is only one of sixty different hand, breast, and automatic drills made by Goodell-Pratt. It is about as useful an all-round drill as the average private mechanic can own.

You should be familiar with the other types of Goodell-Pratt Drills if you specialize on any particular kind of work.

Go to your hardware dealer. Ask him to show you Goodell-Pratt Hand and Breast Drill No. 1616, and the other Goodell-Pratt Drills he carries. Tell him you are interested in tools made by toolsmiths for tool experts. He will show you some of the best tools you ever saw; and if he hasn't all of the 1500 Good Tools we make, he will get the ones you want promptly.

Specifications of No. 1616 Drill

The Handle, Side Handle and Grip are all polished hardwood. The Frame is aluminum, for strength and lightness. The Gears all have machine-cut teeth. The Pinion Gear is steel. The Large Gear is iron enameled red, with the name Goodell-Pratt in gold. The Guard is hardened steel and holds the gears from slipping under extra pressure. The Steel Spindle is accurately turned and runs in ball bearings, which keeps end-thrust friction out of the tool and puts it into the job. The Chuck is all steel, with three hardened jaws that grip all round-shank drills up to ¾ inch diameter.

GOODELL-PRATT COMPANY

Greenfield, Mass., U. S. A.

Toolsmiths